

# F50C – 3U CompactPCI® PowerPC® MPC8548 Conduction Cooled SBC

- 32-bit/33-MHz cPCI system slot
- 1 slot, 9 HP front, rear I/O
- MPC8548 (or MPC8543), up to 1.5 GHz
- Up to 2 GB (ECC) DDR2 SDRAM
- Up to 128 KB FRAM, 2 MB SRAM
- Up to 16 GB SSD Flash
- FPGA for user-defined I/O functions
- MENMON BIOS for PowerPC® cards
- -40 to +85°C Tcase screened
- Conduction cooling



The F50C is a versatile, rugged PowerPC® based single-board computer for embedded applications with [conduction cooling](#). It is controlled by an MPC8548, or optionally an MPC8543 PowerPC® CPU (alternatively with encryption unit) with clock frequencies between 800 MHz and 1.5 GHz. The SBC is equipped with ECC-controlled, soldered-on DDR2 RAM for data storage, with up to 16 GB of solid-state Flash disk for program storage as well as industrial FRAM and SRAM. The CPU card provides up to three Gigabit Ethernet channels, four USB ports, up to two SATA interfaces and up to 64 user-definable I/O lines controlled by its onboard FPGA. These interfaces can be combined in many variations and are all available at the rear using the board's J2 connector. For first operation and service purposes, the board also includes a UART-to-USB port accessible at the front panel.

The F50C is based on a standard 3U CompactPCI® card that is embedded into a dedicated CCA frame for conduction cooling (CCA = conduction cooled assembly). The 9-HP assembly can be used with MEN's [conduction-cooled subrack](#). It is designed for operation in a -40°C to +85°C environment. For convection cooling, the [F50P model](#) is also available, which comes

with a tailor-made heat sink for extended temperatures.


The large FPGA on the F50C allows to add additional user-defined functions such as graphics, touch, serial interfaces, fieldbus controllers, binary I/O etc. for the needs of the individual application in an extremely flexible way. Before boot-up of the system, the FPGA is loaded from boot Flash. Updates of the FPGA contents can be made inside the boot Flash during operation.

Equipped with a PCI-bridge chip, the F50C offers a full CompactPCI® interface (system slot functionality) for reliable system expansion. Apart from that, the F50C can also be used as a busless, stand-alone board, with power supply from the backplane.

The soldered components on the F50C withstand shock and vibration, and the board design is optimized for conformal coating.

The F50C comes with MENMON support. This firmware/BIOS can be used for bootstrapping operating systems (from disk, Flash or network), for hardware testing, or for debugging applications without running any operating system.

## Diagram

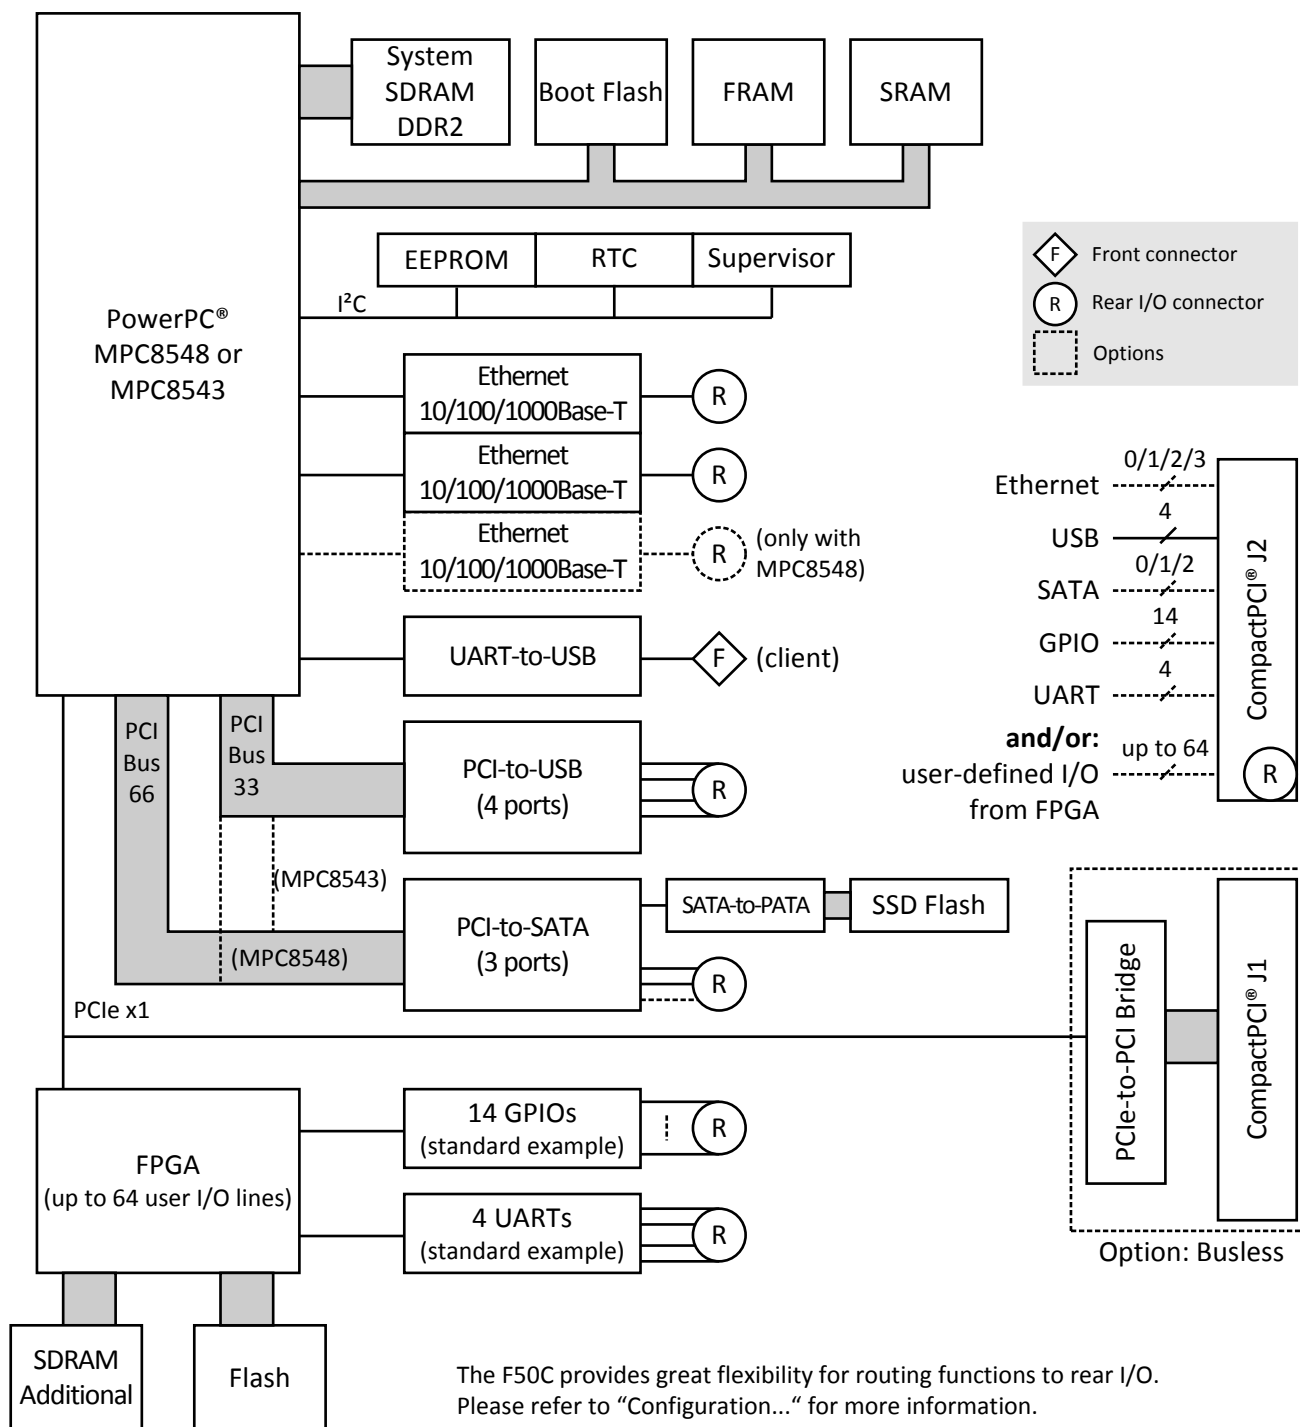

## Technical Data

CPU	<ul style="list-style-type: none"> <li>■ PowerPC® PowerQUICC™ III MPC8548, MPC8548E, MPC8543 or MPC8543E <ul style="list-style-type: none"> <li>□ 800MHz up to 1.5GHz</li> <li>□ Please see Standard Configurations for available standard versions.</li> <li>□ e500 PowerPC® core with MMU and double-precision embedded scalar and vector floating-point APU</li> <li>□ Integrated Northbridge and Southbridge</li> </ul> </li> </ul>
Memory	<ul style="list-style-type: none"> <li>■ 2x32KB L1 data and instruction cache, 512KB/256KB L2 cache integrated in MPC8548/MPC8543</li> <li>■ Up to 2GB SDRAM system memory <ul style="list-style-type: none"> <li>□ Soldered</li> <li>□ DDR2 with or without ECC</li> <li>□ Up to 300 MHz memory bus frequency, depending on CPU</li> </ul> </li> <li>■ Up to 16GB soldered Flash disk (SSD solid state disk)</li> <li>■ Up to 32MB additional DDR2 SDRAM, FPGA-controlled, e.g. for video data</li> <li>■ 16MB boot Flash</li> <li>■ 2MB non-volatile SRAM <ul style="list-style-type: none"> <li>□ With GoldCap backup</li> </ul> </li> <li>■ 128KB non-volatile FRAM</li> <li>■ Serial EEPROM 4kbits for factory settings</li> </ul>
Mass Storage	<ul style="list-style-type: none"> <li>■ Parallel IDE (PATA) <ul style="list-style-type: none"> <li>□ Up to 16GB soldered ATA Flash disk (SSD solid state disk)</li> </ul> </li> <li>■ Serial ATA (SATA) <ul style="list-style-type: none"> <li>□ Up to two ports via rear I/O J2</li> <li>□ Transfer rates up to 150MB/s (1.5 Gbit/s)</li> <li>□ Via PCI-to-SATA bridge</li> <li>□ <a href="#">See interface configuration matrix showing possible I/O combinations (PDF)</a></li> </ul> </li> </ul>
I/O	<ul style="list-style-type: none"> <li>■ USB (host) <ul style="list-style-type: none"> <li>□ Four USB 2.0 host ports</li> <li>□ Via rear I/O J2</li> <li>□ OHCI and EHCI implementation</li> <li>□ Data rates up to 480Mbit/s</li> </ul> </li> <li>■ USB (client) <ul style="list-style-type: none"> <li>□ One USB client port on series A connector at front panel</li> <li>□ Via UART-to-USB converter</li> <li>□ For first operation and service</li> <li>□ Data rates up to 115.2kbit/s</li> <li>□ 16-byte transmit/receive buffer</li> <li>□ Handshake lines: none</li> </ul> </li> <li>■ Ethernet <ul style="list-style-type: none"> <li>□ Up to three 10/100/1000Base-T Ethernet channels with MPC8548/E (two channels with MPC8543/E)</li> <li>□ Via rear I/O J2</li> <li>□ <a href="#">See interface configuration matrix showing possible I/O combinations (PDF)</a></li> </ul> </li> <li>■ User-defined I/O <ul style="list-style-type: none"> <li>□ FPGA-controlled</li> <li>□ Up to 64 I/O lines</li> <li>□ Connection via rear I/O J2</li> <li>□ Standard version provides 4 UARTs and 16 GPIO lines</li> <li>□ <a href="#">See interface configuration matrix showing possible I/O combinations (PDF)</a></li> </ul> </li> </ul>
Rear I/O	<ul style="list-style-type: none"> <li>■ Four USB 2.0</li> <li>■ Up to three 1000Base-T Ethernet</li> <li>■ Up to two SATA</li> <li>■ Up to 64 I/O lines, FPGA-controlled <ul style="list-style-type: none"> <li>□ Reduces Ethernet/SATA interfaces</li> <li>□ <a href="#">See interface configuration matrix showing possible I/O combinations (PDF)</a></li> </ul> </li> </ul>

## Technical Data

<b>FPGA</b>	<ul style="list-style-type: none"> <li>■ Standard factory FPGA configuration: <ul style="list-style-type: none"> <li>□ Main bus interface</li> <li>□ <a href="#">16Z043_SDRAM</a> - Additional SDRAM controller (32 MB)</li> <li>□ <a href="#">16Z034_GPIO</a> - GPIO controller (rear I/O 14 lines, 2 IP cores)</li> <li>□ <a href="#">16Z125_UART</a> - UART controller (controls rear I/O COM1..4)</li> </ul> </li> <li>■ The FPGA offers the possibility to add customized I/O functionality. See FPGA.</li> </ul>
<b>Miscellaneous</b>	<ul style="list-style-type: none"> <li>■ Real-time clock with GoldCap backup</li> <li>■ Temperature sensor, power supervision and watchdog</li> </ul>
<b>CompactPCI® Bus</b>	<ul style="list-style-type: none"> <li>■ Compliance with CompactPCI® Core Specification PICMG 2.0 R3.0</li> <li>■ System slot</li> <li>■ 32-bit/32-MHz PCIe®-to-PCI bridge</li> <li>■ V(I/O): +3.3V (+5V tolerant)</li> </ul>
<b>Busless Operation</b>	<ul style="list-style-type: none"> <li>■ Board can be supplied with +5V, +3.3V and +12V from backplane, all other voltages are generated on the board</li> <li>■ Backplane J1 connector used only for power supply</li> </ul>
<b>Electrical Specifications</b>	<ul style="list-style-type: none"> <li>■ Supply voltage/power consumption: <ul style="list-style-type: none"> <li>□ +5V (-3%/+5%), 800mA approx.</li> <li>□ +3.3V (-3%/+5%), 350mA approx.</li> <li>□ ±12V (-5%/+5%), 1A approx.</li> </ul> </li> </ul>
<b>Mechanical Specifications</b>	<ul style="list-style-type: none"> <li>■ Dimensions: <ul style="list-style-type: none"> <li>□ CompactPCI® 3U board embedded in MEN-standard 3U-CCA frame</li> <li>□ <a href="#">For use with MEN's conduction cooled subrack, 0701-0054</a></li> </ul> </li> <li>■ Front panel: 9HP with cut-out for USB</li> <li>■ Weight: 620g</li> </ul>
<b>Environmental Specifications</b>	<ul style="list-style-type: none"> <li>■ Temperature range (operation): <ul style="list-style-type: none"> <li>□ -40..+85°C Tcase (CCA frame) (screened)</li> <li>□ 0..+60°C Tcase (CCA frame) (screened, with 16 GB SSD Flash disk)</li> <li>□ <a href="#">Convection cooled variety F50P also available</a></li> </ul> </li> <li>■ Temperature range (storage): -40..+85°C</li> <li>■ Relative humidity (operation): max. 95% non-condensing</li> <li>■ Relative humidity (storage): max. 95% non-condensing</li> <li>■ Altitude: -300m to + 3,000m</li> <li>■ Shock: 15g/11ms</li> <li>■ Bump: 10g/16ms</li> <li>■ Vibration (sinusoidal): 1g/10..150Hz</li> <li>■ Conformal coating on request</li> </ul>
<b>MTBF</b>	<ul style="list-style-type: none"> <li>■ 150,290h @ 40°C according to IEC/TR 62380 (RDF 2000)</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers</li> </ul>
<b>EMC</b>	<ul style="list-style-type: none"> <li>■ Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>■ MENMON</li> </ul>
<b>Software Support</b>	<ul style="list-style-type: none"> <li>■ Linux</li> <li>■ VxWorks®</li> <li>■ QNX® (on request; support of the FPU is currently not provided by QNX®)</li> <li>■ INTEGRITY® (Green Hills® Software) support available. Please contact Green Hills® for further information.</li> <li>■ OS-9® (on request)</li> <li>■ <a href="#">For more information on supported operating system versions and drivers see Downloads.</a></li> </ul>

## FPGA

---

This product offers the possibility to add customized I/O functionality in FPGA.

### Flexible Configuration

- Customized I/O functions can be added to the FPGA.
- It depends on the board type, pin counts and number of logic elements which IP cores make sense and/or can be implemented. Please contact MEN for information on feasibility.
- [You can find more information on our web page "User I/O in FPGA"](#)

### FPGA Capabilities

- FPGA Altera® Arria® GX AGX35C
  - 33,520 logic elements
  - 1,348,416 total memory bits
  - Connected to CPU via PCI Express® x1 link
- Connection
  - Available pin count: 64 pins
  - Functions available via rear I/O J2 connector

## Configuration & Options

### Standard Configurations

Article No.	CPU Type	System RAM / FRAM	SSD	Front I/O	Rear I/O	FPGA	Front Panel	Op. Temp.	Cooling
02F050C00	MPC8548, 1.33 GHz	512 MB ECC / 128 KB	2GB	1 USB client	4 USB / 2 ETH / 2 SATA / 14 GPIO / 4 UARTs	Yes	9 HP	-40..+85°C	Conduction
02F050P00	MPC8548, 1.33 GHz	512 MB ECC / 128 KB	2GB	2 USB / 2 ETH	4 USB / 2 SATA	No	8 HP	-40..+70°C	Convection

### Options

<b>CPU</b>	<ul style="list-style-type: none"> <li>■ Several PowerQUICC™ III types with different clock frequencies</li> <li>■ MPC8548 or MPC8548E <ul style="list-style-type: none"> <li>□ 1 GHz, 1.2 GHz, 1.33 GHz or 1.5 GHz</li> </ul> </li> <li>■ MPC8543 or MPC8543E <ul style="list-style-type: none"> <li>□ 800 MHz or 1 GHz</li> </ul> </li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>■ System RAM <ul style="list-style-type: none"> <li>□ 512 MB, 1 GB or 2 GB</li> <li>□ With or without ECC</li> </ul> </li> <li>■ Flash Disk <ul style="list-style-type: none"> <li>□ 2 GB, 4 GB, 8 GB or 16 GB</li> <li>□ Please note that the 16 GB Flash disk component only supports a temperature range of 0..+60°C!</li> </ul> </li> <li>■ FRAM <ul style="list-style-type: none"> <li>□ 0 KB or 128 KB</li> </ul> </li> <li>■ Additional SDRAM <ul style="list-style-type: none"> <li>□ 0 MB or 32 MB</li> <li>□ With FPGA</li> </ul> </li> </ul>
<b>I/O</b>	<ul style="list-style-type: none"> <li>■ <a href="#">See interface configuration matrix showing possible I/O combinations (PDF)</a></li> <li>■ Ethernet <ul style="list-style-type: none"> <li>□ Up to three channels at rear</li> <li>□ Only two channels total with MPC8543</li> </ul> </li> <li>■ SATA <ul style="list-style-type: none"> <li>□ Up to two channels at rear</li> </ul> </li> <li>■ Up to 64 user-defined I/O lines <ul style="list-style-type: none"> <li>□ With optional FPGA</li> <li>□ Reduces number of Ethernet/SATA channels</li> </ul> </li> </ul>
<b>Cooling concept</b>	<ul style="list-style-type: none"> <li>■ <a href="#">Convection cooled variety F50P also available, for up to -40..+85°C</a></li> </ul>

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

## Ordering Information

Standard F50C Models	02F050C00	MPC8548, 1.33 GHz, 2 GB SSD Flash, 512 MB DDR2 RAM, 2 MB SRAM, 128 KB FRAM, FPGA, rear I/O (2 GbE, 4 USB, 2 SATA, 14 GPIO, 4 UARTs), 9 HP, -40..+85°C Tcase screened - conduction cooled board within CCA frame
Related Hardware	02F050P00	MPC8548, 1.33 GHz, 2 GB SSD Flash, 512 MB DDR2 RAM, 2 MB SRAM, 128 KB FRAM, front I/O and PICMG 2.30 rear I/O (2 SATA, 4 USB), 8 HP, no FPGA, -40..+70°C screened
Systems & Card Cages	0701-0054	CompactPCI® rack for 3U cards in CCA frames, 3 slots, incl. wide-range PSU 24VDC, -40..+70°C(+85°C) qualified (Tx), IP65
Software: Linux	This product is designed to work under Linux. See below for all available separate software packages.  10EM09-91      General Linux BSP for A17, EM9, EM9A, EK9, F50C, F50P and XM50	
Software: VxWorks®	This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.  10EM09-60      VxWorks® 6.4/6.5 BSP (MEN) for A17, EK9, EM9, EM9A, F50C, F50P and XM50  10EM09-61      VxWorks® 6.9 BSP (MEN) for A17, EK9, EM9, EM9A, F50C, F50P and XM50  13Z017-06      MDISS low-level driver sources (MEN) for 16Z034_GPIO, 16Z037_GPIO and 16Z127_GPIO  13Z025-60      VxWorks® native driver (MEN) for 16Z025_UART, 16Z057_UART and 16Z125_UART	
Software: INTEGRITY®	This product is designed to work under the INTEGRITY® RTOS from Green Hills® Software. An INTEGRITY® Board Support Package for this board is provided by Green Hills® Software. For more information and product support please contact <a href="http://www.ghs.com">Green Hills® Software (www.ghs.com)</a> .	
Software: Firmware/BIOS	<a href="#">MENMON</a> is MEN's firmware/BIOS for PowerPC® platforms.  14XM50-00      MENMON (Firmware) for XM50, F50C and F50P (object code)	
Software: Miscellaneous	A Windows® USB2UART driver from FTDI is available for XM50, XM51 and F50P/F50C Windows® hosts.  <a href="#">More info &amp; downloads</a>	
For operating systems not mentioned here <a href="#">contact MEN sales</a> .		
Documentation	Compare Chart 3U CompactPCI® / PlusIO CPU cards » <a href="#">Download</a>  Compare Chart 3U CompactPCI® / PlusIO peripheral cards » <a href="#">Download</a>  20F050C00      F50C User Manual  20SYST016      3U CompactPCI® CCA Rack User Manual  22Z125-ER      16Z125_UART Errata	

## Contact Information

---

### Germany

MEN Mikro Elektronik GmbH  
Neuwieder Straße 3-7  
90411 Nuremberg  
Phone +49-911-99 33 5-0  
Fax +49-911-99 33 5-901

[info@men.de](mailto:info@men.de)  
[www.men.de](http://www.men.de)

### France

MEN Mikro Elektronik SAS  
18, rue René Cassin  
ZA de la Châtelaine  
74240 Gaillard  
Phone +33 (0) 450-955-312  
Fax +33 (0) 450-955-211

[info@men-france.fr](mailto:info@men-france.fr)  
[www.men-france.fr](http://www.men-france.fr)

### USA

MEN Micro Inc.  
860 Penllyn Blue Bell Pike  
Blue Bell, PA 19422  
Phone (215) 542-9575  
Fax (215) 542-9577

[sales@menmicro.com](mailto:sales@menmicro.com)  
[www.menmicro.com](http://www.menmicro.com)

*The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.*

*MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.*

*MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.*

*The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.*

*In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.*

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.