


NEW

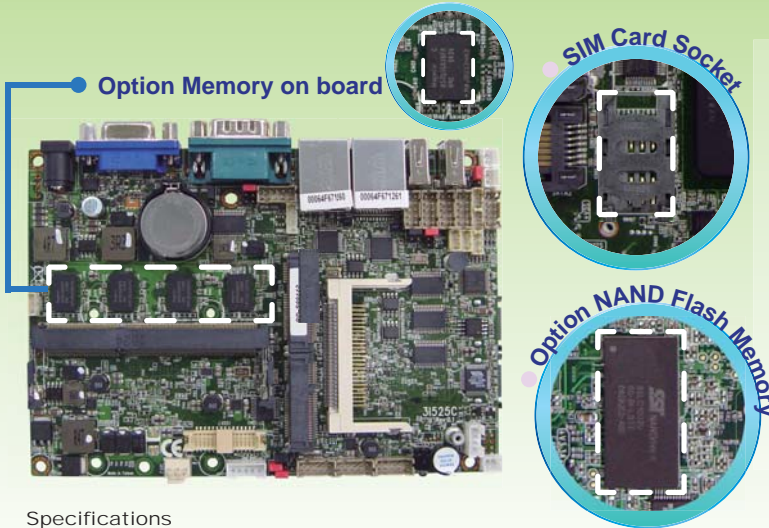

31525CW Series

Application

Embedded Car PC / POS / ATM / NVR / Kiosk / Panel PC application


Features




Specifications

. CPU Type	Intel Atom D525 1.8 GHz (Dual core processor)
. MB Chipset	Intel Atom D525 + ICH8M (82801 HBM)
. BIOS	Award BIOS
. Graphics	Intel Luna Pier Refresh Pineview-D Integrated Graphics Engine
. LVDS	Data format of 18 bits
. System Memory	1 x DDR3 SO-DIMM socket (max. 4GB) or On board DDR3 SDRAM 1GB and 1 x DDR3 SO-DIMM
. NAND Flash Memory	CF Card Type 2 socket for ATA interface On board SSD 2 / 4 / 8 GBytes (option)
. SATA	2 x SATA ports
. Audio	Intel HD Audio Specification Rev. 1.0 Compliant. Support Line-out / Mic-in / Line-in
. LAN	2 x Realtek RTL8111DL or 2 x Intel 82583V / 82574L 10 / 100 / 1000 Mbps
. IO Function	5 x RS232 or 485 (option) + 1 x RS422 / 485 or 232 (option) Support PS/2 keyboard & mouse
. USB	7 x USB 2.0 (2 external + 5 internal)
. Audio Amplifier (option)	Two channels Audio Amplifier 6-W / CH Into an 8-Ω Load from a 12-V Supply Up to 92% Efficient, Class-D operation Differential Input minimizes Common-Mode noise
. Touch Screen	USB interface Touch screen controller Support 4- , 5- , 8- wire Analog Resistive Touch screen USB 1.1 full speed sample rate maximum of 300 point / sec. Resolution : 2048 x 2048
. DIO & WDT	Hardware digital Input & Output, 8 x DI / 8 x DO Hardware Watch Dog Timer, 0~255 sec programmable
. Expansion Interface	1 x Mini PCI socket, 3G SIM card socket 2 x PCIe mini card for PCIe & USB interface
. Power	On board DC +12V ± 5% convert to +3.3V / +5V / +12V for system or Wide range DC-IN from +6V to +35V (option)
. Dimension	145 x 102 mm (3.5 inch)
. Operation Temp.	0 ~ 60 °C
. Operation Humidity	5~95% @ 60 °C, non-condensing

Dimension

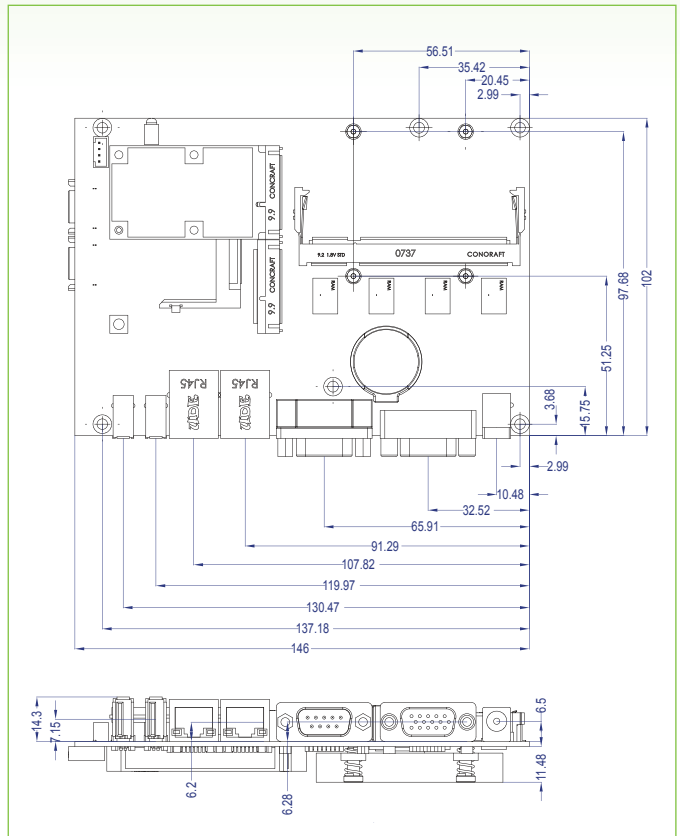

Back Panel

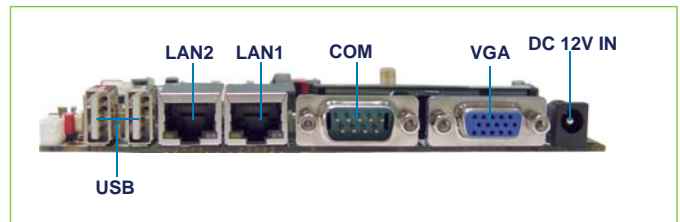

Ordering Information

- . 31525C-RH13-00 2 Realtek GbE, 1GB DDR3 on board & DDR3 SO-DIMM socket, LVDS, DC-IN +12V
- . 31525C-R000-00 2 Realtek GbE, DDR3 SO-DIMM socket, LVDS, DC-IN +12V
- . 31525C-U000-00 2 Intel GbE, DDR3 SO-DIMM socket, LVDS, DC-IN +12V

Testing environment

Model name: 31525C-RH13-00
CPU: Intel Atom D525 1.8 GHz
Chipset: Intel Atom D525 + ICH8M
OS: WIN XP
Testing Program: 3D Mark 2001

Fanless solution with CF card		Fanless solution with 2.5" HDD	
Chassis Temperature	Slim Panel PC	Chassis Temperature	Slim Panel PC
0°C	Pass	0°C	Pass
25°C	Pass	25°C	Pass
45°C	Pass	45°C	Pass
50°C	Pass		

Please upgrade the hard drive to industrial grade for better temperature performance.

Car PC

Networking

POS / Automation

DVR

Digital Signage

Embedded System

Panel PC