



# Now...!

It's time to bring your presentation to life and let it captivate your audience.

## Samsung Digital Presenter **SDP-950DXA/STA**

- 1/3" progressive scan CCD (850,000 pixels)
- Vivid Live Images with 20fps Real Time Motion
- Faster Data Transfer with USB 2.0 PC Interface
- Various External Output Supports -1 DVI & 2 VGA Support
- Convenient Digital Functions :  
image split, shift, image freeze & rotate,  
3x3 screen display and 8 pictures store
- Powerful 36X Magnification. (12X Optical & 3X Digital)
- Easy to Use GUI & Mouse-Controlled Annotation
- Compact & Light weight Design






SPECIFICATION	DESCRIPTION	SDP-950DXA	SDP-950STA	
Optical system	Lens	F=1.5(Wide) ~ 2.1(Tele) f=5.2~66.5, 12x power zoom		
	Shooting Area	Max : 299 x 244mm, Min : 21 x 16mm		
	Zoom	Powered (12x), Digital (3X)		
	Focus	Powered (Auto Focus / Manual)		
Illumination system	Iris	Auto (with fine level adjustment)		
	Upper	Attached to the side arm of the main unit		
	Lower	Light box (built-in main unit)		
Video	Pick-up Device / Effective pixel	1/3" 850,000 pixels PS CCD / 1034(H) x 779(V)		
	Frame rate	20 frame/sec		
	Sync system	Internal sync.		
	VGA output	1024 x 768(XGA) RGB color		
	Video output	C-Video VBS 1.0Vp-p / 75Ω (unbalance)		
		S-Video Y : 1.0Vp-p / 75Ω (unbalance) C : 0.286Vp-p / 75Ω (unbalance)		
	White Balance	Manual / Auto (one touch type)		
	Negative / Positive	Selectable		
	Freeze	built-in		
	Input terminals	VGA : 2		
	Output terminals	VIDEO : 1, VGA : 2, USB : 1, DVI : 1, RS-232C : 1, S-Video : 1, C-Video: 1		
	NTSC / PAL	Selectable		
	Remote controller	Supplied		
	GUI(Graphic User Interface)	Supplied		
	Input selection	3 channels (Internal : 1, External: 2)		
	On-screen display	Available		
	Image freeze	Available		
	Image save	Available (8 frames)	Unavailable	
	Image recall	Available (8 frames)	Unavailable	
	Image divide	Available (2/9 divide)	Unavailable	
Image rotation	Available (90°, 180°, 270°)	Unavailable		
Image transfer to computer	Available (USB : QUAR, HALF, FULL, SCREEN FULL)			
Preset function	Up to 4 user settings			
PC connection	USB	USB 1.1 / 2.0		
	RS-232C	SET control		
	Application software	Viewer software: Windows 98 or higher / Mac OS 10.2 or higher TWAIN Driver for Windows AVI Capture software for Windows		
General	Operating temperature/Humidity	+5°C ~ +35°C, 30% ~ 90%		
	Power	DC12V (Adaptor INPUT: AC100V~240V Free Voltage, 50/60Hz, OUTPUT: 12V, 4.0A)		
	Dimensions	In-use : 650(W) x 566(H) x 407(D)mm / Storage : 477(W) x 154(H) x 407(D)mm		
	Weight	4.8 kg		
	Accessories	Suitcase (SDP-950DXA Only), Remote controller, Cables, etc.		

### Rear Panel



### Dimension

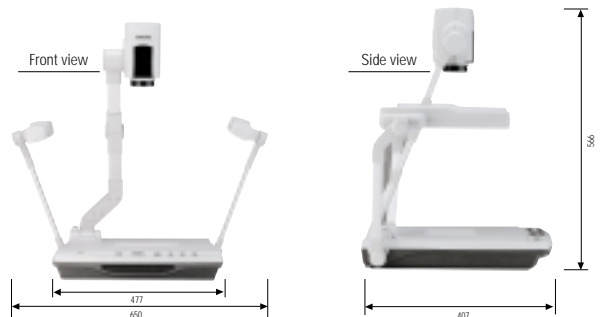

### Option



**BAG-950**  
deluxe carrying case  
(Included for SDP-950DXA)

[www.samsungpresenter.com](http://www.samsungpresenter.com)

Design and specifications are subject to change without notice.



■ DISTRIBUTED BY



**SAMSUNG TECHWIN CO., LTD.**  
145-3, Sangdaewon 1-dong, Jungwon-gu,  
Seongnam-si, Gyeonggi-do 462-703, Korea  
Tel : +82-31-740-8137 ~ 8141 Fax : +82-31-740-8145

**SAMSUNG OPTO-ELECTRONICS AMERICA, INC.**  
ELECTRONIC IMAGING DIV.  
40 Seaview Drive, Secaucus, NJ 07094, U.S.A  
Tel : +1-201-902-0347 Fax : +1-201-902-0429

**SAMSUNG TECHWIN MOSCOW OFFICE**  
Korp 14, 37-A, PR-KT, Leningradsky,  
Moscow 125167, Russia  
Tel : +7-95-258-9296, 9298 Fax : +7-95-258-9297

**SAMSUNG OPTO-ELECTRONICS UK, LTD.**  
Samsung House, 1000 Hillswood Drive,  
Hillswood Business Park Chertsey, Surrey KT16 OPS  
Tel : +44-1932-45-5308 Fax : +44-1932-45-5325

**TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.**  
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R China  
Tel : +86-22-2761-4724(33821) Fax : +86-22-2761-6514