


SHARP

PN-V602
LCD MONITOR

SHARP QUALITY AND BRILLIANCE— FOR UTTERLY SENSATIONAL SIGNAGE

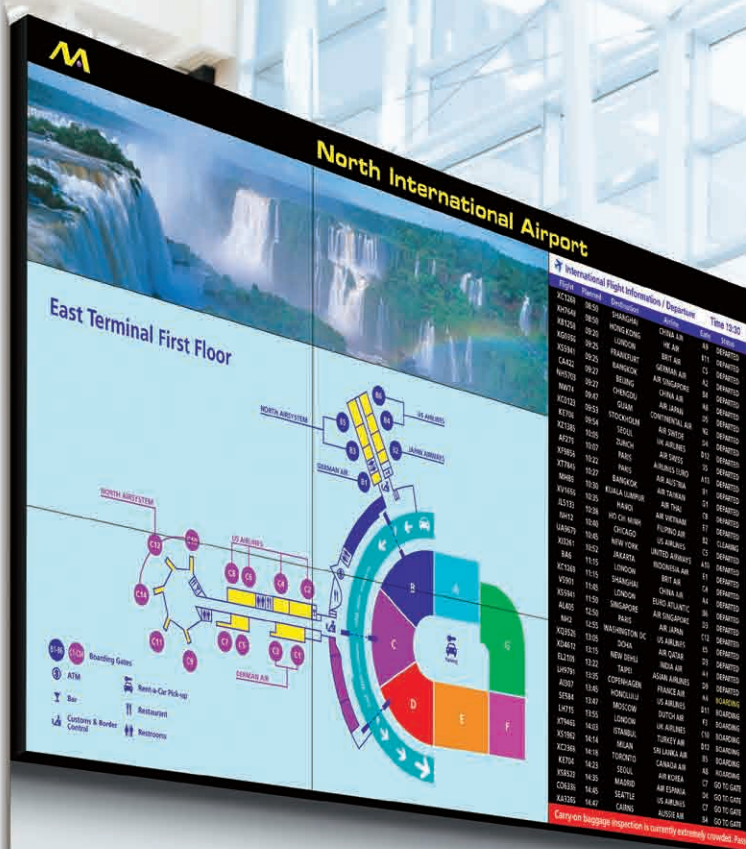

Introducing the PN-V602 professional LCD monitor with super-high 1,500 cd/m² brightness and extraordinary image quality—the brilliant way to bring dazzling results to indoor multi-monitor configurations. The PN-V602 also boasts streamlined bezels, making it the ideal monitor for nearly seamless, high-impact video walls. No wonder the cutting-edge PN-V602 is such a shining example of digital signage potential.

Note: The PN-V602 is intended for use in indoor environments. If the monitor is installed in a location exposed to excessive direct sunlight such as a windowfront, consult your installer to determine if additional measures to reduce ultraviolet and infrared radiation and ambient temperature are required.

High Brightness, High Visibility

Ultra-high brightness of **1,500 cd/m²** lets the PN-V602 excel in brightly lit indoor locations, even those awash in sunlight. And high contrast makes images clearly visible from a distance, so the PN-V602 can be installed in places where the LCD monitor is well out of reach—but not view—of the targeted audience. Indoor sports facilities, transportation hubs, shopping centres, and event venues are just some of the many settings where the PN-V602 can give vivid display to superb-quality images, 24 hours a day, seven days a week.

High Contrast and Superb Energy Efficiency

The PN-V602 owes much of its outstanding black levels, amazing contrast, and superb energy efficiency to **local dimming** of the LED backlight. Local dimming allows specific groups of LEDs to be independently dimmed for greater control of the brightness and darkness in different areas of the monitor. And since black-area LEDs can be turned off, local dimming can considerably reduce power consumption. That's why the PN-V602 delivers significantly better contrast and brightness than conventional LCD monitors while using remarkably less power!



Power Consumption Comparison*

1,500 cd/m² Local dimming: OFF	500W
1,500 cd/m² Local dimming: HIGH	270W
(ref) 700cd/m² Local dimming: HIGH	155W


* Results of Sharp measurements when displaying broadcast content (sub-clause 11.6) stipulated under IEC 62087 Ed. 2.0 and with brightness set to maximum. Note that the power consumption reduction will vary depending on the images displayed.

Breathtaking Image Quality

The PN-V602's exceptional image quality comes from Sharp's own industry-leading LCD technologies. Sharp **UV²A**** technology, incorporated into the 60-inch LCD panel, ensures highly efficient use of light from the backlight and prevents light leakage for the display of truly bright whites, amazingly vivid colours, and extremely deep blacks. And Sharp's **full-array LED backlight**, sporting LED elements evenly positioned across the entire panel, gives PN-V602 images remarkably uniform brightness.

Ultra-Slim Bezel for Dynamic Video Walls

The PN-V602 boasts an ultra-slim bezel that makes the lines between neighbouring monitors an almost seamless 6.5 mm*1 wide (2.4 mm right and bottom, 4.1 mm left and top)*2. This enables the high-impact display of large, crisp images that catch the eye and capture the attention. In multi-monitor configurations, optional **Mirror Frames** can minimise*3 the lines between PN-V602 monitors by reflecting mirror images from the display content, creating more dynamic video walls and an even smoother big-picture effect.

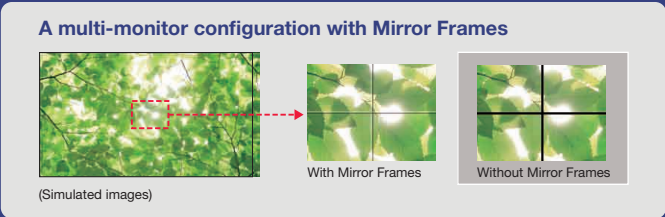

*1: Does not include the gap between the monitors. *2: Non-display area for neighbouring monitors is 7.1 mm. *3: Visibility of the seams between monitors will vary depending on such factors as the on-screen images and the viewing angle. *4: UV²A stands for "Ultraviolet-induced Multi-domain Vertical Alignment," a photo-alignment technology that ensures uniform alignment of liquid crystal molecules in a certain direction.

Specifications (tentative)

Model Name	PN-V602	Video Colour System	NTSC (3.58 MHz, 4.43 MHz)*2 / PAL / PAL60 / SECAM
Installation	Landscape / Portrait	Input Terminals*3	Standard PC analogue: Mini D-sub 15-pin x 1*4, HDMI (1080p compatible) x 1*5, 3.5 mm-diameter mini stereo jack x 1, Video*4*6, Component video*4*6, RS-232C: D-sub 9-pin x 1, Control Kit jack x 1
LCD Panel	60-inch widescreen (152.4 cm diagonal), UV²A LCD	Via Optional PN-ZB02 Board	PC digital: DVI-D 24-pin (HDCP compatible) x 1, PC analogue: BNC x 1, Video: BNC x 1*6, S-Video x 1, Component video: BNC (Y, Cb/Pb, Cr/Pr) x 1*6, Audio: RCA pin (L/R) x 2
	Max. Resolution	Output Terminals*3	Standard Audio: RCA pin (L/R) x 1, RS-232C: D-sub 9-pin x 1
	Max. Display Colours (approx.)	Via Optional PN-ZB02 Board	PC digital: DVI-D 24-pin x 1, External speaker: 10W + 10W (6 Ω)
	Pixel Pitch (H x V)	Input/Output Terminals*3	Via Optional PN-ZB02 Board LAN port (10Base-T/100Base-TX)
	Max. Brightness*1	Mounting	VESA (6 points), 200 mm (7 7/8") pitch, M6 screw or VESA (4 points), 200 mm (7 7/8") pitch, M6 screw
	Contrast Ratio	Power Supply	100V ~ 240V AC, 50/60 Hz
	Viewing Angle (H/V)	Power Consumption	510W
	Active Screen Area (W x H)	Environmental Conditions	Operating Temperature 0°C to 40°C
	Response Time	Operating Humidity	20% to 80% RH (no condensation)
Computer Input	Video	Dimensions (W x D x H) (approx.)	1,335.9 x 149.3 x 754.2 mm (52 5/8" x 5 7/8" x 29 11/16") (Display section only, not including protrusions)
	Synchronisation	Weight (not including PN-ZB02) (approx.)	44 kg (97 lbs)
	Plug & Play		
	Power Management		

*1 Brightness will depend on input mode and other picture settings. Brightness level will decrease over time. Due to the nature of the equipment, it is not possible to precisely maintain a constant level of brightness. *2 Requires separately sold PN-ZB02 Interface Expansion Board. *3 Use a commercially available connection cable for PC and other video connections. *4 The mini D-sub 15-pin terminal can be used for PC analogue, video, or component video, all of which are selectable from the menu. When used with a video or component video source, a commercially available conversion cable is required. *5 For both PC and AV components. *6 When the PN-V602 is equipped with the optional PN-ZB02 board, either the LCD monitor's standard-equipped video and component terminals or the PN-ZB02's video and component terminals can be selected for use from the menu.

Input/Output Terminals (standard)

PN-ZB02 Interface Expansion Board (option)

Other Options

- PN-ZR01 : Control Kit (remote controller and remote control sensor box)
- PN-ZR32 : Long Mirror Frame
- PN-ZR33 : Short Mirror Frame

Design and specifications are subject to change without prior notice.

Distributed by:

