



21260D Series

Intel® Atom™ N2600 2.5" SBC

Onboard DDR3,VGA,HDMI,


3 x Gb Ethernet, 2 x Mini PCIe, 6 x USB, 2 COM

Features

- Embedded Intel® Atom™ Dual Core processor N2600+Intel NM10
- Onboard 2GB DDR3
- Display: VGA & HDMI
- 3 x Realtek GbE LAN, 6 x USB 2.0, 2 x COM
- 2 x Mini PCIe (full size & half size)
One full size PCIe Mini card for PCIe by or USB interface
One half size PCIe Mini card for mSATA or USB interface

Back Panel

21260D-H26-00 Rear I/O

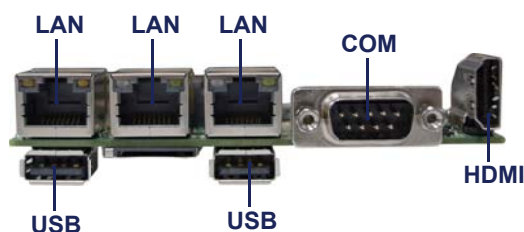

Specification:

MODEL	21260D-H26
CPU Type	Intel Cedarview-M N2600 1.6GHz (Dual core processor) TDP 3.5W
MB Chipset	Intel Cedarview-M and NM10
BIOS	Award BIOS
Graphics	Intel Cedarview-M Integrated Graphics chipset,N2600 400 MHz render clock frequency Support Directx* 10.1 compliant Pixel Shader* v2.0 and OGL 3.0, Display Ports: HDMI or CRT
System Memory	On board DDR3 SDRAM 2GB, N2600 Memory DDR3 data transfer rate of 800MT/s
NAND flash memory	On board SSD 2/4/8/16/32/64 GBytes (option)
SATA	One SATA port with independent DMA operation supported mSATA share with mini PCIe (option)
HDMI	1 x HDMI support resolution up to 1920 x 1200
Audio	Intel High Definition Audio Specification, Support Line-out/Line-in/Mic-in (Optional/ internal)
LAN	3 x Realtek RTL8111F 10 / 100 / 1000 Mbps
IO Function	1 x RS232 or 422/485(external) optional with VGA port ,1 x RS232 or 422/485 (internal)
USB	6 x USB 2.0 (2 external + 4 internal)
DIO & WDT	Hardware digital Input & Output, 4 x DI / 4 x DO (Option) Hardware Watch Dog Timer, 0~255 sec programmable (Option)
Expansion Interface	One 3G SIM card socket (option)
Power	On board DC +12V
Dimension	102 x 73 mm (2.5 inch)
Operation Temperature	0 ~ 60 °C
Operation Humidity	5 ~ 95%, non-condensing