


XV-Z30000




Optional Accessories

3D Glasses




AN-3DG10-S (silver)

Lamp




AN-K30LP

Cable




AN-C3CP2  
3-RCA to 15-pin D-sub cable (10' (3 m))


Ceiling Mounts



AN-TK201  
For high ceiling installation



AN-TK202  
For standard ceiling installation




AN-60KT  
Installation adaptor

Note: Some of the optional accessories may not be available depending on the region. Please check with your nearest Sharp authorized projector dealer or service center.

Screen Size and Projection Distance

When using a wide screen (16:9): In case of displaying the 16:9 picture on the whole of the 16:9 screen

Side View




Picture size			Projection distance [L]		Distance from the lens center to the bottom of the image		Distance from the lens center to the center of the image
Diag.	Width (cm)	Height (cm)	Minimum [L1]	Maximum [L2]	Lower	Upper	
500"	436" (1107)	245" (623)	51'7" (15.7m)	103'11" (31.7m)	-245 7/16" (-623cm)	0" (0cm)	±82 7/16" (±210cm)
400"	349" (886)	196" (498)	41'4" (12.6m)	83'2" (25.3m)	-196 7/16" (-498cm)	0" (0cm)	±66 7/16" (±168cm)
300"	261" (664)	147" (374)	31'0" (9.4m)	62'4" (19.0m)	-147 7/16" (-374cm)	0" (0cm)	±49 9/16" (±126cm)
200"	174" (443)	98" (249)	20'8" (6.3m)	41'7" (12.7m)	-98 1/16" (-249cm)	0" (0cm)	±33 1/16" (±84cm)
100"	87" (221)	49" (125)	10'4" (3.1m)	20'9" (6.3m)	-49 1/16" (-125cm)	0" (0cm)	±16 9/16" (±42cm)
60"	52" (133)	29" (75)	6'2" (1.9m)	12'6" (3.8m)	-29 7/16" (-75cm)	0" (0cm)	±9 15/16" (±25cm)
40"	35" (89)	20" (50)	4'2" (1.3m)	8'4" (2.5m)	-19 7/16" (-50cm)	0" (0cm)	±6 3/16" (±17cm)

Effective Distance of 3D Glasses

The 3D Glasses can receive infrared signals sent from the IR emitter within the range indicated in the diagram.

Operating range (Distance from the IR emitter):

Approx. 33 ft (10 m)



Specifications


Models		XV-Z30000
Display device		0.65" DLP® chip x 1
Resolution		1080P (1,920 x 1,080)
Brightness		1,600 lumens (in High Brightness Mode)
Contrast ratio		50,000:1 (in High Contrast Mode)
Lens	F-number	F 2.5 to 3.7
	Zoom	Power, x2.0 (f=21.2 to 42.0 mm)
	Focus	Power
Picture size		40" (102 cm) to 500" (1,270 cm)
Projection distance		40": 1.3 to 2.5 m, 100": 3.1 to 6.3 m, 500": 15.7 to 31.7 m
Input signals	Computer RGB	WSXGA+, SXGA+, SXGA, WXGA, XGA, SVGA, VGA
		Mac 21", 19", 16", 13"
Input terminals	DTV	1080P, 180i, 720P, 576P, 576i, 540P, 480P, 480i
	HDMI	x 2 (version 1.4a, 3D over HDMI, CEC supported)
	Computer/Component (mini D-sub 15-pin)	x1
Output terminals	Component (3 RCA)	x1
	Trigger	x1 (power jack DC 12V output)
	3D Synchro	x1
Control terminals	LAN (RJ-45)	x1
	RX-232C (D-sub 9-pin)	x1
Horizontal frequency		15 to 110 kHz
Vertical frequency		43 to 85 Hz
Fan noise		22 dB (Eco+Quiet Mode on)
Projection lamp		250 W
Rated voltage		AC100 to 240 V
Rated frequency		50/60 Hz
Input current		3.5 A
Power consumption (Standby with Economy Mode on)		348 W (0.3 W) with AC 100 V/328 W (0.7 W) with AC 240 V
Operation temperature		41°F to 95°F (5°C to 35°C)
Dimensions (main body only) W x H x D		15 8/16" x 4 39/64" x 16" (405 x 114.5 x 406.5 mm)
Weight (approx.)		16.1 lbs. (7.3 kg)
Supplied accessories		Remote control, two R6 (AA) batteries, power cord (6' (1.8 m)), 3D active shutter glasses (2 pairs), infrared emitter, infrared emitter cable (10 m), operation manual, CD-ROM

Design and specifications are current as of March 2012, but are subject to change without notice. • DLP®, the DLP logo are trademarks or registered trademarks of Texas Instruments. • HDMI, the HDMI logo and High Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC. • All company and product names are trademarks or registered trademarks of their respective manufacturers. Sharp makes no warranties or representations of any kind with respect to these products. • Brightness values indicate overall average values of the product at the time of shipment and are stated based on ISO 21118-2005.



SHARP CORPORATION OSAKA, JAPAN

Dimensions

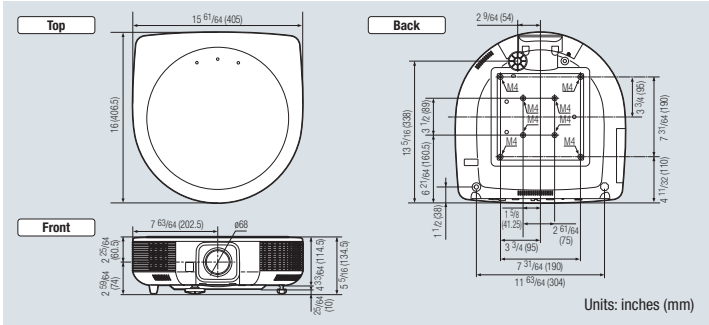

3D Signal Compatibility

Format	Signal	Horizontal frequency [kHz]	Vertical frequency [Hz]	Analog Support	Digital Support
Frame Packing	720P	75.0	50		✓
	720P	90.0	60		✓
	1080P	54.0	24		✓
	720P	37.5	50		✓
Side By Side	720P	45.0	60		✓
	1080i	28.1	50		✓
	1080i	33.8	60		✓
	1080P	56.3	50		✓
	1080P	67.5	60		✓
	720P	37.5	50		✓
Top And Bottom	720P	45.0	60		✓
	1080P	27.0	24		✓
	1080P	56.3	50		✓
	1080P	67.5	60		✓

- Precautions on Viewing Stereoscopic 3D**
- The sense of three-dimensionality may vary between individuals.
  - Viewing stereoscopic 3D may cause discomfort or eye strain.
  - For protection of proper eye development, children should avoid viewing stereoscopic 3D.
  - Avoid viewing stereoscopic 3D if you have a pre-existing oversensitivity to light, sleep disorder, heart disease, or are pregnant, in poor health, feeling unwell, or inebriated.
  - Read the operation manual carefully to ensure viewing stereoscopic 3D with safety and comfort.
  - View 3D images at an appropriate distance. (Recommended distance: 3 x Effective picture height. Example: Approx. 12.3 ft (3.8 m) for 100-inch 16:9 picture)



XV-Z30000  
High-definition DLP® Home Theater Projector



Turn Your Home into a 3D Home Movie Theater  
with This Incredible Full 1080p HD 3D Projector






# Simply Set Up the XV-Z30000 and Watch Beautiful Theater-quality 3D Pictures at Home.


## Beautiful 3D Images

**Sharp's Unique ICs and IDT® Reon™ VX**  
The XV-Z30000 is equipped with Sharp's proprietary digital image ICs for 3D projection and the IDT® Reon™ VX, which incorporates various image processing algorithms for high-quality display of wide-ranging video sources for use in DLP. With these ICs and DLP, the XV-Z30000 achieves the high-quality natural and detailed expression of movie film ambience not only for 2D pictures but also 3D pictures.

**Sharp's Unique Dual ICs for High-Quality 3D Pictures**  
With dual ICs, the XV-Z30000 provides broad compatibility for 3D formats\*, including the mandatory formats specified by the HDMI standard and others. Plus, 3D depth adjustment and algorithms to reduce crosstalk and flicker deliver pleasant, stress-free viewing conditions  
\* Refer to the back page for details on compatible 3D formats.



Picture with crosstalk      Picture without crosstalk



**Reon VX Video Processor – High-Quality Video Technology from IDT**  
The Reon VX uses true four-field, motion-adaptive 1080i de-interlacing to provide the highest quality 1080p image. In addition, the advanced HQV scaling, noise reduction and detail enhancement engines ensure that SD images are converted and delivered at a quality approaching HD.

**Sharp's Proprietary 3D Glasses and Infrared Emitter**  
The two pairs of 3D glasses that come with the XV-Z30000 are also compatible with AQUOS LCD TVs. With these glasses, you can enjoy 3D on AQUOS for normal viewing or on a larger screen with the XV-Z30000. The 3D glasses provide 2D/3D switching, and so viewers can return to 2D and continue watching content to avoid any fatigue from viewing 3D, particularly when watching with family and friends who are unaccustomed to 3D.

Also, the infrared emitter for the XV-Z30000 is separate rather than built in, and the 3D glasses directly receive infrared signals. This results in a wider 3D viewing range with greater freedom


\* Refer to the back page for details on the effective distance of the 3D glasses.

**HDMI 1.4a for Blu-ray 3D Compatibility**  
The XV-Z30000 is equipped with two inputs compatible with HDMI 1.4a to simultaneously connect to a 3D-compatible Blu-ray player, still camera or video camera to view 3D content.


## Flexible Installation

**Center Lens Design for Easy Installation**  
The lens is in the center of the projector, which makes it easy to install in a fixed position, such as for ceiling mounting, to project onto a screen.

**Powered Lens Shift Expands Installation Possibilities**  
Picture projection positions can be easily adjusted using powered lens shift with the remote control.

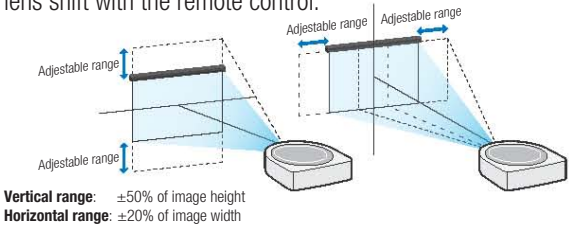

**2x Power Zoom**  
Set the XV-Z30000 in any desired position according to the room size and other conditions.

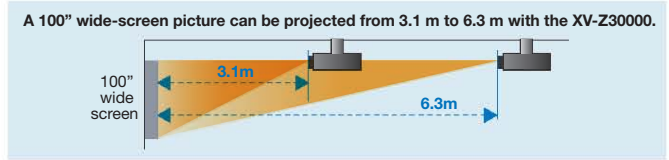

**Projection Resizing for Anamorphic Lenses**  
A CinemaScope picture size (2.35:1) can be viewed using anamorphic lenses.




## High-Quality Picture

**Full HD Panel (1,920 x 1,080 pixels)**  
The XV-Z30000 provides Full HD high-resolution pictures with 1,920 x 1,080 pixels and greater capability for large-screen pictures to prevent rough, grainy colours. And, the panel is compatible with next-generation digital broadcast systems.


**1,600-Lumen High Brightness**  
Incorporating Sharp optoelectronics technology, the XV-Z30000 provides 1,600-lumen brightness in high-brightness mode to enjoy large-screen pictures.

**Picture Mode**  
The XV-Z30000 is equipped with nine present picture modes, and the custom gamma function enables users to make colour preference settings in this mode.

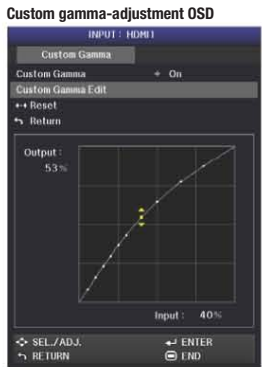


Selectable items	Description
Standard	View standard images.
Movie 1	View movies with many bright scenes.
Movie 2	View movies with many dark scenes.
Monochrome	View black-and-white movies.
Animated movies	View anime or animated movies.
Sports	View sports and other images with fast-moving objects.
Stage	View live performances.
Dynamic	Make images vivid.
Game	Use this mode when the audio and image are not synched or when you want to create a sharper image.
User 1, 2	Customize the picture mode settings as desired.


**50,000:1 Dynamic Contrast Ratio with Dual-Iris Mechanism**  
Employing a thoroughly developed optical engine with Dual-Iris Mechanism, the XV-Z30000 enhances fine, detailed differences between the darkest and brightest colours and provides superior black level reproduction. The mechanism features independent irises for adjusting illuminating conditions and projecting images. Also, the remote control can be used to select from four contrast modes.

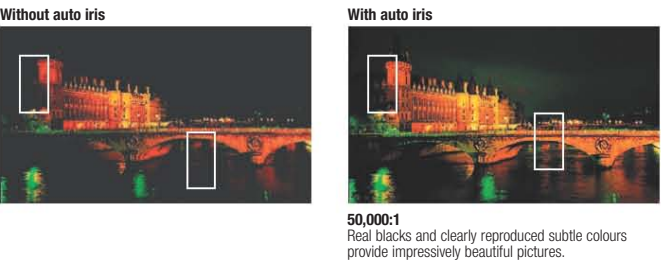

**Dual-Iris Mechanism**

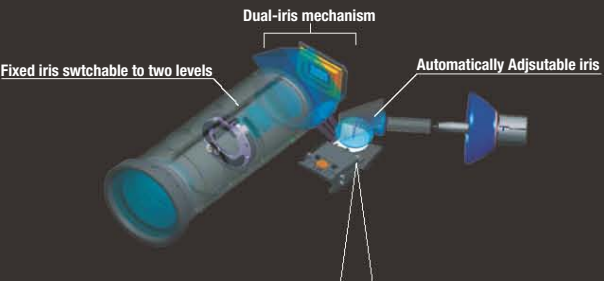

**Sharp's Unique Dynamic Iris with Fly-eye Design**  
The holes on the iris are a unique Sharp design. These holes provide auto correction of the white balance while the iris is moving and create excellent colour reproduction.



## Various Control Function

**System Control Supported**  
The XV-Z30000 supports control commands using LAN/RS-232C. Projector on/off switching and input switching can be controlled by using by operation pad that controls room lighting conditions and opening and closing of curtains.

**CEC (Consumer Electronics Control) Function\***

- The XV-Z30000 can be linked with other video devices and controlled using HDMI. Operating multiple devices is not required.
- One-Touch Play: The XV-Z30000 automatically turns on when you press the Play button on a video device connected with an HDMI cable.
- System Standby: The video device automatically turns off when you turn the XV-Z30000 off.

\* The XV-Z30000 is CEC compatible with Sharp video products.

**Trigger Terminal to Activate Powered Screen and Anamorphic Lens**  
A trigger terminal linked to the power switch activates a powered screen and anamorphic lens.