

# OV-713

## 70" SXGA DLP™ projection module



Barco's OV-D2 series integrates cutting edge DLP™ technology into 70" video wall systems that are designed and optimized for use in a 24/7 mission critical environment. The Barco designed projection engine provides a set of unique features, resulting in an unrivaled DLP™ rear projection system with outstanding picture quality, reliability and ease of use.

### **Superior display quality**

- Latest high contrast DLP™ technology
- Brightness, contrast, and large viewing angles tailored to the human eye providing maximum readability
- Vibrant colors
- Sense<sup>6</sup> technology providing consistently excellent video wall uniformity over time

### **Reliability and lifetime serviceability**

- Engineered for ease of maintenance and serviceability
- Durable components with high reliability from lamp to screen
- Dual redundant lamp offering 100% reliability
- Easy lamp replacement from the rear of the system while system runs
- 100% sealed off optical engine, preventing dust contamination
- Fast Ethernet communication allowing redundant projection access for direct control and configuration
- Barco's Lamp-Lease Program allowing to efficiently control operational costs

### **Flexibility**

- Designed to form video walls of any size, in a linear or curved setup
- Requires minimal installation depth
- Innovative modular concept for easier build up and design

### **Integrated system**

- Barco Wall Control Manager software with central graphical overview of the video wall
- Integrating individual projection modules into a single display

**BARCO**

Visibly yours

## Features of the OV-713 projection modules

### Sense<sup>6</sup>

Sense<sup>6</sup> brings wall uniformity to a next level.

Not only does Sense<sup>6</sup> increase color and brightness uniformity in the corners of each single projection module, Barco's innovative Sense<sup>6</sup> technology also keeps all projection modules equal over time and across the entire video wall.

By integrating a patented brightness and color sensor, the video wall's color and brightness is continuously measured and communicated between projection modules. Sense<sup>6</sup> automatically matches the brightness of full white, full black and all gray levels in between, as well as the colors of all projection modules. The I-lamp recalibrates the color sensor for long-time stability.

Sense<sup>6</sup> operates unnoticed in the background and requires no operator intervention whatsoever. For instance, Sense<sup>6</sup> will work during automatic lamp change without special operator actions. The intended video wall content remains unchanged at all times. No special screen calibration patterns are needed.




70" OV-713		HVA	HVM	HVX
	<b>Power</b>	<b>Luminance (cd/m<sup>2</sup>   fL) (¹)</b>		
<b>120 W</b>	140   41	275   81	680   200	
<b>132 W</b>	150   44	305   90	750   221	
<b>180 W</b>	165   49	n.a.	n.a.	
<b>Seam size screen mullion</b>	0 mm			
<b>interscreen gap</b>	< 0.2 mm by patented stitch concept			
	< 1.5 mm for optimal modular screen (²)			
<b>Humidity conditions</b>	Up to 90% non condensing (²)			
<b>Temperature conditions</b>	12°C-32°C   53.6°F-89.6°F (²)			
<b>Storing conditions</b>	0°C-40°C   32°F-105°F			

(¹) @ 6500 K, values are approx 50% @ 3200 K

(²) Depending on wall configuration


(³) @ 25°C, 50% RH

Screens	Screen type	Brightness	Viewing angle	Full viewing angle	Half gain angle (h.v.)	1/5 gain angle (h.v.)
	HVA	Normal	Excellent	180°	±35°   ±35°	~ ±65°   ±65°
	HVM	Medium	Wide	180°	±35°   ±27°	~ ±45°   ±41°
	HVX	High	Medium	160°	±35°   ±10°	~ ±45°   ±17°

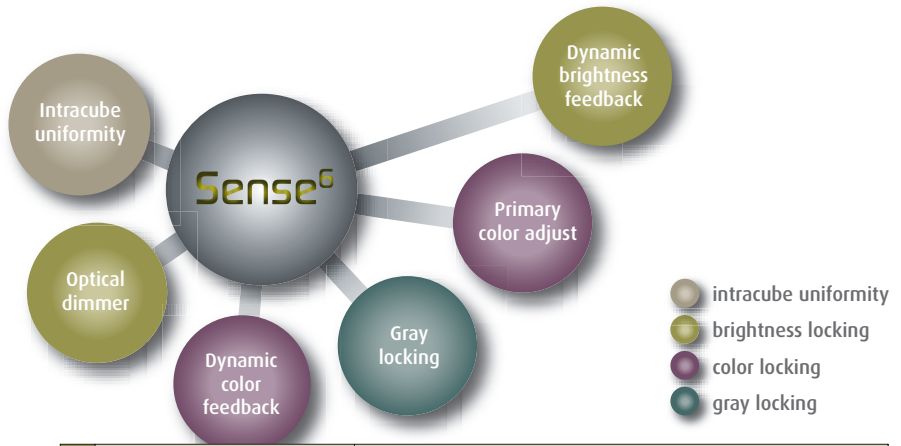

$\Delta E^*$  is a parameter which incorporates color and brightness differences into one unit. Additionally,  $\Delta E^*$  takes into account the adaptation level of the human eye to brightness and color.

Sense <sup>6</sup> (Optional)	
<b>Color shift between projection modules over time</b>	Shift in $\Delta E^*$ over time < 3 (with color lock)
<b>On-screen brightness uniformity</b>	Very high brightness and color uniformity
ANSI 9 brightness min.	97%
ANSI 13 brightness typ.	95%
<b>Projector color/brightness uniformity</b>	
$\Delta E^*$ intercube typ.	< 6
$\Delta E^*$ intracube typ.	< 3
<b>Brightness locking</b>	Makes brightness of all projection modules equal at all times without operator intervention
	High Dynamic Range (HDR) by optical dimming preserves contrast, independent of brightness level or lamp life
	Active dynamic brightness sensor feedback technology measures brightness and serves as input to the optical dimmer
<b>Color locking</b>	Makes color of all projection modules equal at all times without operator intervention
	Primary Color Adjust is a color algorithm that adjusts color to a common color target in red, green, blue and white
	Active dynamic color sensor feedback technology collects color information from all projection modules. The True Color Sensor measures the complete spectrum rather than just red, green and blue and is based upon the standard spectral function according to CIE 1931
<b>Gray locking</b>	Makes gray levels equal across projection modules

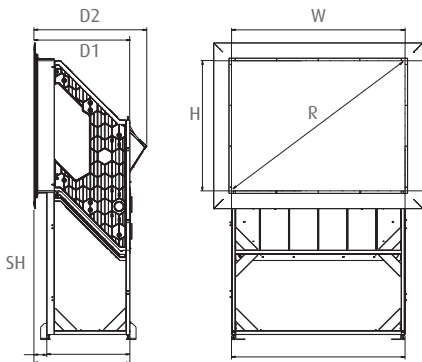

Dimensions	
<b>OV-713</b>	
<b>Width W</b>	1400 mm   55.1"
<b>Height H</b>	1120 mm   44.1"
<b>Diagonal R</b>	70" nominal
<b>D1</b>	837.5 mm   34.4"
<b>Full depth D2</b>	973 mm   38.3"
<b>Aspect ratio</b>	5:4
<b>Standard height SH</b>	875 mm, 1000 mm, 1200 mm   34.5", 39.4", 47.2"
<b>Min screen height SH</b>	570 mm ± 30 mm   22.4"
<b>Weight/module</b>	108.5 kg   239 lbs

# Technical specifications OV-713

Display capabilities	<b>Resolution</b>	SXGA 1280 x 1024 TruePixel			
	<b>Absolute resolution</b>	23 dpi			
	<b>Luminous flux @ 6500 K @ 132 W</b>	875			
	<b>Dynamic contrast</b>	5100:1			
	<b>Color</b>	100% EBU			
	<b>White point</b>	6500 K, natural lighting (¹)			
	Imaging device	<b>DMD chip</b>	0.95" LVDS ±12° DarkChip3, BrilliantColor™		
<b>Pixel accuracy</b>		PixelTrue display, shows each pixel true to the input pixels without scaling or smoothing effects			
<b>MTBF of DMD</b>		typ. 650,000 hours			
<b>Lifetime of DMD</b>		typ. > 100,000 hours			
<b>Image retention</b>		No image retention or burn-in			
Lamps		<b>Lamps</b>	Choice between 120 W, 132 W and 180 W		
		<b>Lamp life (²)</b>	120 W	132 W	180 W
		10,000 hrs	6,000 hrs	6,000 hrs	
	<b>Lamp redundancy</b>	Cold standby or hot standby with redundant power supply Automatic lamp switch by autosensing lamp failure			
	<b>Lamp replacement</b>	Defect lamp can be hot-swapped without image loss			
	<b>Lamp switch</b>	Dynamic feedback of brightness and color readjusts video wall to equal performance			
	<b>Switching time</b>	< 1.5 seconds			
	<b>I-lamp</b>	Intelligent lamp carries a.o. lamp life information & spectrum			
	Color wheel	<b>Color wheel, rotation speed &amp; lifetime</b>	Color wheel cartridge with MTTR < 5 minutes		
			3x speed for better image representation		
		Air bearing with rating of 50,000 hours			

Power	<b>AC input voltage</b>	100-240 VAC, 60-50 Hz			
	<b>Power (W)</b>	120 W	132 W	180 W	
	Cold standby	< 250	< 275	< 335	
	Hot standby	< 390	< 430	< 550	
	<b>Heat dissipation (BTU/h)</b>	120 W	132 W	180 W	
Signal	Cold standby	< 850	< 900	< 1145	
	Hot standby	< 1325	< 1375	< 1875	
	<b>Signal input/output</b>	1 x DVI-D in/out, 1 x Dual-link DVI-D in/out			
	<b>Pixel clock</b>	162 MHz   270 MHz (³)			
	<b>Input frequency</b>	Multi sync 30-75 Hz			
	<b>Genlock range</b>	Genlock in 49-61 Hz range			
	<b>Supported input resolutions</b>	VGA, SVGA, XGA, SXGA, SXGA+, UXGA, 1080p, dual XGA, triple XGA (³), quad XGA (³), dual SXGA+(³)			
	<b>Cropping</b>	Possible			
	<b>Scaling (optional)</b>	Up- and down scaling			
	Communications	<b>Barco Wall Control Manager</b>	Graphical representation of video wall on operator PC		
			Integrates separate projection modules into a single display, allowing a.o. Sense6		
			Client – server architecture provides central video wall logic with multiple access from multiple sites		
			Health status in the blink of an eye and support for trouble shooting		
			Configuration of different settings		
			Wall control by the operator		
		Multiple access levels			
<b>Direct ethernet access</b>		Projection module settings and control through standard ethernet browser			
		Easy and fast firmware upgrade over ethernet			
<b>Autodiagnosics</b>		Projector self test			
<b>Integration to third party equipment</b>	External video wall control from different devices through SOAP based API				

(¹) Special 3200 K option for backdrop • (²) Lamp manufacturer specs @ IEC 61947-1 test conditions  
(³) On second input

Ref. no. R599166SSE1008R004

Barco is an ISO 9001 registered company. The information and data given are typical for the equipment described. However any individual item is subject to change without any notice. The latest version of this product sheet can be found on [www.barco.com](http://www.barco.com)  
DLP™ Technology by Texas Instruments offers crystal clear images with superior quality. DLP, Brilliant Color are trademarks of Texas Instruments.



Contact Barco  
Europe, Middle-East, Africa: +32 56 26 20 09  
USA: +1 678 475 8000  
Latin America: +55 11 38421656  
Japan: +81 3 5762 8727  
China: +86 400 88 22726  
[sales.security\\_and\\_monitoring@barco.com](mailto:sales.security_and_monitoring@barco.com)

**BARCO**

Visibly yours