

NM10 – Unmanaged 8-Port Rugged Industrial Ethernet Switch

- **Unmanaged 8-port rugged Ethernet switch**
- **Fast or Gb BASE-T Ethernet via M12 connectors on the front panel**
- **PoE+ Power Sourcing Equipment (PSE), up to 60 W output power**
- **Rugged aluminium enclosure with IP40 protection**
- **Fanless and maintenance-free design**
- **Ultra wide range power supply input (14.4 to 154 VDC) with interruption class S2**
- **-40°C to +85°C operating temperature**
- **LED indicators on the front panel**
- **Compliant to EN 50155 (railways)**
- **Compliant to ISO 7637-2 (E-mark for automotive)**



The NM10 family is a range of fanless and maintenance-free Ethernet switches, which have been specifically designed for use in rolling stock and automotive applications operating in extremely rugged environmental conditions.


The NM10 range of switches provide eight channels at the front panel, accessible through M12 connectors, and cover different application requirements including with or without Power over Ethernet (PoE), and either 100 Mb or 1 Gb Ethernet interfaces.

The voltage supply for the NM10 Ethernet Switch is designed for maximum flexibility and supports wide range input supply voltages from 14.4 to 154 VDC, and meets all EN 50155 requirements for voltages ranging from 24 to 110 VDC. It is also fully compliant to the ISO 7637-2 (E-mark for automotive) standard.

The NM10 Ethernet Switch is designed for fanless operation at temperatures ranging from -40 to +70°C. Its special aluminium housing has ingress protection IP40 and cooling fins which serve as a heatsink for the internal electronics, and in this way provides conduction cooling.

As a member of MEN's family of extremely rugged industrial box PCs, the NM10 provides the same flexibility and scalability, as well as a look and feel which is common to the family.

Diagram

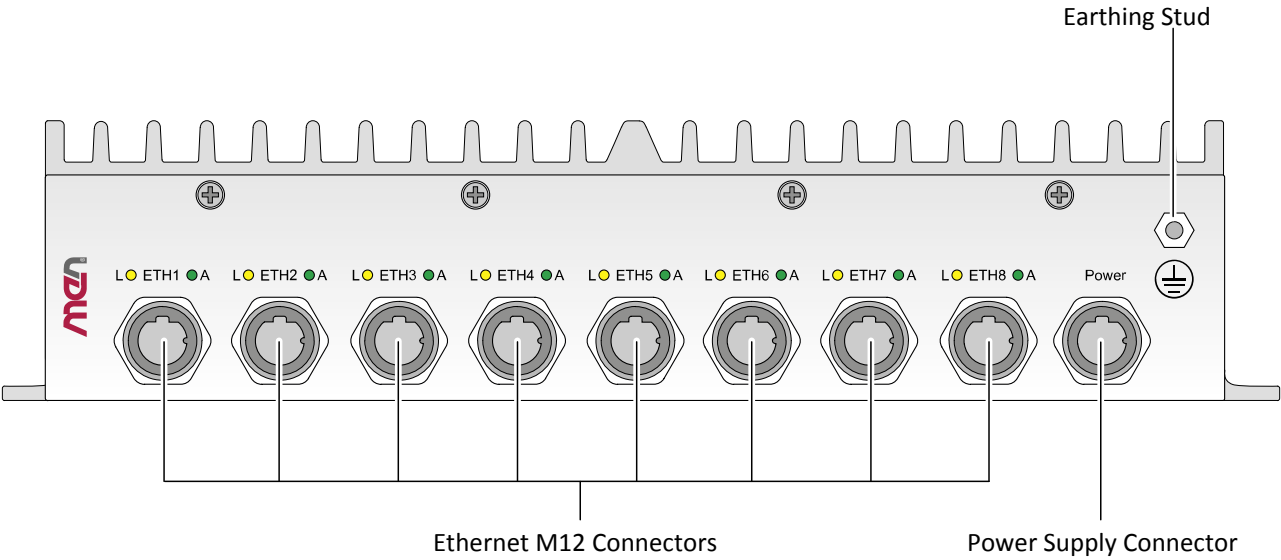

Technical Data

Supported Port Types	<ul style="list-style-type: none"> ■ The following configurations are available: <ul style="list-style-type: none"> □ 8x 10/100BASE-T unmanaged switch (Model: 09NM10-00) □ 8x 10/100BASE-T unmanaged switch, 8x PoE + PSE with max. 60 W output power (Model: 09NM10-01) □ 8x 10/100/1000BASE-T unmanaged switch (Model: 09NM10-02) □ 8x 10/100/1000BASE-T unmanaged switch, 8x PoE + PSE with max. 60 W output power (Model: 09NM10-03)
Protocols and Functionality	<ul style="list-style-type: none"> ■ Throughput <ul style="list-style-type: none"> □ Dual-speed 10/100 Mbit/s unmanaged switch (Models: 09NM10-00 and 09NM10-01) □ Tri-speed 10/100/1000 Mbit/s unmanaged switch (Models: 09NM10-02 and 09NM10-03) ■ MAC tables <ul style="list-style-type: none"> □ 8192 MAC addresses ■ Processing <ul style="list-style-type: none"> □ Store-and-Forward ■ Energy Efficient Ethernet (IEEE 802.3az) on all ports ■ VLAN <ul style="list-style-type: none"> □ 4096 VLANs (IEEE 802.1q) ■ Flow Control <ul style="list-style-type: none"> □ IEEE 802.3x supported
Power Over Ethernet Features	<ul style="list-style-type: none"> ■ Power over Ethernet functions on all ports (Models: 09NM10-01 and 09NM10-03) <ul style="list-style-type: none"> □ PSE (Power Sourcing Equipment) function □ Up to 60 W total output power □ PoE starts in auto mode
Front Interfaces	<ul style="list-style-type: none"> ■ Ethernet <ul style="list-style-type: none"> □ Eight M12 connectors, 100BASE-T (100 Mbit/s) (Models: 09NM10-00 and 09NM10-01), or □ Eight M12 connectors, 1000BASE-T (1 Gbit/s) (Models: 09NM10-02 and 09NM10-03) ■ Ethernet LED ■ Power supply <ul style="list-style-type: none"> □ One M12 connector for ultra wide range power ■ Power status LED <ul style="list-style-type: none"> □ Indicates power supply stability or range validity
Electrical Specifications	<ul style="list-style-type: none"> ■ Supply voltage <ul style="list-style-type: none"> □ 14.4 VDC to 154 VDC □ Nominal voltages 24, 36, 48, 72, 96 and 110 VDC, according to EN 50155 □ Power interruption class S2 (10 ms) □ Code H, Starting Profile Level II (50ms @ min 8V), according to ISO 16750 ■ Power consumption <ul style="list-style-type: none"> □ +10 W Max. (Models: 09NM10-00 and 09NM10-02) □ +85 W Max. with 60W PoE Max. (Models: 09NM10-01 and 09NM10-03)
Mechanical Specifications	<ul style="list-style-type: none"> ■ Dimensions: Height 44.1 mm x Width 220 mm x Length 164 mm ■ Weight: Less than 1.5 kg (depending on configuration)

Technical Data

Environmental Specifications	<ul style="list-style-type: none"> ■ IP protection <ul style="list-style-type: none"> □ IP40 (except front plate) □ Front plate: IP30 □ Up to IP65 (Option) ■ Temperature range (operation) <ul style="list-style-type: none"> □ -40°C to 70°C (screened), with up to 85°C for 10 minutes according to class Tx (EN 50155) □ Fanless operation ■ Temperature range (storage): -40°C to +85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300 m to +3000 m ■ Shock: 50 m/s², 30 ms (EN 61373) ■ Vibration (function): 1 m/s², 5 Hz to 150 Hz (EN 61373) ■ Vibration (lifetime): 7.9 m/s², 5 Hz to 150 Hz (EN 61373) ■ Conformal coating of internal components
Reliability	<ul style="list-style-type: none"> ■ MTBF: tbd h @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	<ul style="list-style-type: none"> ■ Flammability <ul style="list-style-type: none"> □ UL 94V-0 ■ Fire Protection <ul style="list-style-type: none"> □ EN 45545-2 ■ Electrical Safety <ul style="list-style-type: none"> □ EN 60950-1, class I equipment
EMC Conformity (Automotive)	<ul style="list-style-type: none"> ■ ECE R10 (prepared for E-Mark) ■ ISO 16750-H-K-D-C-C-IP30 (On request)
EMC Conformity (Railway)	<ul style="list-style-type: none"> ■ EN 50121-3-2
Software Support	<ul style="list-style-type: none"> ■ Firmware for configuration and management included

Configuration & Options

Standard Configurations

Article No.	Housing	Input Voltage	Ethernet Connectors	PoE
09NM10-00	Aluminium with IP40 protection	14.4 to 154 VDC, 24 to 110 VDC nom.	8 x 10/100BASE-T	No
09NM10-01	Aluminium with IP40 protection	14.4 to 154 VDC, 24 to 110 VDC nom.	8 x 10/100BASE-T	Yes
09NM10-02	Aluminium with IP40 protection	14.4 to 154 VDC, 24 to 110 VDC nom.	8 x 10/100/1000BASE-T	No
09NM10-03	Aluminium with IP40 protection	14.4 to 154 VDC, 24 to 110 VDC nom.	8 x 10/100/1000BASE-T	Yes

Ordering Information

Standard NM10 Models	09NM10-00	Unmanaged 8-port 10/100 MBit Ethernet switch, no PoE, 14.4 to 154 VDC, EN 50155 class Tx compliant -40 to +70°C (screened), conformal coating
	09NM10-01	Unmanaged 8-port 10/100 MBit Ethernet switch, with PoE, 14.4 to 154 VDC, EN 50155 class Tx compliant -40 to +70°C (screened), conformal coating
	09NM10-02	Unmanaged 8-port 10/100/1000 MBit Ethernet switch, no PoE, 14.4 to 154 VDC, EN 50155 class Tx compliant -40 to +70°C (screened), conformal coating
	09NM10-03	Unmanaged 8-port 10/100/1000 MBit Ethernet switch, with PoE, 14.4 to 154 VDC, EN 50155 class Tx compliant -40 to +70°C (screened), conformal coating

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SAS
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.
860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.