



DISplayer² SD
Content Presentation

dzine

 **DISplayer² SD**

Secure and rugged player

The DISplayer² SD is a secure and rugged player including passive cooling. All industrial components have a long lifetime and spare parts are long time available.

These benefits make the player more reliable and faster, the operating system is stored on the solid state drive.

Developed for 24/7 applications

The DISplayer² SD has been developed for 24/7 applications. The Real Time Operating System is not Windows based so there's no risk for hacking or viruses.

Compatible with almost any type of display

The DISplayer² SD is compatible with almost any type of display. Large, small or almost any brand of display can be connected to the DISplayer² SD.


Compatible with most popular media/content formats

The secured and rugged player is also compatible with most popular media/content format like flash, jpegs, gifs, png etc. so animated content can be showed.

Specifications*

Processor & Chipset	Intel® Celeron® M 1.86 Ghz Processor Intel® 945GME
Memory & Storage	1 GB DDRII 533 MHz memory 2 GB Compact Flash™ 160 GB SATA 2,5" HDD
Communication	2x Ethernet 10/100/1000 baseT on RJ45 1x Audio line-in / line-out 1x RS232 1x RS485 4x USB 2.0 S-Video/CVBS -in RF- in (optional) WiFi (optional) BlueTooth (optional)
Output	DVI-I Resolution up to 2048 x 1536
Content Playback	Video clips, text, flash animations, text tickers, images, PowerPoints, etc.
Power	230 V AC - 40 Watt
Operating Temp.	32°F~140°F (0°C~60°C)
Software	Real-time operating system (proprietary OS) GT2 player software Compatible with dZine DISplay Studio

Dimensions*

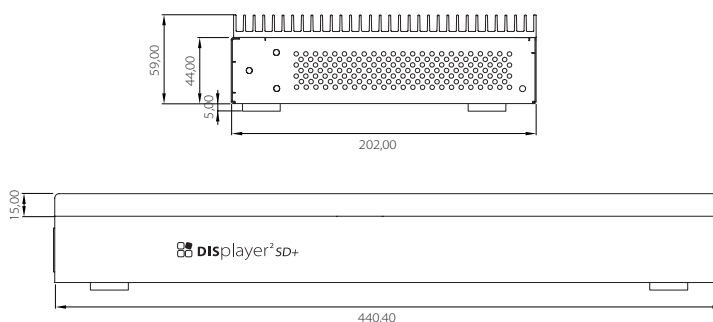

* Preliminary specifications are subject to change without any notice.

Distributed by:

dzine

't hoge 49
8500 Kortrijk(Belgium)

[t]: +32 (0)56 24 90 90
[f]: +32 (0)56 24 90 99

info@dzine.be
<http://www.dzine.be>