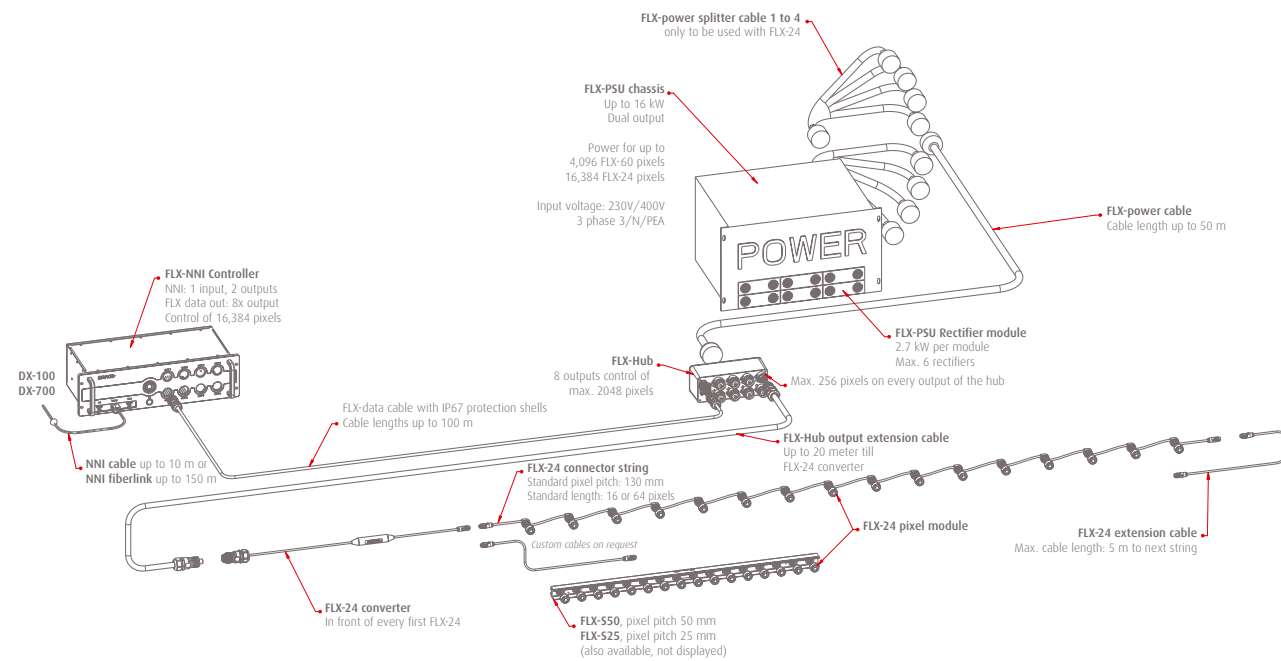
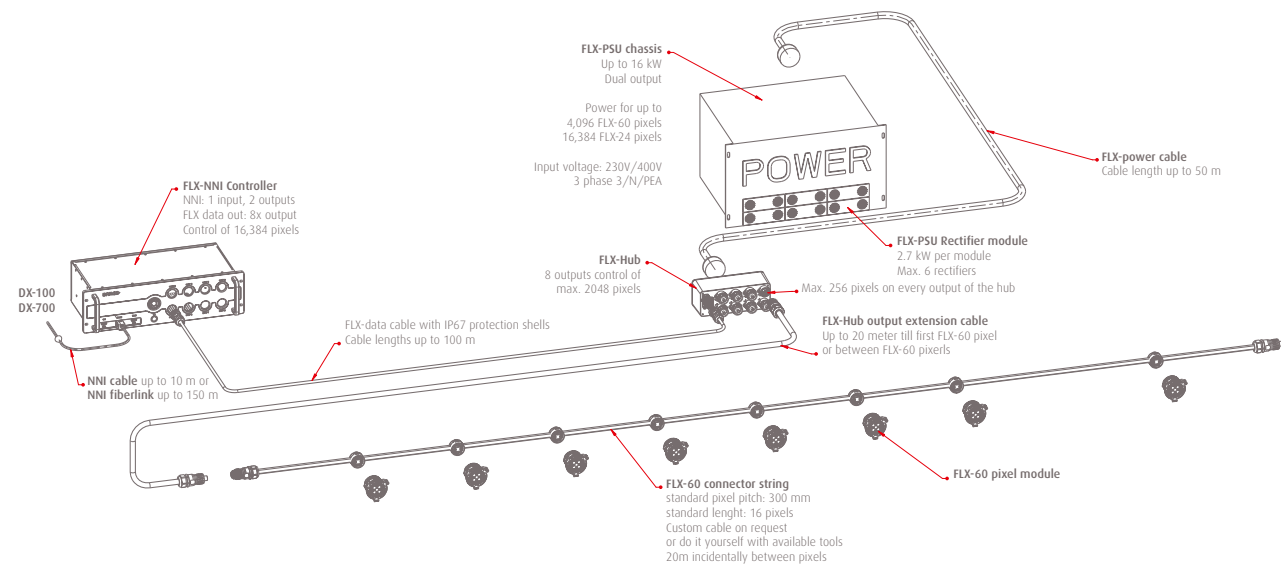


FLX-24 configuration



FLX-60 configuration



Barco Creative LED

Unlimited creative LED options for rental and fixed installations



Barco offers an endless portfolio of creative LED solutions suited for a wide variety of markets, both rental and fixed installations.

From outdoor installations for concerts or corporate branding to smaller indoor LED solutions for corporate foyers, fashion shows or car shows, Barco has the right LED equipment to turn your design into reality.

R5990155 July 2009

The information and data given are typical for the equipment described. However any individual item is subject to change without any notice. The latest version of this overview sheet can be found on www.barco.com.

Barco nv

Noordlaan 5, 8520 Kurne, Belgium
T +32 56 36 80 47 - F +32 56 36 83 86
email: sales.events@barco.com

11101 Trade Center Drive,
Rancho Cordova, CA 95670, USA
T +1 916 859 2500 - F +1 916 859 2515



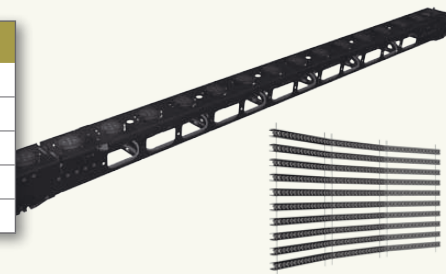
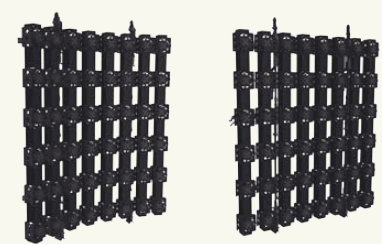
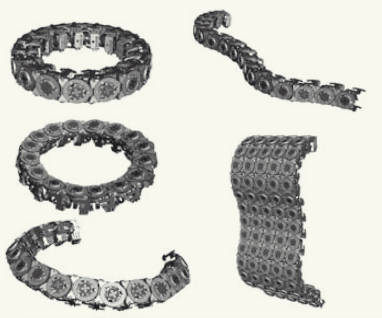



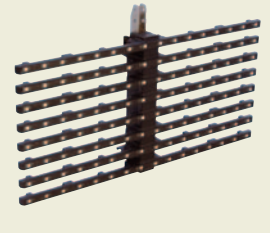





BARCO

Visibly yours

www.barco.com

BARCO

Visibly yours

	PIXEL	TILE	STRIP	FLEXIBLE TILE	FLEXIBLE STRIP																																																												
LARGE PITCH 50 mm	 <table border="1"> <thead> <tr> <th colspan="2">FLX-60</th> </tr> </thead> <tbody> <tr> <td>LED type</td> <td>3-in-1 SMD</td> </tr> <tr> <td>Brightness</td> <td>15.000 mcd</td> </tr> <tr> <td>Viewing angle</td> <td>140°</td> </tr> <tr> <td>Diameter x Height</td> <td>60 mm x 60 mm</td> </tr> <tr> <td>Protection rating</td> <td>IP66</td> </tr> </tbody> </table>	FLX-60		LED type	3-in-1 SMD	Brightness	15.000 mcd	Viewing angle	140°	Diameter x Height	60 mm x 60 mm	Protection rating	IP66	 <table border="1"> <thead> <tr> <th colspan="2">FLX-P100</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>100 - 200 mm</td> </tr> <tr> <td>N° of pixels</td> <td>max. 64 (8x8)</td> </tr> <tr> <td>Access</td> <td>front and rear</td> </tr> <tr> <td>Tile size</td> <td>800 mm x 800 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-P100		Pixel pitch	100 - 200 mm	N° of pixels	max. 64 (8x8)	Access	front and rear	Tile size	800 mm x 800 mm	Outdoor use	yes	 <table border="1"> <thead> <tr> <th colspan="2">FLX-S100</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>100 mm</td> </tr> <tr> <td>N° of pixels</td> <td>max. 64 (8x8)</td> </tr> <tr> <td>Access</td> <td>front and rear</td> </tr> <tr> <td>Strip size</td> <td>80 x 100 x 1600 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-S100		Pixel pitch	100 mm	N° of pixels	max. 64 (8x8)	Access	front and rear	Strip size	80 x 100 x 1600 mm	Outdoor use	yes	 <table border="1"> <thead> <tr> <th colspan="2">FLX-C150</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>94 - 150 mm</td> </tr> <tr> <td>N° of pixels</td> <td>5x6 or 8x6 config.</td> </tr> <tr> <td>Flexibility</td> <td>convex - concave</td> </tr> <tr> <td>Panel size</td> <td>750 mm x 900 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-C150		Pixel pitch	94 - 150 mm	N° of pixels	5x6 or 8x6 config.	Flexibility	convex - concave	Panel size	750 mm x 900 mm	Outdoor use	yes	 <table border="1"> <thead> <tr> <th colspan="2">FLX-N-100</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>100 mm</td> </tr> <tr> <td>N° of pixels</td> <td>16</td> </tr> <tr> <td>Flexibility</td> <td>various positions/two axis</td> </tr> <tr> <td>Strip size</td> <td>100 x 100 x 1600 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-N-100		Pixel pitch	100 mm	N° of pixels	16	Flexibility	various positions/two axis	Strip size	100 x 100 x 1600 mm	Outdoor use	yes
FLX-60																																																																	
LED type	3-in-1 SMD																																																																
Brightness	15.000 mcd																																																																
Viewing angle	140°																																																																
Diameter x Height	60 mm x 60 mm																																																																
Protection rating	IP66																																																																
FLX-P100																																																																	
Pixel pitch	100 - 200 mm																																																																
N° of pixels	max. 64 (8x8)																																																																
Access	front and rear																																																																
Tile size	800 mm x 800 mm																																																																
Outdoor use	yes																																																																
FLX-S100																																																																	
Pixel pitch	100 mm																																																																
N° of pixels	max. 64 (8x8)																																																																
Access	front and rear																																																																
Strip size	80 x 100 x 1600 mm																																																																
Outdoor use	yes																																																																
FLX-C150																																																																	
Pixel pitch	94 - 150 mm																																																																
N° of pixels	5x6 or 8x6 config.																																																																
Flexibility	convex - concave																																																																
Panel size	750 mm x 900 mm																																																																
Outdoor use	yes																																																																
FLX-N-100																																																																	
Pixel pitch	100 mm																																																																
N° of pixels	16																																																																
Flexibility	various positions/two axis																																																																
Strip size	100 x 100 x 1600 mm																																																																
Outdoor use	yes																																																																
MEDIUM PITCH 13 mm	 <table border="1"> <thead> <tr> <th colspan="2">FLX-24</th> </tr> </thead> <tbody> <tr> <td>LED type</td> <td>3-in-1 SMD</td> </tr> <tr> <td>Brightness</td> <td>3.000 mcd</td> </tr> <tr> <td>Viewing angle</td> <td>140°</td> </tr> <tr> <td>Diameter x Height</td> <td>24 mm x 31 mm</td> </tr> <tr> <td>Protection rating</td> <td>IP66</td> </tr> </tbody> </table>	FLX-24		LED type	3-in-1 SMD	Brightness	3.000 mcd	Viewing angle	140°	Diameter x Height	24 mm x 31 mm	Protection rating	IP66	 <table border="1"> <thead> <tr> <th colspan="2">FLX-P50</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>50 - 70 - 100 mm</td> </tr> <tr> <td>N° of pixels</td> <td>max. 256 (16x16)</td> </tr> <tr> <td>Access</td> <td>front and rear</td> </tr> <tr> <td>Tile size</td> <td>800 mm x 800 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-P50		Pixel pitch	50 - 70 - 100 mm	N° of pixels	max. 256 (16x16)	Access	front and rear	Tile size	800 mm x 800 mm	Outdoor use	yes	 <table border="1"> <thead> <tr> <th colspan="2">FLX-P100</th> </tr> </thead> <tbody> <tr> <td>FLX-S50/S25</td> <td>FLX strips fixed on FLX panel frame</td> </tr> </tbody> </table>	FLX-P100		FLX-S50/S25	FLX strips fixed on FLX panel frame	 <table border="1"> <thead> <tr> <th colspan="2">MiTRIX</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>24 mm</td> </tr> <tr> <td>Brightness</td> <td>3,000 nits</td> </tr> <tr> <td>Viewing angle</td> <td>145° x 145°</td> </tr> <tr> <td>Tile size</td> <td>382 mm x 224 mm</td> </tr> <tr> <td>Protection</td> <td>IP65 rated</td> </tr> </tbody> </table>	MiTRIX		Pixel pitch	24 mm	Brightness	3,000 nits	Viewing angle	145° x 145°	Tile size	382 mm x 224 mm	Protection	IP65 rated	 <table border="1"> <thead> <tr> <th colspan="2">FLX-S25 FLX-S50</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>25 mm 50 mm</td> </tr> <tr> <td>N° of pixels</td> <td>32 16</td> </tr> <tr> <td>Size</td> <td>30 x 30 x 800 mm</td> </tr> <tr> <td>Outdoor use</td> <td>yes</td> </tr> </tbody> </table>	FLX-S25 FLX-S50		Pixel pitch	25 mm 50 mm	N° of pixels	32 16	Size	30 x 30 x 800 mm	Outdoor use	yes	 <table border="1"> <thead> <tr> <th colspan="2">FLX-C150</th> </tr> </thead> <tbody> <tr> <td>FLX-S50/S25</td> <td>FLX strips fixed on FLX curtain frame</td> </tr> </tbody> </table>	FLX-C150		FLX-S50/S25	FLX strips fixed on FLX curtain frame					
FLX-24																																																																	
LED type	3-in-1 SMD																																																																
Brightness	3.000 mcd																																																																
Viewing angle	140°																																																																
Diameter x Height	24 mm x 31 mm																																																																
Protection rating	IP66																																																																
FLX-P50																																																																	
Pixel pitch	50 - 70 - 100 mm																																																																
N° of pixels	max. 256 (16x16)																																																																
Access	front and rear																																																																
Tile size	800 mm x 800 mm																																																																
Outdoor use	yes																																																																
FLX-P100																																																																	
FLX-S50/S25	FLX strips fixed on FLX panel frame																																																																
MiTRIX																																																																	
Pixel pitch	24 mm																																																																
Brightness	3,000 nits																																																																
Viewing angle	145° x 145°																																																																
Tile size	382 mm x 224 mm																																																																
Protection	IP65 rated																																																																
FLX-S25 FLX-S50																																																																	
Pixel pitch	25 mm 50 mm																																																																
N° of pixels	32 16																																																																
Size	30 x 30 x 800 mm																																																																
Outdoor use	yes																																																																
FLX-C150																																																																	
FLX-S50/S25	FLX strips fixed on FLX curtain frame																																																																
SMALL PITCH		 <table border="1"> <thead> <tr> <th colspan="2">OLite 612</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>12.4 mm</td> </tr> <tr> <td>Brightness</td> <td>6,000 nits</td> </tr> <tr> <td>N° of pixels</td> <td>3,888 LEDs/tile (72 x 54)</td> </tr> <tr> <td>Tile size</td> <td>896 x 703 x 264 mm (1 tile contains 48 modules)</td> </tr> <tr> <td>Outdoor use</td> <td>yes (IP65 rated)</td> </tr> </tbody> </table>	OLite 612		Pixel pitch	12.4 mm	Brightness	6,000 nits	N° of pixels	3,888 LEDs/tile (72 x 54)	Tile size	896 x 703 x 264 mm (1 tile contains 48 modules)	Outdoor use	yes (IP65 rated)	 <table border="1"> <thead> <tr> <th colspan="2">NX with Creative Mechanics</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>4 mm (NX-4) - 6 mm (NX-6)</td> </tr> <tr> <td>Brightness</td> <td>2,000 nits</td> </tr> <tr> <td>Curve capability</td> <td>0 - 10° convex or concave</td> </tr> <tr> <td>Dimensions</td> <td>145.5 x 1,512 x 114 mm* (for 9 LED modules)</td> </tr> <tr> <td>Outdoor use</td> <td>no</td> </tr> </tbody> </table>	NX with Creative Mechanics		Pixel pitch	4 mm (NX-4) - 6 mm (NX-6)	Brightness	2,000 nits	Curve capability	0 - 10° convex or concave	Dimensions	145.5 x 1,512 x 114 mm* (for 9 LED modules)	Outdoor use	no	 <table border="1"> <thead> <tr> <th colspan="2">MiSTRIP</th> </tr> </thead> <tbody> <tr> <td>Pixel pitch</td> <td>13.25 mm</td> </tr> <tr> <td>Brightness</td> <td>6,100 nits</td> </tr> <tr> <td>Viewing angle</td> <td>145° x 145°</td> </tr> <tr> <td>Strip size</td> <td>371 x 26.5 x 55 mm (short strip) 1,484 x 26.5 x 55 mm (long strip)</td> </tr> <tr> <td>Protection</td> <td>IP65 rated</td> </tr> </tbody> </table>	MiSTRIP		Pixel pitch	13.25 mm	Brightness	6,100 nits	Viewing angle	145° x 145°	Strip size	371 x 26.5 x 55 mm (short strip) 1,484 x 26.5 x 55 mm (long strip)	Protection	IP65 rated																									
OLite 612																																																																	
Pixel pitch	12.4 mm																																																																
Brightness	6,000 nits																																																																
N° of pixels	3,888 LEDs/tile (72 x 54)																																																																
Tile size	896 x 703 x 264 mm (1 tile contains 48 modules)																																																																
Outdoor use	yes (IP65 rated)																																																																
NX with Creative Mechanics																																																																	
Pixel pitch	4 mm (NX-4) - 6 mm (NX-6)																																																																
Brightness	2,000 nits																																																																
Curve capability	0 - 10° convex or concave																																																																
Dimensions	145.5 x 1,512 x 114 mm* (for 9 LED modules)																																																																
Outdoor use	no																																																																
MiSTRIP																																																																	
Pixel pitch	13.25 mm																																																																
Brightness	6,100 nits																																																																
Viewing angle	145° x 145°																																																																
Strip size	371 x 26.5 x 55 mm (short strip) 1,484 x 26.5 x 55 mm (long strip)																																																																
Protection	IP65 rated																																																																