


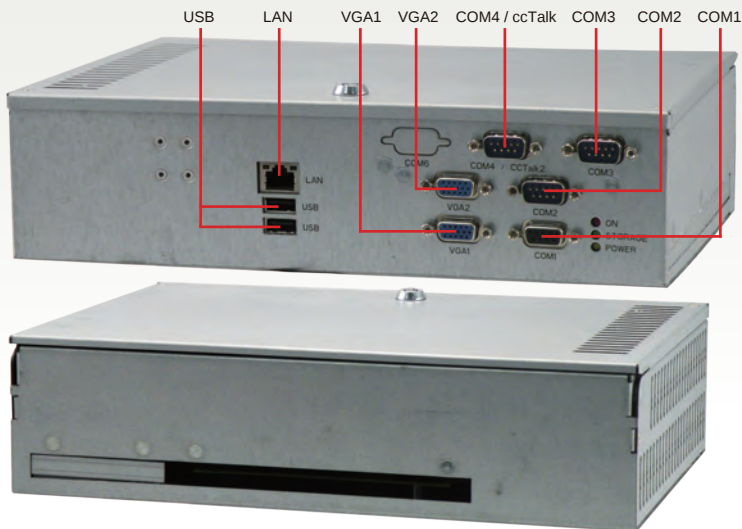

Features

- ✓ 915GME with Pentium M/Celeron M
- ✓ 14-bit Interruptible Digital Input
- ✓ 15-bit High Current Output
- ✓ Italian JAMMA Interface
- ✓ Dual 256KB Battery Backup SRAM with Battery Low Event Logger
- ✓ Dual VGA
- ✓ 4 x 16-bit Interruptible Timer
- ✓ 4-bit Intrusion Logger Input

Specification

System	
CPU	Socket 478 support Intel Pentium M & Celeron M
Chipset	Intel 915GME + ICH6M
Front Side Bus	400/533MHz
Memory	2 x 240-pin DIMM socket support 533/667MHz Dual Channel DDR2 SDRAM up to 2GB, 512MB pre-installed
BIOS	Award
RTC	1 x system RTC and 1x secured RTC
Hardware Monitoring	1. CPU voltage 2. CPU and system temperature 3. System and CPU FAN speed 4. System Fan speed control
WatchDog Timer	Software programmable 1~255 sec.
OS	Windows XP/XP Embedded, Linux
Video	
Video Controller	Intel 915GME integrated GMA 900 graphic controller
Video Interface	2 x VGA port
Audio	
Codec	Stereo
Amplifier	2 x 6 Watts amplifier
Ethernet	
Connector	1 x RJ45
Controller	Intel 82562ET PHY (10/100Mbps)
Storage	
IDE	1 x IDE (40-pin)
SATA	1 x SATA port
SSD	1 x Compact Flash Type II socket (Support UDMA)
DOM	1 x bNAND Angle 1 Type
I/O	
Serial Port	4 x RS-232 (4 x DB9, COM4 selectable for ccTalk)
USB Port	6 x USB2.0 (2 x external, 4 x internal)

Gaming Function	
I/O Interface	Italian JAMMA Interface
Digital Input	14 x optical isolated input
Digital Output	15 x 1000 mA digital output
Timer	4 x 16-bit Interruptible Timer
Readable DIP switch	2 x 8-bit DIP switch
Battery backedup SRAM	2 x 256KB (Optional 2 x 512KB)
EEPROM	1K Bytes
Intrusion Logger	1 x chassis intrusion switch + 3 bits on golden finger
Random Number Generator	16-bit
Security	iButton socket and ProtectU
Mechanical & Environment	
Dimension	278.3mm x 189.8mm x 81.21mm (W x D x H)
Power Requirement	5V and 12V input to golden finger
Indicator	Power LED Storage LED Power_In LED
Operating Temp.	0~50°C (32~122°F)
Storage Temp.	-20~70°C (-4~158°F)
Safety	CE, FCC class A

Packing List	
1. ACE-S5296FL x 1	
2. Software driver CD x 1	
3. Quick user manual x1	
4. Mounting bracket x 2	
5. Screw pack x 1	
Ordering Information	
ACE-S5296FLPM16	ACE-S5296FL with Pentium M 1.6GHz, 512MB DDR2
ACE-S5296FLCM15	ACE-S5296FL with Celeron M 1.5GHz, 512MB DDR2