

NEW

WD385U-EST
XD365U-EST


Ultrashort-throw Projection	Brilliant Color™	Interactive Function	10W Speaker	USB/LAN Display	Remote Desktop
Stand-by Audio	Audio Mix	PC less Presentation	Visual PA	Direct Power Off	Long-life Lamp
Low Stand-by Power	Top Loading Lamp	LAN (RJ-45)	HDMI	Closed Caption	Low Fan Noise

Picture Performance Presentation User-friendly



Input and Output Terminals

(WD385U-EST/XD365U-EST)

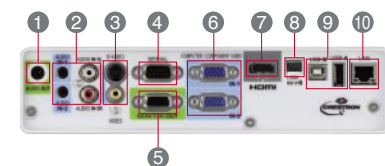

- | | |
|----------------------------|------------------|
| ① Audio output | ⑦ HDMI |
| ② Audio input | ⑧ Mini-USB |
| ③ S-Video/Video | ⑨ USB (type-A/B) |
| ④ Serial RS-232C | ⑩ LAN (RJ-45) |
| ⑤ Monitor output | |
| ⑥ PC/Component video input | |

Specifications

Model	WD385U-EST	XD365U-EST
Display technology	0.65" 1-chip DMD	0.55" 1-chip DMD
Resolution	1280 × 800 (Total 1,024,000 pixels)	1024 × 768 (Total 786,432 pixels)
Brightness	2800lm	2500lm
Contrast ratio	3000 : 1	
Picture size	70" – 180" (1280 × 800)	60" – 150" (1024 × 768)
Throw ratio	0.375	0.469
Source lamp	Normal mode: 230W (Shut-off Time: 3000hr), Low mode: 190W (Shut-off Time: 6000hr)	
Computer compatibility	640 × 480 (Expanded) – 1280 × 800 (Real) – 1600 × 1200 (Compressed), 1080p (Compressed) Sync on Green available	640 × 480 (Expanded) – 1024 × 768 (Real) – 1600 × 1200 (Compressed), 1080p (Compressed) Sync on Green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 component video; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i/p (1125i/p 60Hz) 1080i/p (1125i/p 50Hz)	
Input terminals	RGB; mini D-sub 15pin × 2 Audio; stereo mini jack (φ3.5mm) × 2 (one for PC1, the other for PC2) Video; RCA × 1 + S-VIDEO × 1 Digital; HDMI × 1 Video audio; RCA jack (L/R) × 1	
Output terminals	RGB; mini D-sub 15pin × 1 Audio; stereo mini jack (φ3.5mm) × 1	
Communication terminals	SERIAL; mini D-sub 9pin × 1 (RS232C) LAN (RJ-45); × 1 (projector control, LAN display) USB type-A; wireless display, Computer-free presentation (PC less presentation) USB type-B; USB display	
Audio speaker	10W mono	
Dimensions (W × H × D)	325 × 113 × 258 mm	
Weight	4.1 kg (9.0 lbs)	
Power requirements	100 - 240VAC, 50/60Hz	
Optional lamp	VLT-XD560LP	


• Compliant with ISO21118-2005

Varies depending on conditions:

- Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual.
- HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
- All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Screen Size and Projection Distance

Side view

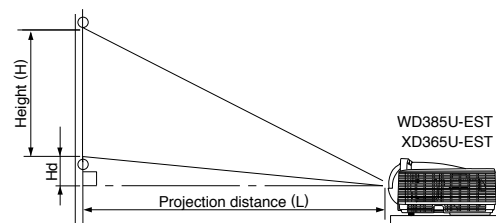

The above numbers are approximate, and may be slightly different from the actual measurements.

Screen size chart (WD385U-EST)

Screen (16 : 10)						Distance from screen (L)		Height of projected image (Hd)	
Diagonal size	Width (W)		Height (H)						
inch	cm	inch	cm	inch	cm	inch	m	inch	cm
70	178	59	151	37	94	22	0.56	4.6	12
80	203	68	172	42	108	25	0.64	5.3	13
100	254	85	215	53	135	32	0.82	6.6	17
120	305	102	258	64	162	39	0.99	7.9	20
150	381	127	323	79	202	49	1.25	9.9	25
180	457	153	388	95	242	60	1.51	11.9	30

Screen size chart (XD365U-EST)

Screen (4 : 3)						Distance from screen (L)		Height of projected image (Hd)	
Diagonal size	Width (W)		Height (H)						
inch	cm	inch	cm	inch	cm	inch	m	inch	cm
60	152	48	122	36	91	22	0.56	5.4	14
80	203	64	163	48	122	30	0.77	7.2	18
100	254	80	203	60	152	38	0.97	9.0	23
120	305	96	244	72	183	46	1.18	10.8	27
150	381	120	305	90	229	58	1.49	13.5	34



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

MITSUBISHI ELECTRIC EUROPE (BENELUX Office)

Nijverheidsweg 23A, 3641 RP Mijdrecht - The Netherlands
Tel: +31 (0)297-282461 Fax: +31 (0)297-283936 - www.MitsubishiElectric.nl

To find out more about WD385U-EST/XD365U-EST and our projectors, visit us at

<http://www.MitsubishiElectric.com/projectors/>



**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

Welcome to a New Level of Interactive Communication

Next-generation Short-throw Lens Projectors



NEW

WD385U-EST
XD365U-EST

for a greener tomorrow



Revised publication effective Jan. 2012.
Superseding publication of L-188-1-C8826-B Oct. 2011.
Specifications are subject to change without notice.

At the Forefront of Classroom Education

Mitsubishi Electric's WD385U-EST and XD365U-EST projectors have the world's shortest focal distance* and are equipped with a feature that revolutionizes visual interactive communication, interactive pens. In addition to performing the functions of a conventional mouse, the pens can be used to draw and write on the projector screen. Even in classrooms with limited space, our short-throw lenses secure the our short-throw lenses attract the audience's attention with large images and striking impact. This visual communications solution from Mitsubishi Electric further expands application possibilities, creating a level of interactivity that can bring projector usage to the forefront of classroom education.

*Units not equipped with mirrors


Note: Data researched by Mitsubishi Electric in August 2011.




No Special Interactive Board Required

Simply use the accompanying interactive pens to draw, write and perform the functions of a computer mouse on the projection screen.

All required software is pre-installed. Multiple pens can be used to write on projected images such as those of PowerPoint slides and educational software, thereby enabling truly interactive communication to develop between teachers and students. In addition, position coordinate data is pre-installed in the projector, allowing immediate use without having to perform the calibraton task of setting coordinate axes.

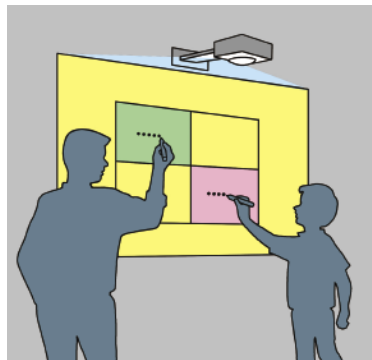

Dual Pen mode

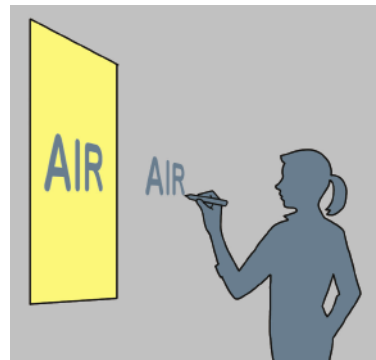

Extremely stable operation even at a distance



NEW WD385U-EST
XD365U-EST **WIDE WXGA**

Reliable, User-friendly Interactive Pen


- Write on projection screen without touching it using the Air Mouse function
- Use both pens simultaneously in Dual Pen mode



Ecology

Estimated 6000-hour lamp life (in Low mode)

A longer service life for the projection lamp has been achieved by incorporating an optimal design for lamp temperature control. Benefits include substantial reductions in projector operating cost and the labor required for changing the lamp.



• Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user's manual.

Auto Power Off

If no image signal is output for a predetermined period of time*, power is automatically turned off, realizing energy savings by reducing needless power consumption.

*Time preset by user

Stand-by Wattage under 0.5W*

Stand-by (low) mode power consumption is less than 0.5W, offering increased energy savings and further contributing to environmental preservation.


*When in stand-by (low) mode. At this time, use of the LAN function, RS-232C output is not possible.

Presentation

World Shortest* Focal Distance – 0.375 Throw Ratio (WD385U-EST)

*Units not equipped with mirrors *XD365U-EST throw ratio: 0.469
Note: Data researched by Mitsubishi Electric in August 2011.

Utilizing a large-diameter lens and optimal optical engine design, the shortest focal distance (throw ratio: 0.375) in the industry has been achieved. Even if the teacher or presenter must move in front of the projected image, they are neither blinded nor disturbed by projector light, enabling them to maintain eye contact with the audience at all times.

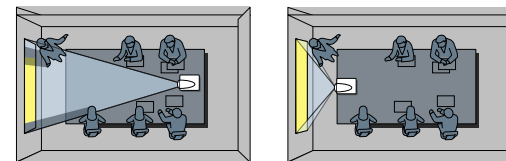

2800lm* High Brightness (WD385U-EST)

*XD365U-EST: 2500lm

The high 2800lm brightness (2500lm for XGA models) helps to ensure presentation images are clearly seen without lowering the light in the room.

3000:1 High Contrast

Dark chip3 is introduced to the DLP™ chip line-up. Stray-light processing has been optimized for the optical system, achieving a high contrast of 3000:1. This makes it possible to reproduce sharp, vivid images in which sentences and other characters can be easily read.

3D READY – Enjoy the future today

Experience the impact and allure of 3D images. The 3D video content must be in field sequential format and special electronic shutter glasses are required.



User-friendly

Quiet 28dB Operation


Projection fan noise can be distracting during a presentation or videoconference. The WD385U-EST and XD365U-EST projectors operate at a significantly low noise level of only 28dB (i.e., in "low lamp" mode). As a result, presentations and conferences can be held without distracting projector noise in the background.

Top-loading lamp for easier maintenance

Network

USB Display/LAN Display

To use the projector to reproduce images from a computer, a USB cable, LAN cable or commercially available wireless dongle can be used. For displaying images via a LAN, up to four computers can be connected to one projector. The projection screen can be divided into quarters, reproducing all computer screens simultaneously.

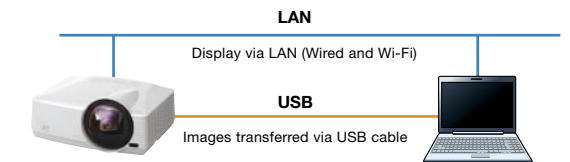


Notes:

- 1) Only one optional USB Type-A port from a computer can be directly connected to a projector. Multiple connections using a USB hub is not possible.
- 2) For displaying images via a LAN, network settings are required.
- 3) Not all USB dongles are compatible.

Remote Desktop

When using the LAN Display function, a USB mouse or USB keyboard can be connected to the projector enabling direct access to a computer utilizing the Internet or other application.

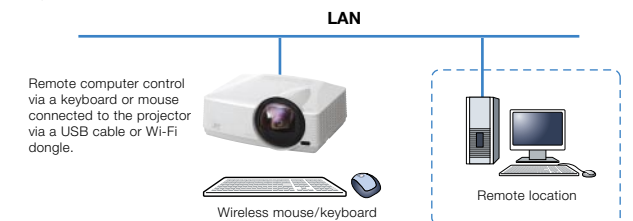


Computer-free Presentation (PC less presentation) [PtG file/JPEG Viewer]

Using "PtG Converter", PowerPoint files can be converted into a special format and saved on a USB storage device. When the USB device is connected to the projector, users can replay slideshows or animation effects using only the projector.

Note: The types of slideshows and animation effects that can be replayed are limited.

JPEG files saved on a USB storage device can be projected in slideshow style.

Note: Only compatible with JPEG files.

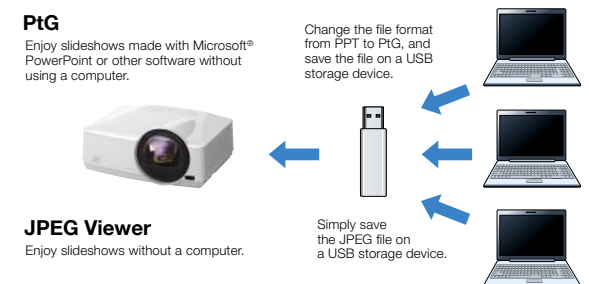

Simultaneous Message Display (Visual PA)

Network Connectivity




Audio

Excellent Sound Projection (10W Speaker+Audio Mix)

Using the "Audio Mix" feature and wireless microphone sold separately, the presenter's voice is reproduced loud and clear in real time.

Stand-by Audio

Even when the power to the projector is turned off, when an external audio device such as a DVD is connected, the projector speaker can be used as an audio speaker.



Audio Pass-through

Even when the power to the projector is turned off, when an external audio device such as a DVD or separate speaker is connected, the projector can be used as an amplifier.

