



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

MITSUBISHI ELECTRIC EUROPE (BENELUX Office)

Nijverheidsweg 23A, 3641 RP Mijdrecht - The Netherlands

Tel: +31 (0)297-282461 Fax: +31 (0)297-283936 - www.MitsubishiElectric.nl

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com>

■ All information contained herein is subject to change without prior notice.
■ HDMI,  and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
■  is a trademark of the Video Electronics Standards Association, registered in the U.S. and other countries.
■ Other brand, product, and service names are trademarks or registered trademarks of the respective companies.
■ Product appearance in this brochure does not imply that Mitsubishi Electric Corporation intends to make it available in all countries where the company and its subsidiaries operate.
■ Photographs are simulated images.

Revised publication effective Oct. 2011.
Supersedes publication S-S20-8-C8147-B May 2009.
Specifications are subject to change without notice.




MITSUBISHI
ELECTRIC

LCD PUBLIC DISPLAY

Changes for the Better

Expand Your Horizons

Public Displays for Wide-ranging Applications

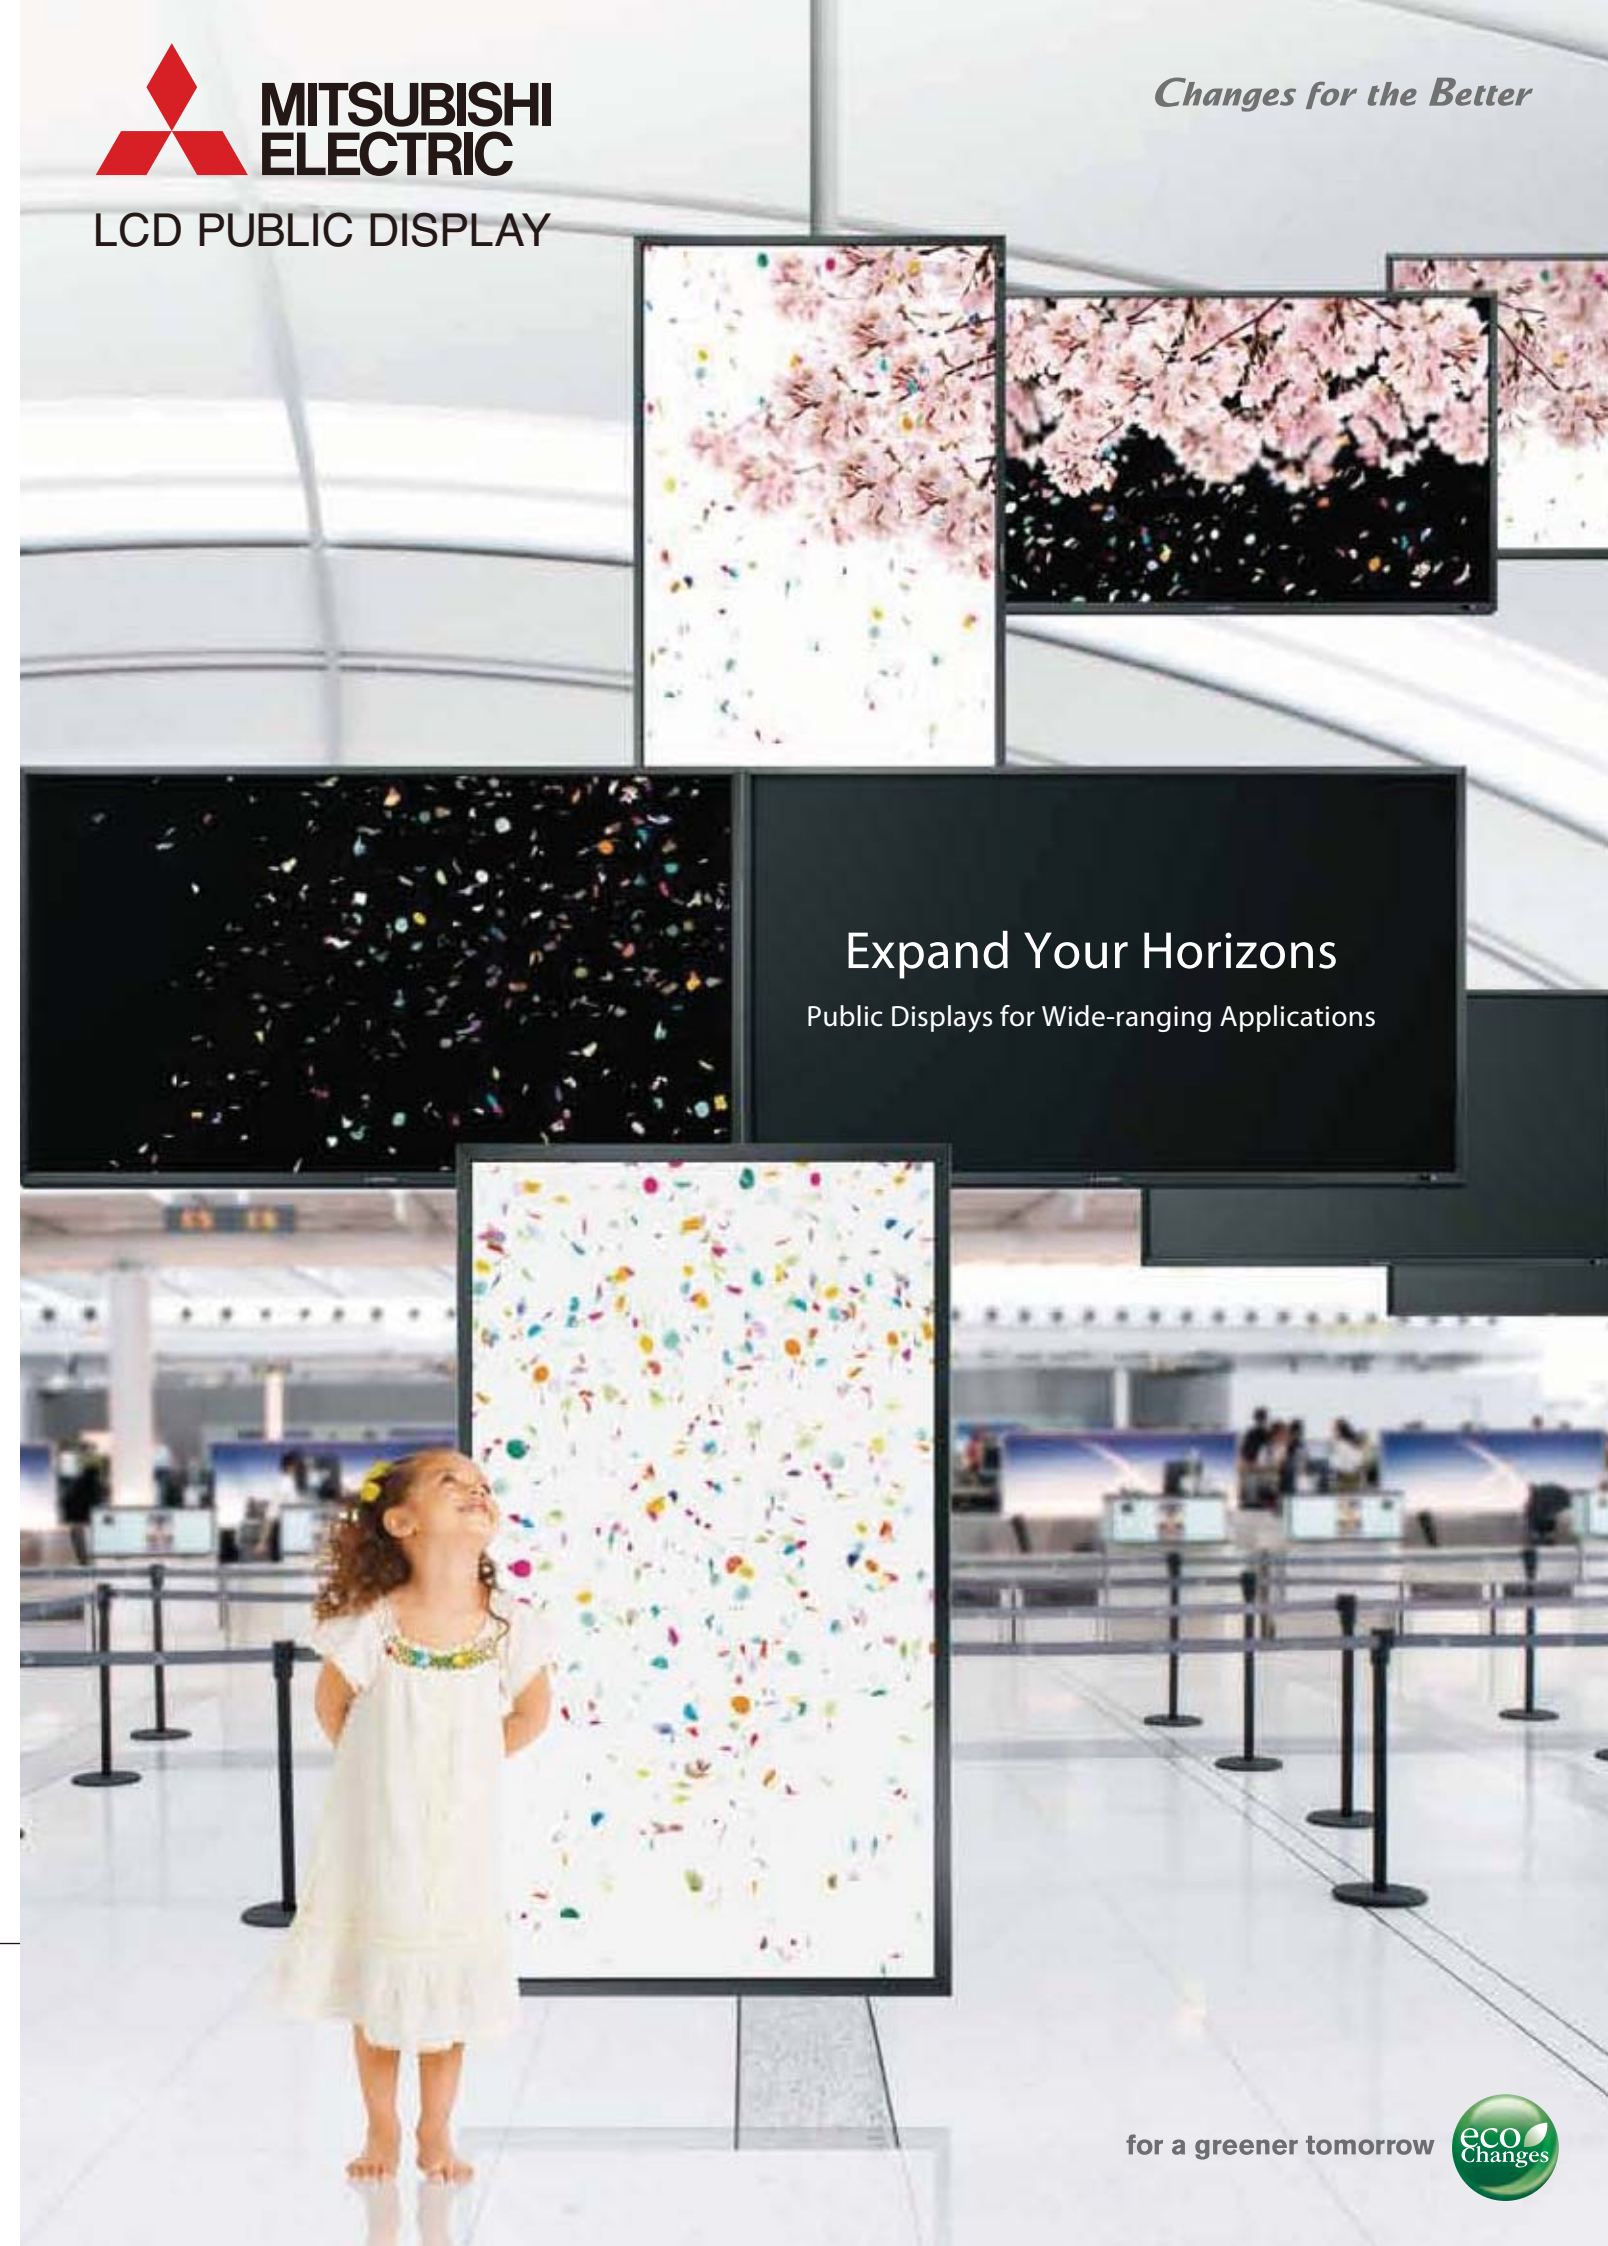

for a greener tomorrow



LCDs to Match an Impressively Wide Range of Applications



High functionality, stylish design and excellent durability – perfect for public spaces such as airports and train stations, and business or educational settings.

LCDs with eye-catching clarity and a range of features that expand application possibilities.



Advanced MDT Series LCDs



Economical LDT Series LCDs

MDT42IS/MDT52IS/MDT55IS/MDT652S

Highly functional, durable public displays for demanding commercial-use applications



Full 1920 × 1080 High-definition Resolution, High Brightness and High Durability

All MDT Series models feature full 1920 × 1080 high-definition resolution and high brightness of 700cd/m² for stunning image quality and remarkable clarity. Even in heavy-use applications such as airports where the displays are constantly working, high durability is provided through the use of parts with a long service life. In addition, the MDT551S is 120Hz-compatible, double the conventional 60Hz, for smooth playback of fast-moving images.



OPS-compatible (for MDT551S)

For the first time, Mitsubishi Electric offers compatibility with the Open Pluggable Specification (OPS) card, allowing insertion of a personal computer card*, which eliminates the time and effort required to connect a signal cable, and opens up a wider scope of applications.

*The MDT551S is compatible with Advantech Co. Ltd's ARK-DS220F-MTSA1E. For details, please contact a local Advantech dealership.



Video and Serial Control using Category-5 (CAT5) Cable

CAT5 ensures image quality, installation flexibility and serial control


Supports Cable Lengths of Up to 150 metres

Long VGA cables can lead to a loss in image quality and higher installation costs. However, the MDT521S and MDT652S have a built-in CAT5 receiver and CAT5 transmitter box as standard equipment (optional for the MDT421S and MDT551S), enabling the connection of much longer cables.



Video and Serial-control Signals via Single CAT5 Cable


Utilising the CAT5 transmitter box, video and RS-485 serial-control signals can be sent using the same CAT5 cable, eliminating the need for a separate serial-control cable.

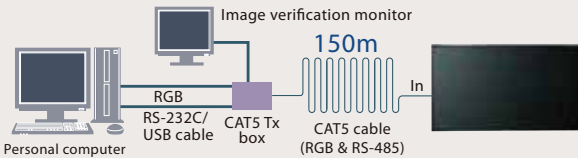

*Compatibility with commercially available controllers is not guaranteed. To create an environment for transmitting RS-485 signals, please follow the instructions in the user's manual.

Link Multiple Displays in Series using CAT5 Connections

Use the daisy-chain connection function of the CAT5 receiver and output terminal to link multiple displays in series via CAT5 cables.

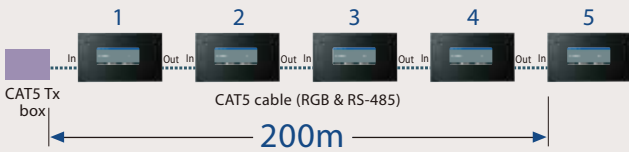


Connection	Max. cable length	Signal timing
One monitor	150m	1920×1080/60Hz
Multiple monitors	200m*	1920×1080/60Hz

* Total length of connected cables.
* Up to five displays can be linked in series (three displays for MDT551S).
* Degraded image quality and variance in possible connection distance may occur depending on factors such as installation conditions and the cable used.

CAT5 Image Quality Correction Tools

Various features have been incorporated to optimise image quality over long cable lengths.



- 1) Cable Length Selector
Changes to optimised default settings for cable lengths
- 2) Equaliser Function
Optimises signal shape to minimise image blur on the screen
- 3) R/G/B Gain Adjustment
Brightens dark images
- 4) R/G/B Skew Compensation
Corrects colour deviation


* CAT5 connectors can only be connected to the CAT5 transmitter box, included with the MDT521S and MDT652S models, and available as an option for the MDT421S and MDT551S. Do not attempt to connect any other network hardware as it may result in damage to the hardware connected, transmitter box and/or displays.

SDI Card-compatible (for MDT551S)

An SDI card is available as an option for the MDT551S, providing compatibility with signal formats (3G-SDI, HD-SDI, SD-SDI) used as standard in the broadcast industry. Daisy chains with a cable length of up to 350 metres long and consisting of a maximum of 25 display units are possible.

Connection	Max.cable length		
	SD-SDI	HD-SDI	3G-SDI
One monitor	300m	200m	100m
Multiple monitors (total cable length)	350m	250m	150m

* Possible transmission distance varies depending on installation conditions and the cable used.

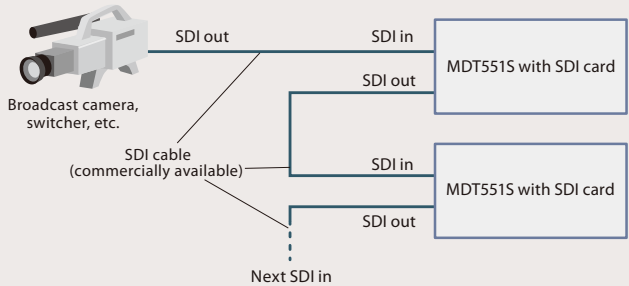

LAN-based Control (for MDT551S and MDT652S)


The MDT551S and MDT652S models can be controlled remotely via an Ethernet LAN.



Auto Brightness Control

Front/Rear sensors – a unique innovation from Mitsubishi Electric

MDT Series models are equipped with light sensors, one each installed in the front and rear, for automatic brightness control. Even when used at venues where lighting conditions change continuously, optimum viewing is ensured. An added benefit is that panel service life and energy savings are increased through lower power consumption in darker environments.

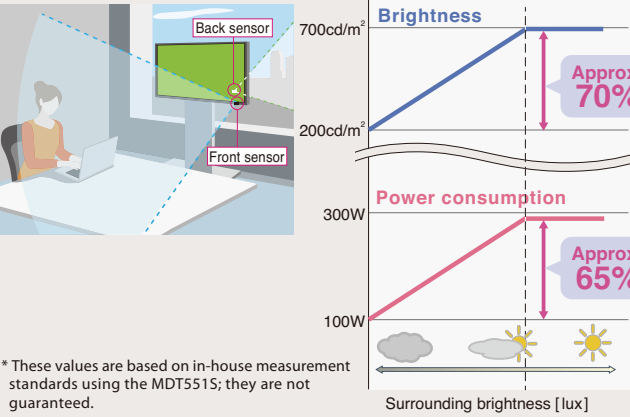

* These values are based on in-house measurement standards using the MDT551S; they are not guaranteed.


Energy Star-compliant (for MDT551S)

As a mark of its energy-efficiency, the MDT551S is compliant with Energy Star international standards.



Colour Matching for Multi-screen Applications (available as service option only)

Qualified service personnel can utilise original colour calibration software and a designated colour sensor to adjust the whitepoint, brightness and gamma curve settings* to match adjacent panels.



* Available for the MDT551S.

In-floor/Face-up* Use Realised – Expanding Installation Flexibility Beyond Landscape and Portrait Applications

Display orientation is a key factor for the presentation and appearance of monitors. Advanced design technologies allow maximum flexibility in the positioning of the MDT521S and MDT551S, from landscape, portrait and angled positions to fully flat (face-up*) installations.

* Internal cooling fan must operate full-time when a panel is used in a face-up installation. Face-down/upside-down installation is not supported.



Built-in Speakers (for MDT551S)

Two 10W built-in speakers are equipped.

Enhanced Connectivity with DisplayPort Terminal

The MDT421S, MDT551S and MDT652S are equipped with a DisplayPort terminal, a next-generation digital interface designed to enable maximum display performance and deliver video and other signals over a single cable up to 15 metres in length.



Other Features

Other features include a multi-level screensaver function, programmable scheduling function, tiling capability with frame compensation, RS-232C communications, PiP, PoP and side-by-side, wide-ranging colour temperature adjustment, power-on delay, auto adjust and auto set-up, and IR remote lock.

LDT323V/LDT422V/LDT46IV2 /LDT551V

Affordable models providing reliable performance and an impressive range of useful features



Versatile Connections through CAT5 Compatibility (for LDT551V)

The following features are included as part of compatibility with CAT5 connections:

- Support for cable lengths of up to 150 metres
- Video and serial-control signals via a single CAT5 cable
- Capability to link up to three displays in series
- CAT5 image quality correction tools



Multi-level Screensaver Function

To reduce image persistence and maximise panel service life in demanding signage applications, all models are equipped with a four-level screensaver function. Each level can be set to meet specific application requirements.

- Gamma mode: Optimises the gamma curve
- Cooling fan mode: Fan operates continuously rather than automatically activating when internal temperature reaches the predesignated limit
- Brightness mode: Adjustment of display brightness
- Motion mode: Images can be slightly shifted in four directions according to user-specified time intervals



Programmable Scheduling Function

Up to seven different scheduled intervals can be programmed according to time, day of week and input port. Additionally, content from different sources can be scheduled for specific displays within the same installation. Increased panel service life and energy savings are also possible through a well-planned schedule in which displays are turned off when not required.



Power-save Function for PC and Video Signals

The monitor can be set to automatically go into power management mode when either the PC signal (RGB sync) or video input signal is lost. This saves both power and the need to individually turn off each monitor when not in use, such as during the time a location is closed.



Energy Star-compliant (for LDT551V)

As a mark of its energy-efficiency, the LDT551V is compliant with Energy Star international standards.




Vertical Installation, Tiling and Long Cable Capability

Displays can be mounted vertically, creating a whole new range of installation possibilities more closely matched to design needs.



Tiling Capability with Frame Compensation

Combine up to 25 panels (5 wide x 5 high) to create a single large image (i.e. video wall) or other high-impact signage. A frame compensation function is incorporated to adjust for the width of panel bezels so that images are displayed with the utmost accuracy.



Frame compensation off



Frame compensation on

Remote Management & Diagnostics via Bi-lateral RS-232C Communications

Use this feature to create an independent interface on a personal computer for remote control and adjustment of monitors. All models can be daisy-chained to save on cabling costs as illustrated below. Daisy-chained monitors can be simultaneously controlled or adjusted. Using a unique ID number, each monitor (up to 26 in a daisy-chain) can be controlled independently.



In addition, critical indicators of monitor status such as input signal, cooling fan and internal temperature can be verified remotely (cooling fan starts automatically when the internal temperature rises beyond a certain limit). Remote asset management is also available to verify model and serial number.



LAN-based Control (for LDT551V)


The LDT551V model can be controlled remotely via an Ethernet LAN.



PiP, PoP and Side-by-side

Picture-in-Picture and Picture-out-of-Picture modes are provided, enabling content from a video input source to be displayed in window format while displaying the main image from the computer source or vice versa.

All models are equipped with a side-by-side mode, an ideal feature for broadcasting and video-conferencing applications.

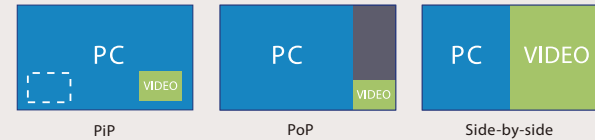


Wide-ranging Colour Temperature Adjustment

Colour temperature can be adjusted across a wide range, from 2,600-10,000K. This is an important function for signage displays used in broadcasting, retail, food and other industries where image reproduction in true colours and tones is vital.



Power-on Delay

For installations employing numerous monitors, the power-on delay function allows each monitor to be set to power-up between 2-50 seconds after power is supplied. This allows the monitors to power-up sequentially, avoiding inrush current problems and reducing overall electrical load requirements when using the same power supply.



Auto Adjust & Auto Set-up

Automatically adjusts the screen position, phase and clock when the input signal timing is changed. In addition, Auto Set-up quickly adjusts more items such as screen size and white and black levels with a single touch via the IR remote control.

IR Remote Lock

The remote-control receiver can be turned off to prevent unauthorized personnel from changing display settings or selected inputs.











Built-in Speakers (for LDT551V)

Two 10W built-in speakers are equipped.

Other Features

Other features include side border colour select; and for the LDT551V, colour matching for multi-screen applications and DisplayPort.

Full Line-up

Resolution			MDT Series LCDs Full HD				WXGA		LDT Series LCDs Full HD											
Size			42		52		55		65		32		42		46		55			
Model			 MDT421S		 MDT521S		 MDT551S		 MDT652S		 LDT323V		 LDT422V		 LDT461V2		 LDT551V			
Dimensions			 Unit: mm		 Unit: mm		 Unit: mm		 Unit: mm		 Unit: mm		 Unit: mm		 Unit: mm		 Unit: mm			
Specifications																				
Orientation			Landscape/Portrait		Landscape/Portrait/Face-up		Landscape/Portrait/Face-up		Landscape/Portrait		Landscape/Portrait		Landscape/Portrait		Landscape/Portrait		Landscape/Portrait			
LCD module	Screen size (diagonal)		42" (1067mm)		52" (1322mm)		54.6" (1388mm)		64.5" (1639mm)		31.5" (800mm)		42" (1067mm)		46" (1168mm)		54.6" (1388mm)			
	Panel type		IPS		VA		IPS		VA		VA		IPS		VA		VA			
	Pixel pitch		0.485mm		0.600mm		0.630mm		0.744mm		0.511mm		0.485mm		0.530mm		0.630mm			
	Resolution		1920 × 1080 (Full HD)		1920 × 1080 (Full HD)		1920 × 1080 (Full HD)		1920 × 1080 (Full HD)		1366 × 768		1920 × 1080 (Full HD)		1920 × 1080 (Full HD)		1920 × 1080 (Full HD)			
	Colour		Approx. 1.06 billion		Approx. 16.7 million		Approx. 1.06 billion		Approx. 1.06 billion		Approx. 16.7 million		Approx. 1.06 billion		Approx. 16.7 million		Approx. 1.06 billion			
	Brightness		Max.: 700cd/m ²		Max.: 700cd/m ²		Max.: 700cd/m ²		Max.: 700cd/m ²		Max.: 700cd/m ²		Max.: 450cd/m ²		Max.: 500cd/m ²		Max.: 450cd/m ²		Max.: 500cd/m ²	
Viewing area	Contrast ratio		1100:1		2000:1		1300:1		2500:1		2500:1		1300:1		4000:1		5000:1			
	Viewing angle (CR≥10)		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°		Up/Down 178°, Left/Right 178°			
	Response time		9ms (Grey to Grey)		8ms (Grey to Grey)		10ms (Grey to Grey)		8ms (Grey to Grey)		6.5ms (Grey to Grey)		9ms (Grey to Grey)		8ms (Grey to Grey)		8ms (Grey to Grey)			
	Viewing area		930 × 523mm (36.6 × 20.6")		1152 × 648mm (45.4 × 25.5")		1209 × 680mm (47.6 × 26.8")		1428 × 804mm (56.2 × 31.6")		698 × 392mm (27.5 × 15.4")		930 × 523mm (36.6 × 20.6")		1018 × 573mm (40.1 × 22.5")		1209 × 680mm (47.6 × 26.8")			
Power management			VESA DPM		VESA DPM		VESA DPM		VESA DPM		VESA DPM		VESA DPM		VESA DPM		VESA DPM			
Plug-n-Play			VESA DDC2B, DDC/CI		VESA DDC2B, DDC/CI		VESA DDC2B, DDC/CI		VESA DDC2B, DDC/CI		VESA DDC2B/DDC-CI		VESA DDC2B/DDC-CI		VESA DDC2B/DDC-CI		VESA DDC2B, DDC/CI			
Auto adjustment			Position, Phase, Clock		Position, Phase, Clock		Contrast, Position, Phase, Clock		Position, Phase, Clock		Position, Phase, Clock		Position, Phase, Clock		Position, Phase, Clock		Contrast, Position, Phase, Clock			
OSD user functions			Brightness, contrast, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, etc.		Brightness, contrast, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, CAT5 control, etc.		Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, Programmable LUT, etc.		Brightness, contrast, black level, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, CAT5 control, LAN control, closed caption, etc.		Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, etc.				Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, Programmable LUT, etc.					
Input/ Output signal	PC input/output	Input connector (Analog)	HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort			Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort			Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common)			Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common)					
		Output connector (Analog)	HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort			HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort			HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort			HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common)					
		CAT5 input	Optional modular 8-pin × 1 providing RGB differential video and RS-485 control support			Modular 8-pin × 1 providing RGB differential video and RS-485 control support			Modular 8-pin × 1 providing RGB differential video and RS-485 control support			—			Optional modular 8-pin×1 providing RGB differential video and RS-485 control support					
		CAT5 output	Optional modular 8-pin × 1providing RGB differential video and RS-485 control support			Modular 8-pin × 1 providing RGB differential video and RS-485 control support			Modular 8-pin × 1 providing RGB differential video and RS-485 control support			—			Optional modular 8-pin×1 providing RGB differential video and RS-485 control support					
		Horizontal frequency	15.625/15.734, 31.5 - 91.1kHz			50.0, 58.0 - 85.0Hz			15.625/15.734, 31.5 - 91.1kHz			50.0, 58.0 - 85.0Hz			15.625/15.734, 31.5 - 91.1kHz					
		Vertical frequency	15.625/15.734, 31.5 - 91.1kHz			50.0, 58.0 - 85.0Hz			15.625/15.734, 31.5 - 91.1kHz			50.0, 58.0 - 85.0Hz			15.625/15.734, 31.5 - 91.1kHz					
		Video signal	Analog: separate (TTL), composite (0.3V), Sync-on-Green, Digital: TMDS			Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMDS			Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMDS			Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMDS			Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMDS					
	AV input/output	Resolutions supported	640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)			640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)			640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)			640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)			640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)					
		Input connector (Analog)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr;PC/AV common)			Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr;PC/AV common)			Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr;PC/AV common)			Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr;PC/AV common)			Composite video <BNC, RCA>, S-terminal, BNC(Y/Pb/Pr;PC/AV common)					
		Output connector	HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)			HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)					
	Audio input/output	Resolutions supported	Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p			Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p			Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p			Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p			Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p					
Input connector (Analog)		RCA pin jacks × 2 (L/R), stereo mini jack			RCA pin jacks × 2 (L/R), stereo mini jack			RCA pin jacks × 2 (L/R), stereo mini jack			RCA pin jacks × 2 (L/R), stereo mini jack			RCA pin jacks × 2 (L/R), stereo mini jack						
Output connector		HDMI RCA pin jacks (L/R)			HDMI RCA pin jacks (L/R)			HDMI RCA pin jacks (L/R)			HDMI RCA pin jacks (L/R)			HDMI RCA pin jacks (L/R)						
Speaker/Audio output			External speaker jacks (7W+7W)			External speaker jacks (7W + 7W) and internal speakers (10W + 10W)			External speaker jacks (7W+7W)			External speaker jacks (7W+7W)			External speaker jacks (7W + 7W) and internal speakers (10W + 10W)					
Control input/output	Input connector	RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>						
	Output connector	RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>			RS-232C<D-sub 9-pin>						
USB hub			—			Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0			—			—			Self/bus-powered, 1 upstream (external connection only)/4 downstream, USB2.0					
OPS slot			—			OPS slot supported			—			—			—					
Power supply	Voltage, Current								100-240VAC, 50/60Hz											
	Consumption		Max.: 232W (214W w/o speakers)		Max.: 380W (360W w/o speakers)		Max.: 316W (293W w/o speakers) Factory default settings: 202W		Max.: 458W (445W w/o speakers) Factory default settings: 361W		Max.: 103W (85W w/o speakers)		Max.: 203W (182W w/o speakers) Factory default settings: 136W		Max.: 265W (245W w/o speakers)		Max.: 344W (322W w/o speakers) Factory default settings: 203W			
	Consumption in sleep mode		Less than 3W (CAT5: 5W)			Less than 1W (CAT5: 5W)		Less than 3W (CAT5: 5W)		Less than 3W (CAT5: 5W)		Less than 2W		Less than 5W		Less than 1W (CAT5: 5W)				
Operating environment	Main power switch off: 0W																			
	Temperature		Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)		Landscape mode: 5-40°C (41-104°F) Portrait mode/Face-up mode: 5-35°C (41-95°F)		Landscape mode: 5-40°C (41-104°F) Portrait mode/Face-up mode: 5-35°C (41-95°F)		Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)		Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)									
Dimensions (WxHxD)	Humidity		20-80% (without condensation)			20-80% (without condensation)			20-80% (without condensation)			20-80% (without condensation)								
	Net		966 × 559 × 116mm (38.0 × 22.0 × 4.6")		1202 × 698 × 122mm (47.3 × 27.5 × 4.8")		1251 × 721 × 127mm (49.3 × 28.4 × 5.0")		1498 × 873 × 139mm (59.0 × 34.4 × 5.5")		789 × 476 × 133mm (31.1 × 18.7 × 5.2")		1023 × 614 × 133mm (40.3 × 24.2 × 5.2")		1122 × 663 × 136mm (44.2 × 26.1 × 5.4")		1299 × 770 × 125mm (51.1 × 30.3 × 4.9")			
Weight	Overall		1130 × 709 × 280mm (44.5 × 28.0 × 11.0")		1405 × 951 × 275mm (55.3 × 37.4 × 10.8")		1474 × 938 × 346mm (58.0 × 36.9 × 13.6")		1774 × 1200 × 375mm (69.8 × 47.2 × 14.8")		930 × 645 × 325mm (36.6 × 25.4 × 12.8")		1150 × 775 × 295mm (45.3 × 30.5 × 11.6")		1285 × 885 × 275mm (50.6 × 38.8 × 10.8")		1474 × 938 × 346mm (58 × 36.9 × 13.6")			
	Net		Approx. 23.5kg/51.8lbs		Approx. 40.0kg/88.2lbs		Approx. 37.0kg/81.6lbs		Approx. 46.5kg/102.5lbs		Approx. 14.5kg/32.0lbs		Approx. 20.5kg/45.2lbs		Approx. 28.0kg/61.6lbs		Approx. 39.9kg/88.0lbs			
Wall mounting interface	Gross		Approx. 31.0kg/68.3lbs		Approx. 49.0kg/108.0lbs		Approx. 47.5kg/104.7lbs		Approx. 62.4kg/137.6lbs		Approx. 20.0kg/44.1lbs		Approx. 27.7kg/61.1lbs		Approx. 35.0kg/77.0lbs		Approx. 50.6kg/111.6lbs			
	Wall mounting interface		12 holes, M6 screws (100mm (4.0") pitch) for monitor mount		8 holes, M8 screws (200mm (7.9") pitch) for monitor, 4 holes x 2 sets, M4 screws (100mm (4.0") pitch) for SBC, Signage player mounted on monitor		(100mm (4.0") pitch) for SBC ,		12 holes, M6 screws (100mm (4.0") pitch) for monitor mount						8 holes, M8 screws (200mm (7.9") pitch) for monitor, 4 holes x 2 sets, M4 screws (100mm (4.0") pitch) for SBC, Signage player mounted on monitor					
Regulation/Guideline compliance			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/ C-Tick/RoHS/US Mercury/CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-A /DOC-A/C-Tick/RoHS/US Mercury/Energy Star/ CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/ C-Tick/RoHS/US Mercury/CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/C-Tick/RoHS/US Mercury/ CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/ FCC-A/DOC-A/C-Tick/RoHS/US Mercury/ CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/ FCC-B/DOC-B/C-Tick/RoHS/US Mercury/ Energy Star/CCC only for Chinese model		
Accessories			Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps, etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps (for power cord and HDMI cable), CAT5 transmitter box, CD-ROM (USB driver), etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps (for power cord and HDMI cable), etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), CAT5 transmitter box, CD-ROM, etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, main power switch cover, clamps, cable bands, etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, main power switch cover and screws, clamps (for power cord and HDMI cable), clamps and screws for securing panel		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps, main power switch cover, cable bands, etc.		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), etc.			
Functions & Features																				
Colour temperature			2600-10000K (100K step)			2600-10000K (100K step)			2600-10000K (100K step)			2600-10000K (100K step)			2600-10000K (100K step)			2600-10000K (100K step)		
Digital zoom			✓			✓ (custom zoom)			✓ (custom zoom)			✓ (custom zoom)			✓ (custom zoom)			✓ (custom zoom)		
Tiling and frame compensation			Max. 5 × 5			Max. 5 × 5			Max. 5 × 5			Max. 5 × 5			Max. 5 × 5			Max. 5 × 5		
PIP/PoP			PIP, PoP, Side-by-side			PIP, PoP, Side-by-side			PIP, PoP, Side-by-side			PIP, PoP			PIP, PoP, Side-by-side			PIP, PoP, Side-by-side		
Scheduling			✓			✓			✓			✓			✓			✓		
Screensaver (Motion)			✓			✓			✓			✓			✓			✓		
Side border colour			✓			✓			✓			✓			✓			✓		
Power-on delay			✓			✓			✓			✓			✓			✓		

Options

Stereo Speakers



SP-321V
For LDT323V



SP-422V
For LDT422V



SP-461V
For LDT461V2



SP-421S
For MDT421S



SP-521S
For MDT521S



SP-551S
For LDT551V/MDT551S/
MDT652S



LDT323V



LDT422V



LDT461V2



MDT421S



MDT521S



MDT551S

*Photos show units with speakers attached.

Stands



ST-322V
For LDT323V



ST-422V
For LDT422V



ST-461V
For LDT461V2/LDT551V/
MDT551S



ST-521S
For MDT421S/MDT521S

Coloured Bezels



OB-421S-AS
Colour: Aluminum silver (no logo)
For MDT421S



OB-521S-AS
Colour: Aluminum silver (no logo)
For MDT521S

A construction allowing the bezel to be changed by the user has been adopted.
Please contact a local dealership for more information.

Other Options

DP-1CA5 CAT5 Kit For MDT421S

CAT5 Transmitter Box



CAT5 Receiver Box



DP-2CA5-T/DP-2CA5-R CAT5 Kit For MDT551S/LDT551V

CAT5 Transmitter Box



CAT5 Receiver Box



DP-1SDI-3G SDI Box For MDT551S



Model Name	Stereo Speakers						Stands				CAT5 Kit		SDI Box
	SP-321V	SP-422V	SP-461V	SP-421S	SP-521S	SP-551S	ST-322V	ST-422V	ST-461V	ST-521S	DP-1CA5	DP-2CA5-T/DP-2CA5-R	
LDT323V	✓	—	—	—	—	—	✓	—	—	—	—	—	—
LDT422V	—	✓	—	—	—	—	—	✓	—	—	—	—	—
LDT461V2	—	—	✓	—	—	—	—	—	✓	—	—	—	—
LDT551V	—	—	—	—	—	✓	—	—	✓	—	—	✓	—
MDT421S	—	—	—	✓	—	—	—	—	—	✓	—	—	—
MDT521S	—	—	—	—	✓	—	—	—	—	✓	—	—	—
MDT551S	—	—	—	—	—	✓	—	—	✓	—	—	✓	✓
MDT652S	—	—	—	—	—	✓	—	—	—	—	—	—	—

*The CAT5 Kit is standard equipment for MDT521S/MDT652S.


Connector Terminals

MDT Connector Terminals

MDT421S



MDT521S



MDT551S



MDT421S



MDT521S




MDT551S




MDT551S



MDT652S



MDT551S




1 Power in (3-pin with earth terminal)
2 External speaker terminals
3 Audio out (RCA)
4 Audio in 1, 2, 3
5 RGB 1 in (HDMI)
6 RGB 2 in (DVI-D)
7 RGB 3 in (mini D-sub 15-pin)
8 RGB out (mini D-sub 15-pin)
9 RGB 6 in (DisplayPort)
10 RGB 5, CAT5 I/O (modular connector 8-pin)
11 Slot for optional CAT5 receiver box
12 RS-232C (D-sub 9-pin)
13 Video I/O (BNC/S-terminal/RCA)
14 S-Video in (mini DIN 4-pin)
15 Video in (BNC/RCA)
16 Video out (BNC)
17 RGB 4 in, DVD/HD in (BNC)
18 USB hub
19 LAN connector


1 Power in (3-pin with earth terminal)
2 External speaker terminals
3 LAN (modular connector 8-pin)
4 RS-232C (D-sub 9-pin)
5 Audio in 1, 2, 3
6 Audio out (RCA)
7 Video I/O (BNC/S-terminal)
8 S-Video in (mini DIN 4-pin)
9 Video in (BNC)
10 Video out (BNC)
11 RGB 6 in (DisplayPort)
12 RGB 1 in (HDMI)
13 RGB out (mini D-sub 15-pin)
14 RGB 2 in (DVI-D)
15 RGB 3 in (mini D-sub 15-pin)
16 RGB 4 in, DVD/HD in (BNC)
17 RGB 5, CAT5 I/O (modular connector 8-pin)

LDT Connector Terminals


LDT323V/LDT422V

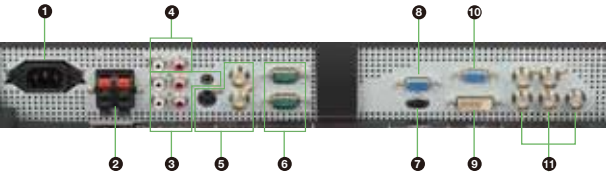

LDT461V2



LDT551V



1 Power in (3-pin with earth terminal)
2 External speaker terminals
3 Audio in
4 Audio out (RCA)
5 Video I/O (BNC/S-terminal)
6 S-Video in (mini DIN 4-pin)
7 Video in (BNC)
8 Video out (BNC)
9 RS-232C (D-sub 9-pin)
10 RGB 1 in (HDMI)
11 RGB out (mini D-sub 15-pin)
12 RGB 2 in (DVI-D)
13 RGB 3 in (mini D-sub 15-pin)
14 RGB 4 in, DVD/HD in (BNC)
15 RGB 5, CAT5 I/O (modular connector 8-pin)
16 External speaker terminals
17 Power in (3-pin with earth terminal)
18 RGB1/2 in (HDMI 1/2)
19 RGB 3 in (mini D-sub 15-pin)
20 RGB 4 in [R, G, B, H, V] (BNC)
21 RGB out (mini D-sub 15-pin)
22 DVD/HD in [Y, Pb/Cb, Pr/Cr] (BNC)
23 Audio in 1, 2, 3
24 Audio out
25 RS-232C (D-sub 9-pin)
26 Video I/O (BNC/S-terminal/RCA)
27 S-Video in (mini DIN 4-pin)
28 Video in (BNC/RCA)
29 Video out (BNC)
30 Option slot

1 Power in (3-pin, with earth terminal)
2 USB hub
3 RGB 6 in (DisplayPort)
4 RGB 1 in (HDMI)
5 RGB 2 in (DVI-D)
6 RGB 3 in (mini D-sub 15-pin)
7 RGB out (mini D-sub 15-pin)
8 RGB 4 in, DVD/HD in (BNC)
9 Video I/O (BNC/S, RCA connectors)
10 External speaker terminals
11 Audio out (RCA)
12 Audio in 1, 2, 3
13 RS-232C (D-sub 9-pin)
14 LAN connector
15 Option slot

*HDCP compatibility is not supported when DVI-D is connected to a Macintosh computer. HDCP: High-bandwidth Digital Content Protection