

MH70S

Rugged Data Storage & NAS Computer with Intel Core i3/i5/i7 Modular Embedded System for Industrial Automation & Railway Transport

- » Compact 40 HP turn-key system
- » Rack-mounted or wall-mounted
- » Fanless operation or forced-air cooling
- » Intel Core i7 or Celeron, TPM optional
- » Up to 16 GB DDR3 DRAM soldered, ECC
- » Up to 20 TB storage capacity (depending on RAID level and HDD sizes)
- » Up to 5 hot-swappable HDD/SSD carriers in different RAID configurations
- » Single or redundant power supplies or uninterruptible power supply (AC or DC)
- » Optional PCI Express Mini Card slots for WLAN, GSM (2G), UMTS (3G), LTE (4G), GPS or GLONASS functionality
- » Optional PoE PSE capable 4-port switch
- » Compliant to EN 50155 (railways)



Modular, Built-to-Order Configuration

The MH70S is a modular turn-key storage PC which meets the requirements of storage intensive applications such as digital video recorders, content servers or NAS. It is designed for use in trains, trams or industrial environments.

The system consists of a modular 40 HP CompactPCI Serial system which can be wall or rack-mounted. The system can be cooled by natural convection or using an additional fan tray at the bottom of the system. Cooling is independent of the mounting position.

The PC offers a multitude of configuration possibilities which are built to order resulting in a fast time-to-market.

Storage, Ethernet Switch and Wireless Functionality

Thanks to its up to five HDD/SSD carriers (2 HDDs each), the MH70S forms a high performance and high capacity storage system. Up to eight PoE PSE ports supplying eight devices with a maximum of 100 Watts in total can be implemented. For robust and safe operation, the HDD carriers can be configured in RAID 0, 1 or 5 while the carriers themselves have their own internal RAID 0, 1 and JBOD hardware configuration possibility.


The system offers up to 2 Gigabit Ethernet interfaces at the front of the CPU board. PCI Express Mini cards for wireless functions such as WLAN and UMTS can also be provided.

High-Performance Processor and System Control

The system is based on a high-performance Intel Core i7 processor supporting Intel AMT functionality. Data security can be assured using a TPM module. A system management controller complements the self-control and self-monitoring capabilities. It manages life-time information about, e.g., the fans, power supplies and can be used for manual shutdown.

Redundant Power Supply

The pre-configured system offers two PSU slots to ensure reliability and redundancy. Normal operation is guaranteed if at least one external voltage is present. AC or DC power supplies can be implemented. Each power supply has its own power source. This allows the system to be fed from independent power distribution networks assuring failover functionality and power-cut bridging.

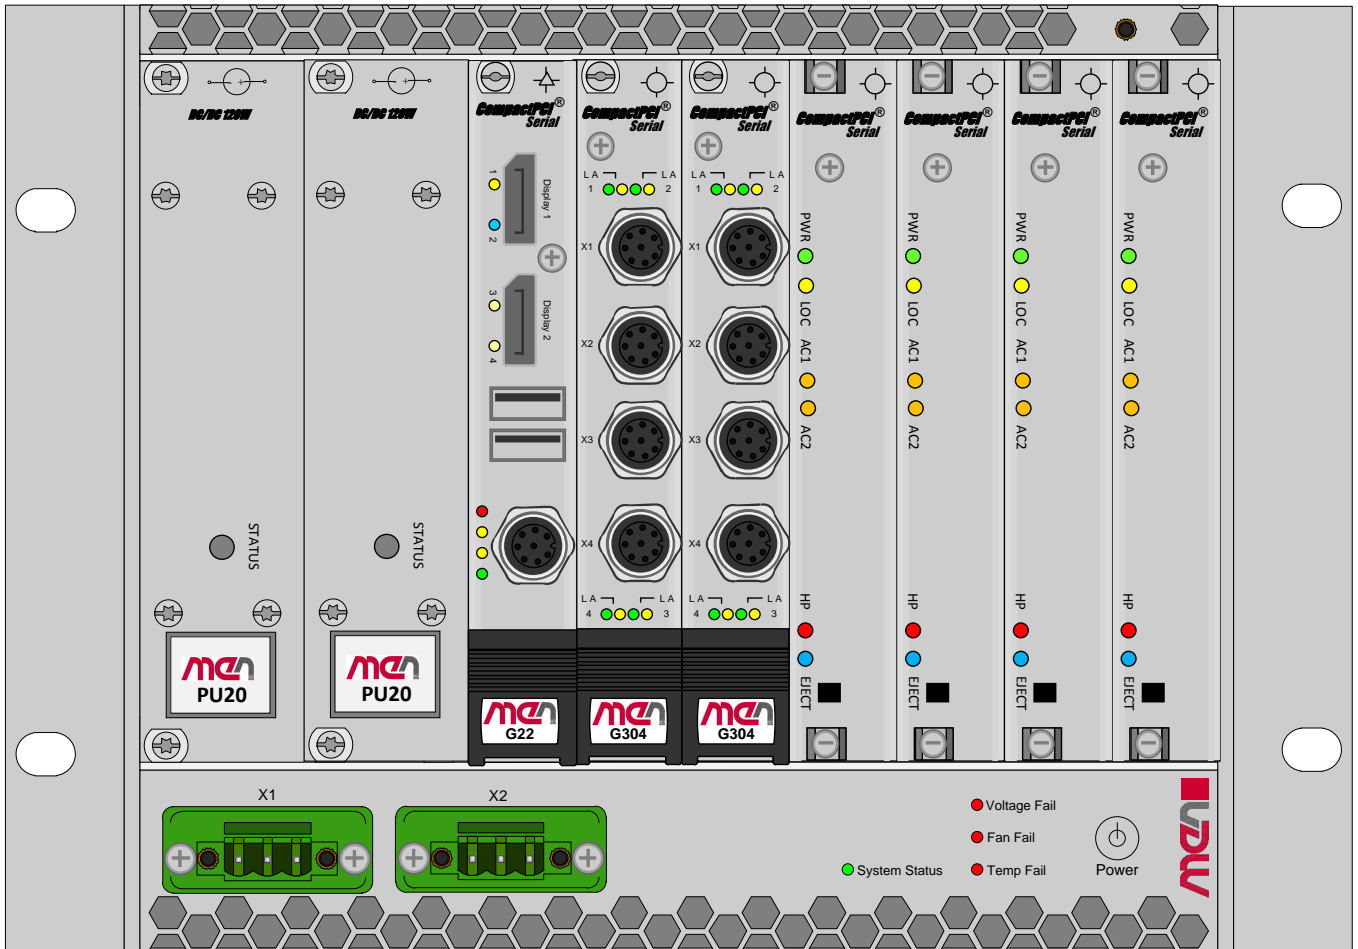

Page 2

CPU Board

- CPCI Serial 3U Board
- Configurable: yes
- Possible Configurations:
 - Intel Celeron 2002E 1.5 GHz, 4 GB DDR3 DRAM with ECC, front: 2 DisplayPort, 2 USB, 2 Gb Ethernet (RJ45), -40°C to +85°C screened
 - Intel Core i7-4700EQ 2.4 GHz, 16 GB DDR3 DRAM with ECC, front: 2 DisplayPort, 2 USB, 2 Gb Ethernet (RJ45), 0°C to +60°C
 - Intel Celeron 1047UE 1.4 GHz, 2 GB DDR3 DRAM with ECC, front: 1 Gb Ethernet (M12), -40°C to +85°C screened, conformal coating
 - Intel Core i7-3612QE SV, 2.1 GHz, 8 GB DDR3 DRAM with ECC, 1 Gb Ethernet (M12), 0°C to +60°C screened, conformal coating
- Mass Storage
 - SSD mSATA, 8 GB, -40°C to +85°C or
 - SSD mSATA 3.x, 64 GB, MLC, -40°C to +85°C

Supervision and Control

- Dedicated shelf controller monitors power, CPU status, temperature; controls fan; provides status LEDs and power button
 - [More information on AF2 Shelf Controller for CompactPCI and CompactPCI Serial Systems](#)

Power Supply

- PSU 3U
- Configurable: yes
- Possible Configurations:
 - 120 W, 3U 6 HP PSU, wide range input 24 to 110 V DC, 24 V DC nom., output 12 V / 5 V / 3.3 V DC, -40°C to +85°C, qualified, conformal coating
 - 120 W, 3U 6 HP PSU, wide range input 100 to 240 V AC, output 12 V / 5 V / 3.3 V DC, -40°C to +85°C, qualified, conformal coating
- Two separate power inlet connectors
- Normal operation if at least one external voltage is present

Wireless Functionality via PCI Express Mini Cards

- CPCI Serial 3U Board
- Configurable: yes
- Possible in CompactPCI Serial peripheral slot: 1, 2
- 2 PCI Express Mini Card slots (USB and PCIe), -40°C to +85°C screened
 - [More information on G212 PCI Express Mini Card carrier](#)
- Possible Configurations
 - WLAN PCI Express MiniCard DNXA-116, -40°C to +85°C screened
 - MC7304 PCI Express MiniCard, full-size on USB: LTE, DC-HSPA+, HSPA+, HSDPA, HSUPA, WCDMA, GSM, GPRS, EDGE, and GNSS, -40°C to +85°C

Ethernet Interface Functionality

- CPCI Serial 3U Board
- Configurable: yes
- Possible in CompactPCI Serial peripheral slot: 1
- Possible Configurations
 - 4 1000Base-T Ethernet interfaces, 4 RJ45 connectors at front, 0°C to +60°C
 - 4 1000Base-T Ethernet interfaces, 4 M12 connectors at front, -40°C to +85°C screened, conformal coating

Ethernet Switch Functionality

- CPCI Serial 3U Board
- Configurable: yes
- Possible in CompactPCI Serial peripheral slot: 1, 2
- Possible Configurations
 - 5-port unmanaged Gigabit Ethernet Switch (4 front ports, 1 rear port) with PoE+ (60 W max), USB PoE management, RJ45, -40°C to +70 (+85)°C with qualified components
 - 4-port unmanaged Gigabit Ethernet Switch with PoE, M12, -40°C to +70 (+85)°C with qualified components, conformal coating

Mass Storage

- CPCI Serial 3U Board
- Configurable: yes
- Possible in CompactPCI Serial peripheral slot: 2, 3, 4, 5, 6
- Possible Configurations
 - Two 2.5" SATA HDD/SSD shuttle, hot swap, RAID 0, 1 JBOD support, -40°C to +85°C with qualified components, conformal coating

Mechanical Specifications

- Dimensions:
 - (W) 210 mm, (D) 225 mm, (H) 175 mm max. without brackets
 - 4U, 40 HP
- Mounting Possibilities
 - Wall-mount
 - Rack-mount in 19" cabinet
 - Two systems side-by-side to build a single 19" chassis

Environmental Specifications

- Temperature range (operation): EN 50155 class TX depending on configuration
 - 0°C to +50°C for high performance passenger information / video distribution systems with PoE and fans
- Temperature range (storage): -40°C to +85°C
- Cooling concept
 - Air-cooled, forced convection with fan tray at system bottom
- Relative humidity (operation): according to EN 60068-2-30, non-condensing
- Relative humidity (storage): according to EN 60068-2-30
- Altitude: -300 m to +3000 m
- Shock: according to EN 61373 category 1 class B
- Vibration: according to EN 61373 category 1 class B
- International Protection Rating (IEC 60529): IP20

Safety

- Electrical Safety
 - EN 60950-1: Class I equipment
- Flammability (PCBs)
 - UL 94 V-0

EMC Conformity

- EN 55022 class B (radiated and conducted emissions)
- EN 55024 (immunity)

Software Support

- Linux
- OpenMediaVault for Network Attached Storage
- Windows Embedded Standard 7 (on request)

Germany

MEN Mikro Elektronik GmbH

Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0

sales@men.de
www.men.de

France

MEN Mikro Elektronik SAS

18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33-450-955-312

sales@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.

860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone 215-542-9575

sales@menmicro.com
www.menmicro.com

China

MEN Mikro Elektronik (Shanghai) Co., Ltd.

Room 808-809, Jiaxing Mansion, No. 877 Dongfang Road
200122 Shanghai
Phone +86-21-5058-0961

sales@men-china.cn
www.men-china.cn

Up-to-date information, documentation and ordering information:
www.men.de/products/mh70s/

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication. MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

© 2017 MEN Holding