

Datasheet

SATADOM-SH 3IE3 V2 series

- iSLC technology
- Built-in Pin 8 power supply
- Best boot drive solution for server and embedded system
- SATA 6Gb/s interface
- High IOPS to reduce boot up timing
- DRAM-less, 100% data integrity
- Innovative Firmware Algorithm
- Anti-vibration mechanical design
- Built in iData Guard



Introduction

Innodisk Serial ATA Disk on Module (SATADOM) supports SATA III standard (6.0Gb/s) interface with excellent performance, and SATADOM-SH 3IE3 V2 is designed as the smallest form factor size that could enhance compatibility with various design applications.

The innovative Pin8 uses the SATA connector itself as a power supply to drive the device without external cables. It could be connected directly to the SATA on-board socket on customers' system without additional power cable. Besides, the booting time for operation and the power consumption is less than hard disk drive (HDD), and can work under harsh environment compile with ATA protocol, no additional drives are required, and the SSD can be configured as a boot device or data storage device.


SATADOM-SH

3IE3 V2 series

Contact us for more information about the SATADOM-SH 3IE3 V2.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Diagram

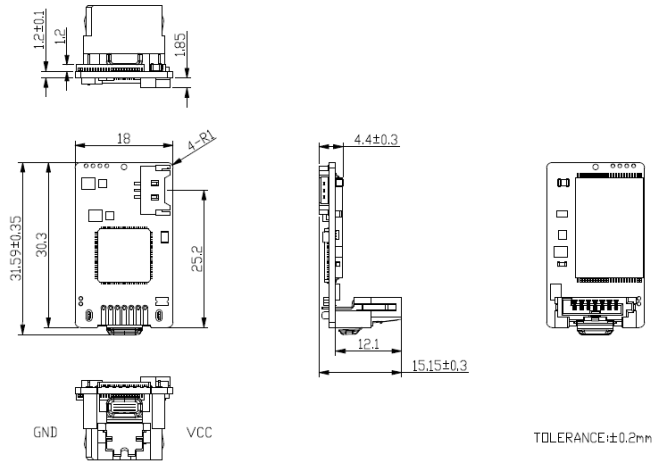

General Tolerance: $\pm 0.2\text{mm}$

Specifications

Interface	SATA III
Flash Type	iSLC
Capacity	8GB~64GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	240 / 160
Max. Power Consumption	1.45 W (5V x 290mA)
Thermal Sensor	WT only
External DRAM buffer	-
H/W Write Protect	-
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	18 X 30.3 X 15.15 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Branch Offices:

USA
usasales@innodisk.com
 +1-510-770-9421

Europe
eusales@innodisk.com
 +31-(0)40-282-1818

Japan
jpsales@innodisk.com
 +81-3-6667-0161

China
sales_cn@innodisk.com
 +86-755-21673689

www.innodisk.com

© 2015 Innodisk Corporation.
 All right reserved. Specifications are subject to change without prior notice.

20160225

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB
Standard Grade (0°C ~ +70°C)	DHSSH-08GD09BC1SCA	DHSSH-16GD09BC1SCA	DHSSH-32GD09BC1SCA	DHSSH-64GD09BCADCA
	DHSSH-08GD09BC1SCB	DHSSH-16GD09BC1SCB	DHSSH-32GD09BC1SCB	DHSSH-64GD09BCADCB
Industrial Grade (-40°C ~ +85°C)	DHSSH-08GD09BW1SCA	DHSSH-16GD09BW1SCA	DHSSH-32GD09BW1SCA	DHSSH-64GD09BWADCA
	DHSSH-08GD09BW1SCB	DHSSH-16GD09BW1SCB	DHSSH-32GD09BW1SCB	DHSSH-64GD09BWADCB

*PN end with A: Pin8+ power cable / B: Pin8+ Pin 7

innodisk

www.innodisk.com