

# Embedded System

## LIGHT Series



LIGHT Chassis without top-cover



M/B information: ( Please refer to M/B specification )

| M/B Model | Description                                               | CF   | HDD  |
|-----------|-----------------------------------------------------------|------|------|
| CV700A    | 3 LAN                                                     | 60°C | 40°C |
| CV700C    | 4 COM Ports                                               | 60°C | 40°C |
| CV763A    | 2 PCMCIA Slot / 4 LAN                                     | 60°C | 40°C |
| MV700A    | Twin-view / Video-in                                      | 60°C | 45°C |
| CI852A    | 4 LAN                                                     | 60°C | 45°C |
| CI852C    | 4 COM ports                                               | 60°C | 45°C |
| SI852A    | 4~16 Video-in                                             | 60°C | 45°C |
| MI853AW   | 2 IEEE1394 / DVI / TV-Out / Wide range DC-IN              | 60°C | 45°C |
| CI270CW   | 4 COM ports / LVDS / DVI / Wide range DC-IN               | 55°C | 45°C |
| MI270AW   | 2 COM ports / LVDS / TV-Out / Wide range DC-IN / Video-in | 55°C | 45°C |


### Application :

Thin Client, Network device, Set-Top Box, VPN, VOIP and POS system

### Technical Data :

- Dimension 48.5 H x 234 W x 175 D mm
- Material Aluminum + Plastic ( Silver Cover )
- Color Blue / Silver
- Weight 1 Kgs ( Incl. M/B )
- Storage Space 1 x 2.5" HDD
- LED Light Power / Network / HDD
- Front Connector 1 x USB, Mic-in, Lin-out

### Dimension

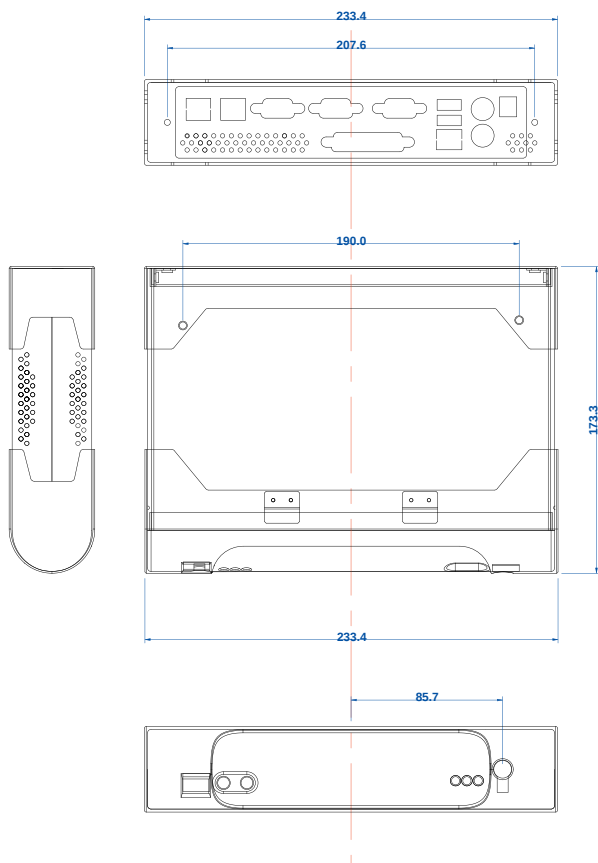

### Optional Module

- Wireless Lan Chip: RALINK / VIA, MINI PCI Interface, 802.11g Standard  
Driver: Win98, ME, 2K, XP, Linux, 128bit WEP Encryption Support
- 56K Modem ( CX ) Chip: Conexant, USB Interface, Driver: Win98,ME,2K,XP,Linux
- ADSL Chip: Conexant, ANSI T1.413 Issue 2  
ITU-T G.992 ( G.dmt ) and G.992.2 ( G.lite ) Annex A,B.  
Driver: Win98, ME, 2K, XP, Linux

### Optional Accessory :

- Wall mount kit

Wall mount kit



Wireless Lan

