

HOMELAND SECURITY MILITARY C3I COMMAND CENTER



VISUALIZATION SYSTEMS

DISPLAY WALL SERIES

3 x 3 x 46" **DEPLOYABLE LCD DISPLAY WALL**



138"

Key Features

138" screen of 18 mega pixels

10' fast, easy and secure assembling

Ready to use in 30'

Transportable in weatherproof cases

Can be installed on uneven ground up to 5% incline

Temporary indoor and field installations

Patented system

Emission security TEMPEST standards:

- ▶ NATO SDIP-27 Level A
- USA NSTISSAM Level 1

TRANSPORTABLE INFORMATION OVERVIEW SYSTEM

Today's critical field operations rely on visualization to monitor and make tactical decisions IRTS 3 x 3 deployable LCD display wall is a COTS field-proven system for worldwide Army forces requirements and is used by French Armed Forces. Mobile and transportable anywhere it produces reliable picture in any location, whether it is a temporary installation in a building, in a shelter or a soft-top cover - such as a field command post or an inflatable tent.

Multiple feeds of information onto multiple displays

The 3 x 3 IRTS display wall is the ideal monitoring and decision-making support tool: Ergonomic and easy to assemble, it can be installed on uneven ground keeping though a consistent sound & image quality.

IRTS 46" monitors near-seamless 3 x 3 LCD display wall is an energy and cost efficient package.

With its specific features, IRTS Rugged 46" Thin Edge - R46TE - monitor is specifically designed for a deployable video wall.

IRTS is constantly striving to promote innovation and respond to market challenges, while maintaining its prices at a competitive level.

See also the IRTS' 2 x 2 and 2 x 3 LCD display walls and R46TE 46" LCD monitor.

WWW.IRTS-DISPLAYWALL.COM



PRODUCT SPECIFICATIONS

		3 x 3 Mobile	Wall				
Main Fea	tures				46" monitor		
	Diagonal Size	138"	Dot	pitch	0.53025 mm (H), 0.53025 mm (V)		
Display area	Dimensions	3054 (H) x 1717 (V) mr	m Vie v	wing angles	178° (H) / 178° (V)		
	Resolution	5760 x 3240	Res	ponse time	8 ms		
	Screen ratio	16:9	Con	trast ratio	3500 : 1		
	Brightness	450 cd/m ²	Display color 8 bit - 16.7 I		8 bit - 16.7 M		
Display wall controller	Video outputs				O) display ports		
		1 x Full HD (1920 x 1080) DVI local display port					
	Video inputs 10 x DVI Full HD (1920 x 1080) display ports						
	1 x composite						
Audio	1 x 60 W equalizer 1 x microphone 1 x anti-larsen box 2 x speakers				·		
	1 x RCA inputs						
Dedicated workstation		9 x Full HD (1920 x 1080) video display outputs					
Deutcateu workstation		9 X Full H			Julpuis		
Software	Wall Control Red (Datapath) ACM (Samsung) Advanced Color Management						
0	, -7						
Operating system	Windows 7 secured configuration 2011-094684/DGA MI/DT/SSI/IPS/AI/NC						
Electrical features	230 V, 1400 W max consumption						
	nal configuration						
9 x IRTS R46TE 46" monitors	1 x sound equipment (60 W-amplifier equalizer + microphone + speakers)						
1 x monitors' lifting mechanism							
1 x media server + 24 Taptop + 1 x dedicated workstation, 9 act	keyboard + mouse + soft keyboard 1 x connecting cables bundle						
Structure		is outputs					
Structure	1 x mechanized support	structure					
Elevator	4 x ground stabilizers (+ front protected)						
	Small foot print 1036 x 1460 mm						
Controls	Up & down button for e						
	Adjustable						
	Min. height at top of display wall : 2517 mm Max. height at top of display wall : 2970 mm						
Display v	vall controller DATAPATH VSN 970						
	3 x Image DP4: 9 x display port video output connectors						
Graphic cards	2 x Quadri Capture Vision HD4: 8 x DVI video input connectors						
	1 x Capture Vision HV-HD: 2 x DVI video outputs + composite video input connectors						
Hard drive	2 x Western Digital RED 750						
Mother board connectors	Back: 2 x USB 3.0, 2 x USB 2.0, 1 x DVI-D, Front: 2 x USB 3.0						
Electrical features	230 V, 550 W consumption						
	445 x 410 x 182 mm, 22 kg, aluminum, black						
-	G C						
,	Windows 7 Pro 64 0EM, Secure Computer System						
Options	H. I. 40 I I' I						
Controller	Up to 16 captures display wall controller configuration						
	700 cd/m² brightness, 24/7 operating monitor						
	nental Conditions						
Vibrations	Specific transport case						
Shocks	Specific transport case						
Humidity	30 to 80%						
-							
	+ 5° to + 35° C						
Storage temperature							
Warranty		ad warrants (seeks as 4111)	footow:	ndox DAAA	adius.		
	Two-year limited warranty (parts and labor), factory return under RMA procedure. Additional 2-year coverage and customized service plans available on request.						
Additional 2-year coverage and customized service plans available on request.							



639 Boulevard des Armaris = 83100 Toulon = France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01 —

IRTS NATO CODE: FAAJ7

Contact : sales@irts.fr • www.irts-displaywall.com




PATENTED ASSEMBLY PROCESS

Combined with its D-LED DID technology, its 1.8 mm edges and 5.5 mm bezel-to-bezel width, the R46TE monitor offers a wide and uniform picture. Display effectiveness is maximized, making any information perfectly readable to any attendance.

IRTS Rugged 46" Thin Edge - R46TE - monitor is specifically designed to be mounted in a video wall. The rear side of the monitor integrates three twist locks (A), two carrying handles (B), as well as written handling instructions to make assembling & disassembling safe and easy.



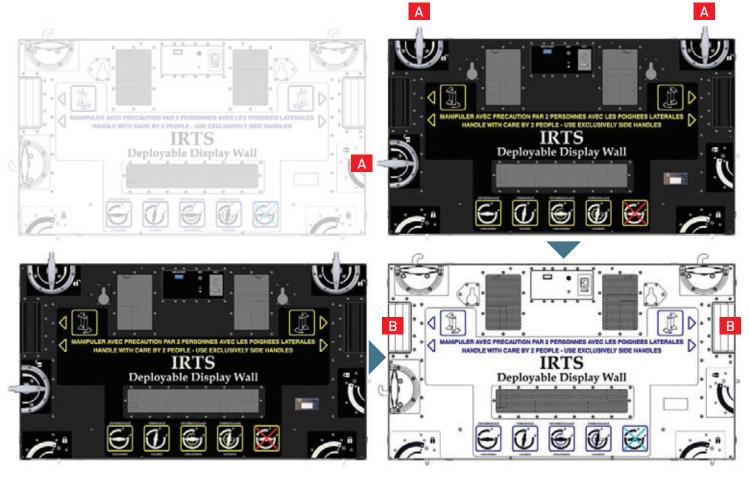



Monitors are secured together by means of locking hooks.



The 3 twist locks enable to lock the monitor into position or release it from the structure.

IRTS' patented shock absorbers protect the monitor from being damaged when assembling the wall.





В

A 90° rotation enables to stick the handles out, so 2 persons can carry the monitor.



IRTS


639 Boulevard des Armaris = 83100 Toulon = France Tel.: +33 (0)4 94 20 78 00 = Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE: FAAJ7

Contact : sales@irts.fr • www.irts-displaywall.com


VIDEO WALL SYSTEM DESCRIPTION



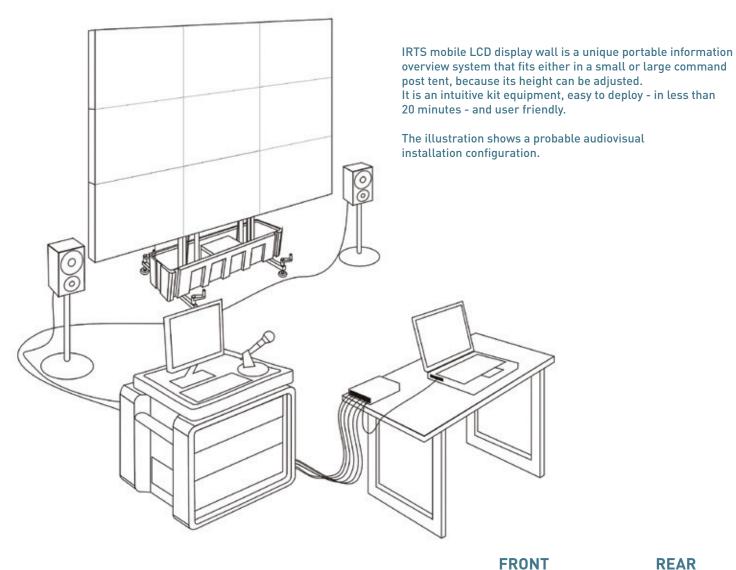

The LCD display wall package is a full audio-visual system. Its display controller case consists of :

- Display controller to enable audio and video cabling,
- Sound amplifier & speakers as well as anti-feedback (Larsen) equipment,
- Integrity of your data and equipment is ensured by an integrated UPS,
- → 3 x 3 LCD wall offers extended video display outputs via a dedicated workstation.



A computer connection enables to drive the controller through a KMV - keyboard, video (monitor) and mouse.

A programmable keyboard - soft keyboard - enables recovering any memorized scenario, and using it at the press of a key. Scenarios are based on a selection of 11 captures displayed on the wall that can be combined at will. Every piece of data is transferred through cable connection, ensuring therefore full confidentiality - as opposed to wireless communication - of the transmission.



IRTS


639 Boulevard des Armaris = 83100 Toulon = France Tel.: +33 (0)4 94 20 78 00 = Fax : +33 (0)4 94 20 78 01 -

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr • www.irts-displaywall.com

PRODUCT DESIGN



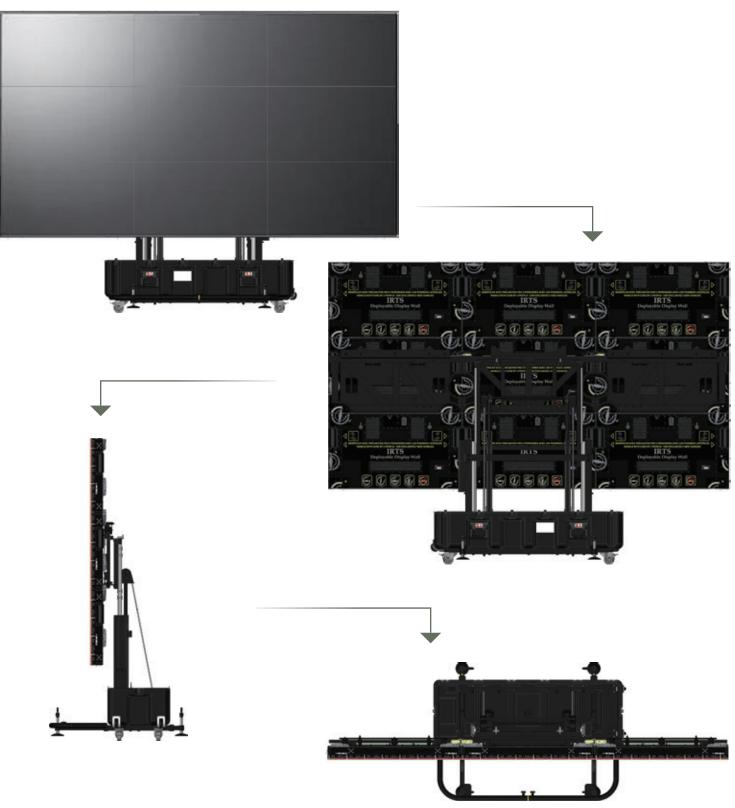



IRTS


639 Boulevard des Armaris = 83100 Toulon = France Tel.: +33 (0)4 94 20 78 00 = Fax : +33 (0)4 94 20 78 01 —

IRTS NATO CODE : FAAJ7
Contact : sales@irts.fr • www.irts-displaywall.com

DIMENSIONS, HEIGHT ADJUSTMENT & SPACE REQUIREMENT



Dimensions are in meters (m).

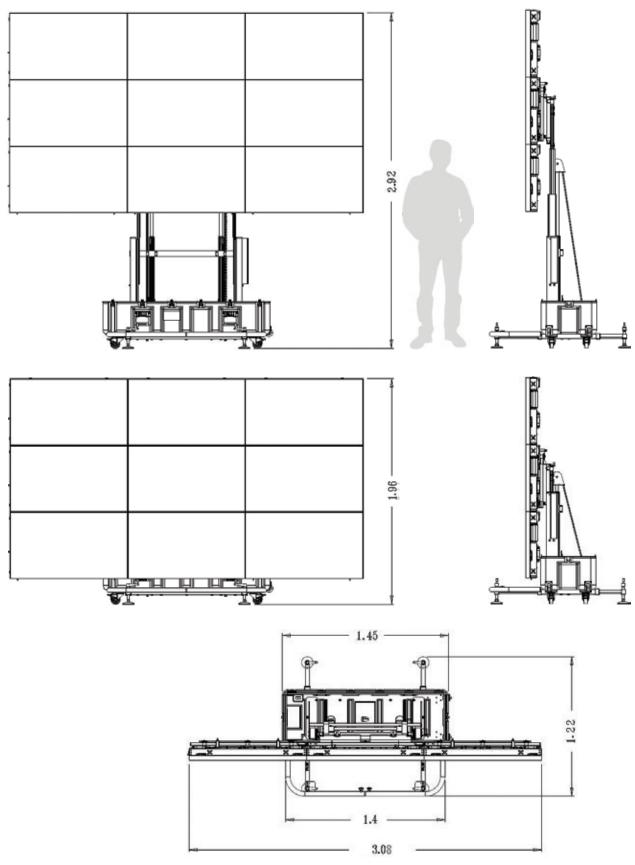



639 Boulevard des Armaris • 83100 Toulon • France

Tel.: +33 (0)4 94 20 78 00 • Fax: +33 (0)4 94 20 78 01 -

IRTS NATO CODE: FAAJ7

Contact : sales@irts.fr • www.irts-displaywall.com



MOBILITY / TRANSPORT

Transportable, the 46" monitors 3 x 3 wall can be installed by only two persons.

The 9 monitors, support frame, display wall controller, computer and accessories are carried in 11 specific cases, labeled for chronological order of assembly:

	Cases (11)				
	1 x Large case				
Dimensions	1161 x 479 x 954 mm	3x3 1/11			
Weight	< 100 Kg	3x3 1/411			
Contents	Support frame lifting mechanism	3×3 2/11 3×3 3/11			
	1 x Large case	3x3 4/11			
Dimensions	1161 x 479 x 954 mm				
Weight	< 100 kg				
Contents	Support frame lifting mechanism accessories	3x3 5/11			
	5 x Large cases	3x3 6/11			
Dimensions	1161 x 479 x 954 mm each	3x3 0/11			
Weight	< 100 Kg each	7/11			
Contents	9 x 46" monitors	3x3 4/411			
Contents	1/2 support frame				
	1 x 8U case				
Dimensions	750 x 702 x 572 mm				
Weight	80 kg				
	Controller 8/11	3x3 8/11	Ш П Ш		
Contents	Secured back panel with silk printed identified connections		A S		
Contents	Rackmounted audio amplifier with 3 inputs				
	Rackmounted 1000 VA UPS				
	3 x Reinforced cases	3x3 9/11			
Dimensions	794 x 615 x 444 mm each	3x3 5711			
Weight	< 50 kg each	3x3 10/11			
	1 x Accessories; 4-deck moulded w/ wheels and handles	3x3			
Contents	1 x Dedicated workstation - PC, monitor, keyboard, mouse	3x3 11/11			
	1 x Cables w/ wheels and handles	3x3			
	Total weight				
< 930 kg	< 2050 lb				
	Total volume / surface area				
20-foot container	3500 (w) x 1900 (d) x 1000 (h) mm / 6.65 m² (71,5 ft²)				



TRANSPORT CASES CONFIGURATION

Basic 3x3 configuration: 11 cases





ILS 3x3 configuration: 2 additional cases





639 Boulevard des Armaris • 83100 Toulon • France Tel.: +33 (0)4 94 20 78 00 • Fax: +33 (0)4 94 20 78 01 -

IRTS NATO CODE: FAAJ7

Contact: sales@irts.fr • www.irts-displaywall.com

WALL OF FAME





IRTS is proud to support the French armed forces in every theater of operations where they are involved to ensure national security and our safety as well as to participate in peacekeeping operations.







SICF







IRTS

639 Boulevard des Armaris = 83100 Toulon = France Tel.: +33 (0)4 94 20 78 00 = Fax : +33 (0)4 94 20 78 01 —

IRTS NATO CODE: FAAJ7

Contact : sales@irts.fr • www.irts-displaywall.com