




HOMELAND SECURITY
MILITARY C3I
COMMAND CENTER



VISUALIZATION SYSTEMS

DISPLAY WALL SERIES

2 x 2 x 46" DEPLOYABLE LCD DISPLAY WALL

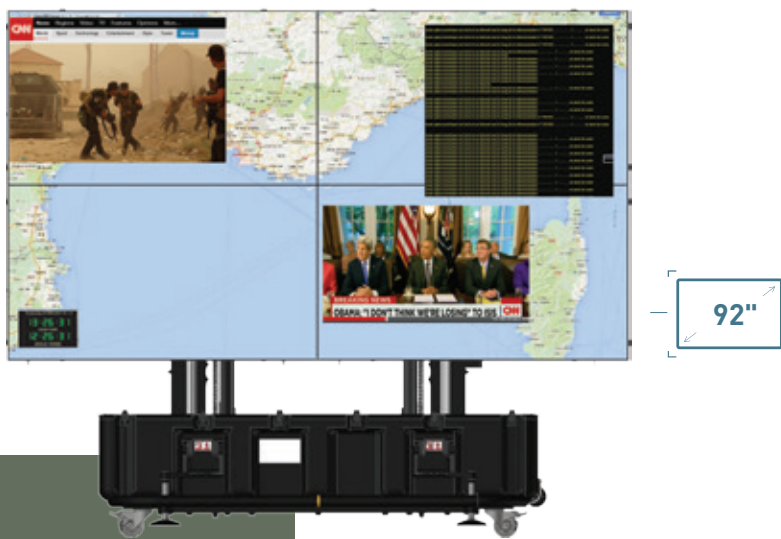

Key Features

- 92" screen of 8 mega pixels
- 10' fast, easy and secure assembling
- Ready to use in 30'
- Transportable in weather-proof cases
- Can be installed on uneven ground up to 5% incline
- Temporary indoor and field installations
- Patented system
- Emission security
TEMPEST standards:
 - ▶ NATO SDIP-27 Level A
 - ▶ USA NSTISSAM Level 1

TRANSPORTABLE INFORMATION OVERVIEW SYSTEM

Today's critical field operations rely on visualization to monitor and make tactical decisions IRTS 2 x 2 deployable LCD display wall is a COTS field-proven system for worldwide Army forces requirements and is used by **French Armed Forces**. Mobile and transportable anywhere it produces reliable picture in any location, whether it is a temporary installation in a building, in a shelter or a soft-top cover - such as a field command post or an inflatable tent.

Multiple feeds of information onto multiple displays

The 2 x 2 IRTS display wall is the ideal monitoring and decision-making support tool : Ergonomic and easy to assemble, it can be installed on uneven ground keeping though a consistent sound & image quality.

IRTS 46" monitors near-seamless 2 x 2 LCD display wall is an energy and cost efficient entry level package.

With its specific features, IRTS Rugged 46" Thin Edge - **R46TE** - monitor is specifically designed for a deployable video wall.

IRTS is constantly striving to promote innovation and respond to market challenges, while maintaining its prices at a competitive level.

See also the IRTS' 2 x 3 and 3 x 3 LCD display walls and R46TE 46" LCD monitor.

PRODUCT SPECIFICATIONS

2 x 2 Mobile Wall				
Main Features		46" monitor		
Display area	Diagonal Size	92"	Dot pitch	0.53025 mm (H), 0.53025 mm (V)
	Dimensions	2036 (H) x 1145 (V) mm	Viewing angles	178° (H) / 178° (V)
	Resolution	3840 x 2160	Response time	8 ms
	Screen ratio	16:9	Contrast ratio	3500 : 1
	Brightness	450 cd/m²	Display color	8 bit - 16.7 M
Display wall controller	Video outputs	4 x Full HD (1920 x 1080) display ports		
		1 x Full HD (1920 x 1080) DVI local display port		
	Video inputs	10 x DVI Full HD (1920 x 1080) display ports		
		10 x DVI Full HD (1920 x 1080) display ports		
Audio	1 x 60 W equalizer		1 x microphone	
	1 x anti-larsen box		2 x speakers	
	1 x RCA inputs			
Virtual desktop converter	4 x Full HD (1920 x 1080) video display outputs			
Software	Wall Control Red (Datapath)			
	ACM (Samsung) Advanced Color Management			
Operating system	Windows 7 secured configuration 2011-094684/DGA MI/DT/SSI/IPS/AI/NC			
Electrical features	230 V, 1200 W max consumption			
Operational configuration				
4 x 46" monitors			1 x sound equipment (60 W-amplifier equalizer + microphone + speakers)	
1 x monitors' lifting mechanism support frame			1 x UPS	
1 x media server + 24" laptop + keyboard + mouse + soft keyboard			1 x connecting cables bundle	
1 x virtual desktop converter connected to a client PC's PCIe = 4 video display ports outputs				
Structure				
Elevator	1 x mechanized support structure			
	4 x ground stabilizers (+ front protected)			
	Small foot print 1036 x 1460 mm			
Controls	Up & down button for elevator engine			
Height	Adjustable			
	Min. height at top of display wall : 1950 mm			
	Max. height at top of display wall : 2970 mm			
Display wall controller		DATAPATH VSN 970		
Graphic cards	1 x Image DP4: 4 x display port video output connectors			
	2 x Quadri Capture Vision HD4: 8 x DVI video input connectors			
	1 x Capture Vision HV-HD: 2 x DVI video outputs + composite video input connectors			
Hard drive	2 x Western Digital RED 750			
Mother board connectors	Back: 2 x USB 3.0, 2 x USB 2.0, 1 x DVI-D, Front: 2 x USB 3.0			
Electrical features	230 V, 500 W consumption			
Physical features	445 x 410 x 182 mm, 22 kg, aluminum, black			
Operating system	Windows 7 Pro 64 OEM, Secure Computer System			
Options				
Controller	Up to 16 captures display wall controller configuration			
Configuration	Upgrade kit to 2x3 or 3x3 display wall			
Brightness	700 cd/m² brightness, 24/7 operating monitor			
Environmental Conditions				
Vibrations	Specific transport case			
Shocks	Specific transport case			
Humidity	30 to 80%			
Ingress Protection	IP50			
Operating temperature	+ 5° to + 35° C			
Storage temperature	- 20° to + 49° C			
Warranty				
Two-year limited warranty (parts and labor), factory return under RMA procedure.				
Additional 2-year coverage and customized service plans available on request.				



IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ■ www.irts-displaywall.com


RUGGED DISPLAYS & COMPUTERS

PATENTED ASSEMBLY PROCESS

Combined with its D-LED DID technology, its 1.8 mm edges and 5.5 mm bezel-to-bezel width, the R46TE monitor offers a wide and uniform picture. Display effectiveness is maximized, making any information perfectly readable to any attendance.

IRTS Rugged 46" Thin Edge - R46TE - monitor is specifically designed to be mounted in a video wall. The rear side of the monitor integrates three twist locks (A), two carrying handles (B), as well as written handling instructions to make assembling & disassembling safe and easy.

46"

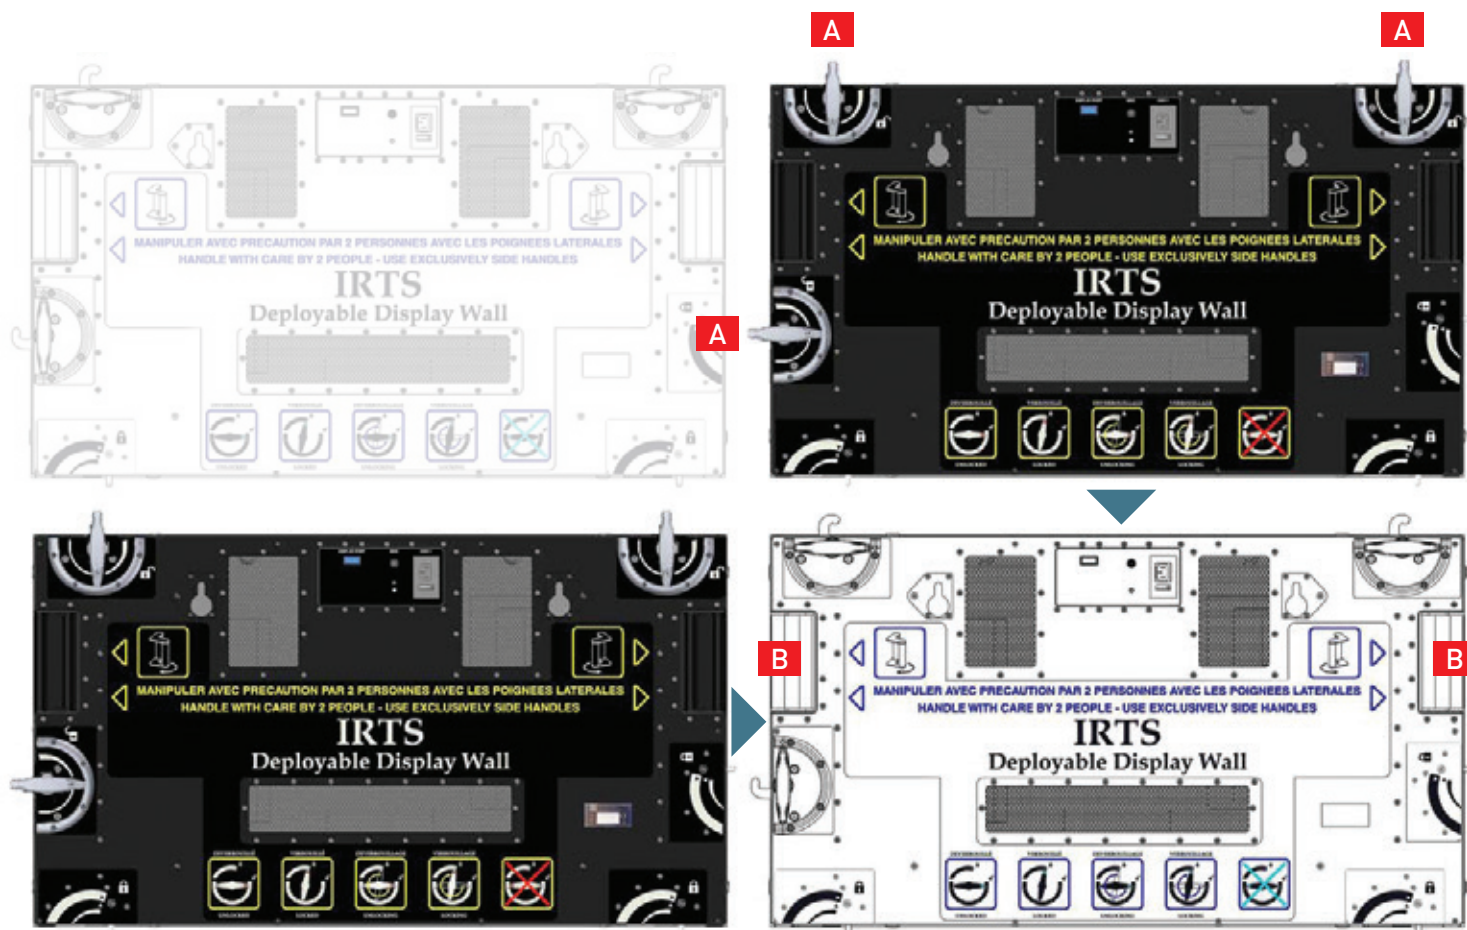


Monitors are secured together by means of locking hooks.

A


The 3 twist locks enable to lock the monitor into position or release it from the structure.

IRTS' patented shock absorbers protect the monitor from being damaged when assembling the wall.

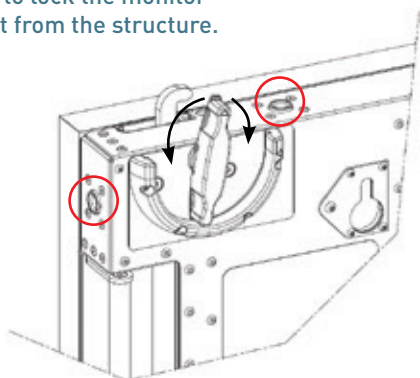

B

A 90° rotation enables to stick the handles out, so 2 persons can carry the monitor.

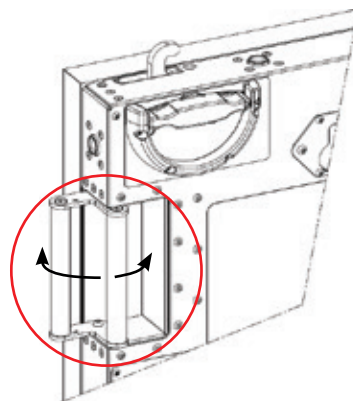

IRTS

639 Boulevard des Armaris ▪ 83100 Toulon ▪ France


Tel.: +33 (0)4 94 20 78 00 ▪ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ▪ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS

VIDEO WALL SYSTEM DESCRIPTION

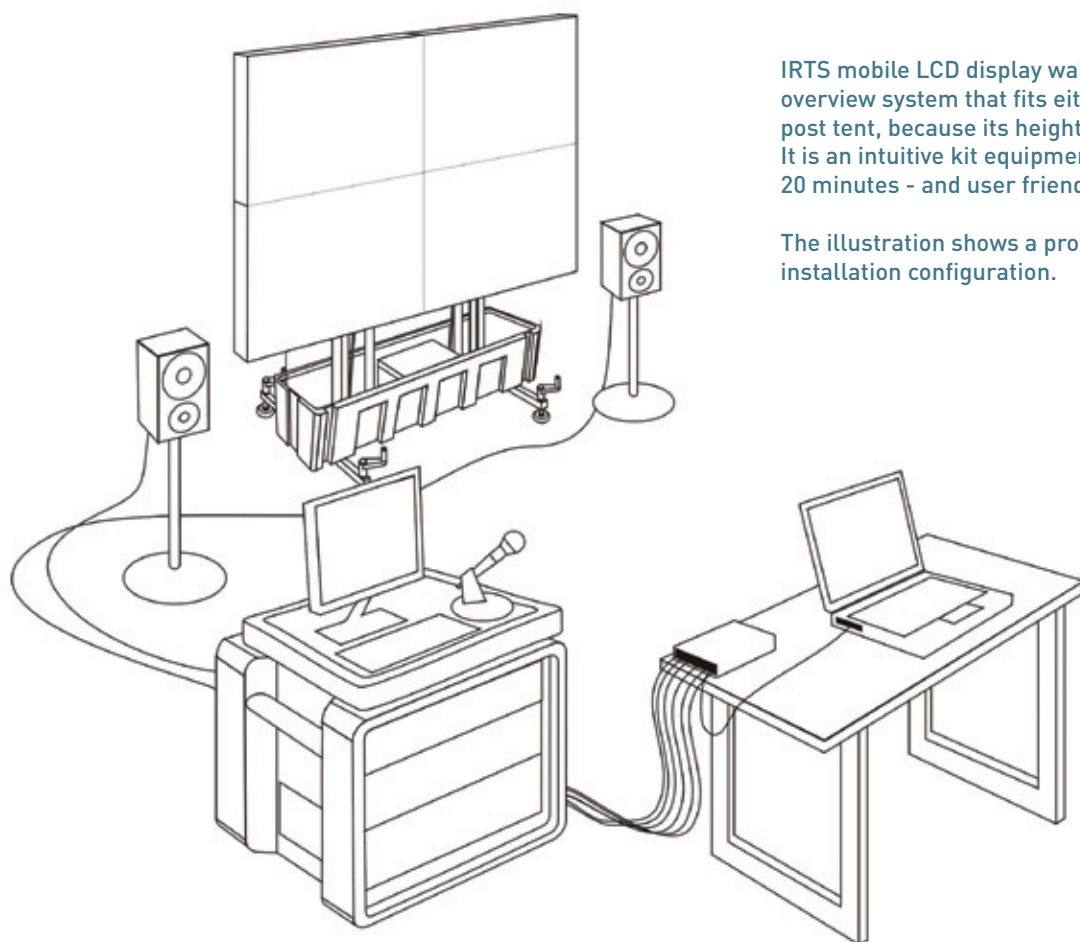

IRTS mobile LCD display wall is a unique portable information overview system that fits either in a small or large command post tent, because its height can be adjusted. It is an intuitive kit equipment, easy to deploy - in less than 20 minutes - and user friendly.

The illustration shows a probable audiovisual installation configuration.


The LCD display wall package is a full audio-visual system. Its display controller case consists of :

- › Display **controller** to enable audio and video cabling,
- › Sound **amplifier** & speakers as well as anti-feedback - Larsen - equipment,
- › Integrity of your data and equipment is ensured by an integrated **UPS**.



FRONT

REAR

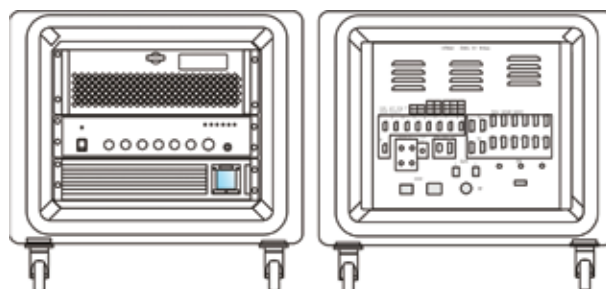

A programmable keyboard - soft keyboard - enables recovering any memorized scenario, and using it at the press of a key.

Scenarios are based on a selection of 11 captures displayed on the wall that can be combined at will.

Every piece of data is transferred through cable connection, ensuring therefore full confidentiality - as opposed to wireless communication - of the transmission.



IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France


Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ■ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS

PRODUCT DESIGN

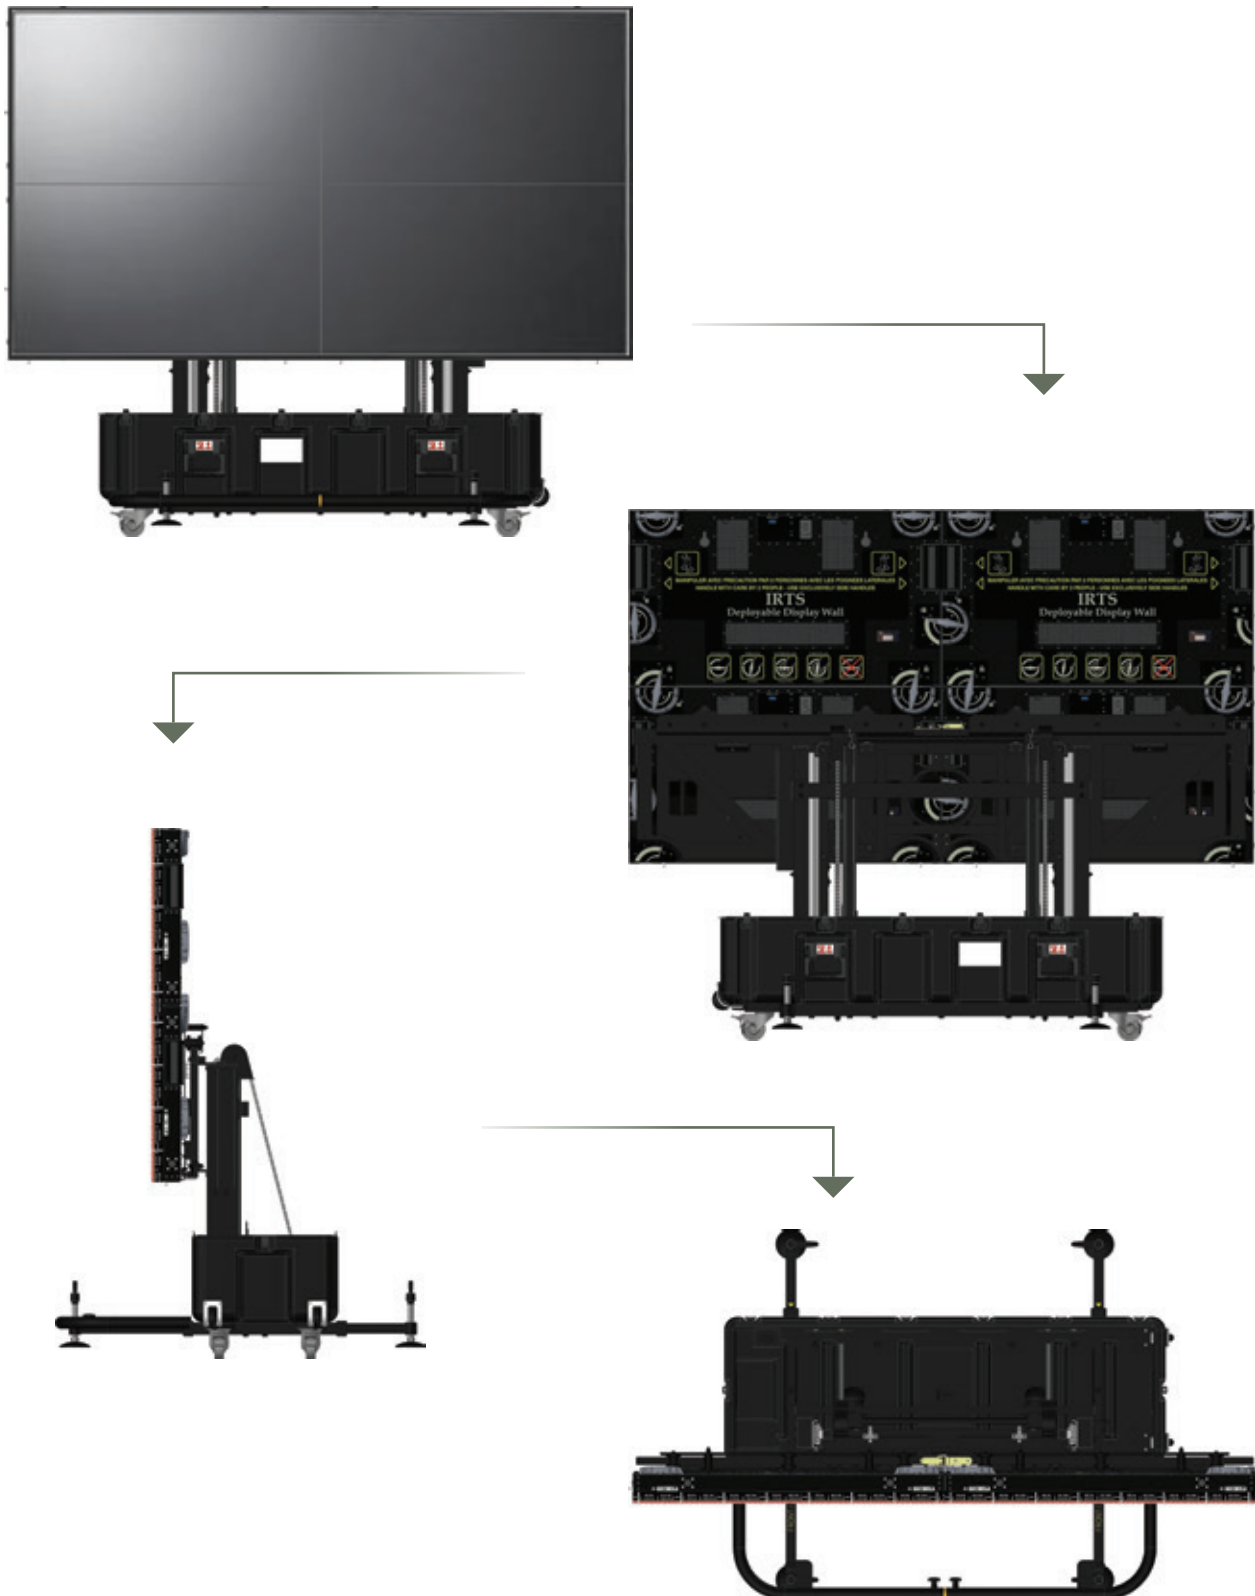

IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01


IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ■ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS

DIMENSIONS, HEIGHT ADJUSTMENT & SPACE REQUIREMENT

Dimensions are in meters (m).

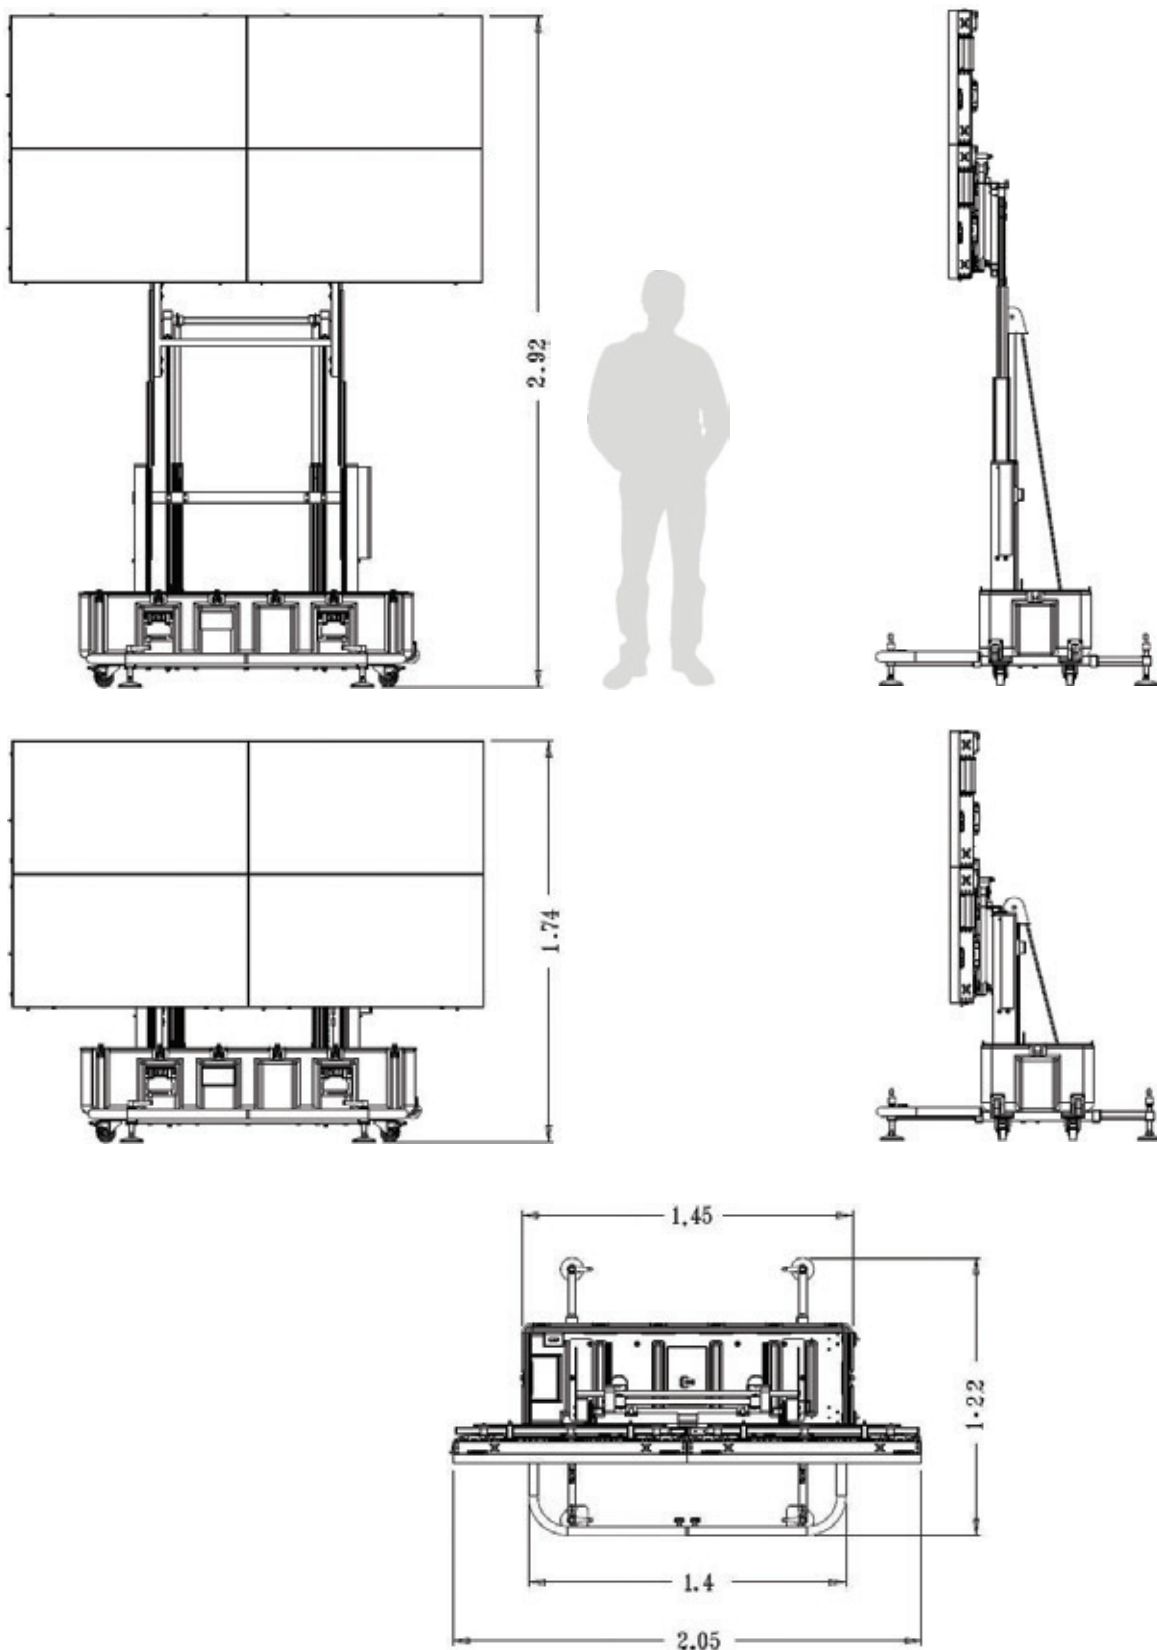

IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7




Contact : sales@irts.fr ■ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS

MOBILITY / TRANSPORT

Transportable, the 46" monitors 2 x 2 wall can be installed by only two persons.

The 4 monitors, support frame, display wall controller and accessories are carried in seven specific cases, labeled for chronological order of assembly :

Cases (7)			
1 x Large case		<div><div><div><div>2x2</div><div>1/7</div></div></div><div><div><div>2x2</div><div>2/7</div></div></div><div><div><div>2x2</div><div>3/7</div></div></div><div><div><div>2x2</div><div>4/7</div></div></div></div>	
Dimensions	1161 x 479 x 954 mm		
Weight	< 100 Kg		
Contents	Support frame lifting mechanism		
1 x Large case			
Dimensions	1161 x 479 x 954 mm		
Weight	< 100 kg		
Contents	Support frame lifting mechanism accessories		
2 x Large cases			
Dimensions	1161 x 479 x 954 mm each		
Weight	< 100 Kg each		
Contents	2 x 46" monitors		
1 x 8U case		<div><div><div>2x2</div><div>5/7</div></div></div>	
Dimensions	750 x 702 x 572 mm		
Weight	80 kg		
Contents	Controller		
	Secured back panel with silk printed identified connections		
	Rackmounted audio amplifier with 3 inputs		
	Rackmounted 1000 VA UPS		
2 x Reinforced cases		<div><div><div>2x2</div><div>6/7</div></div></div> <div><div><div>2x2</div><div>7/7</div></div></div>	
Dimensions	794 x 615 x 444 mm each		
Weight	< 50 kg each		
Contents	1 x Accessories : 4-deck moulded case		
	1 x Cables		
Total weight			
< 580 kg	< 1280 lb		
Total volume / surface area			
20-foot container	2000 (w) x 1900 (d) x 1000 (h) mm / 3.8 m² (41 ft²)		

TRANSPORT CASES CONFIGURATION

Basic 2x2 configuration : 7 cases



ILS 2x2 configuration : 1 additional case



IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ■ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS

WALL OF FAME



IRTS is proud to support the French armed forces in every theater of operations where they are involved to ensure national security and our safety as well as to participate in peacekeeping operations.



SICF



IRTS

639 Boulevard des Armaris ■ 83100 Toulon ■ France

Tel.: +33 (0)4 94 20 78 00 ■ Fax : +33 (0)4 94 20 78 01

IRTS NATO CODE : FAAJ7

Contact : sales@irts.fr ■ www.irts-displaywall.com

RUGGED DISPLAYS & COMPUTERS