

# LCD Video Wall


Create an almost seamless image by minimizing image gap up to 3.5mm.  
Orion's accumulated and reliable video wall technology over 10 years are ideal for realizing stable video wall digital signage.

46" 55"

NxN



## Ultra Narrow Bezel

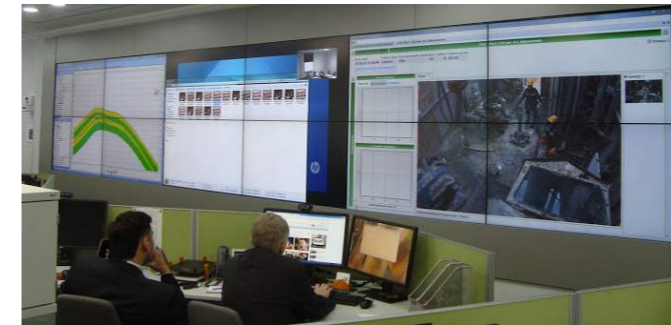


### Specification

Product Name		UNB			
Panel Type		VA		IPS	
Model Name		OLMU-4620S	OLMU-4650S	OLMU-5520S	OLMU-5550S
Back Light Type		LED			
Active Display Area		1018.08 x 572.67 mm		1209.6 x 680.4 mm	
Ratio		16 : 9			
Resolution		1920(H) x 1080(V)			
Pixel Pitch(H x V)		0.53025 x 0.53025		0.63 x 0.63	
Display Colors		16.7M(8bit)		1.06 Billion(10Bit)	
Luminance of White(Typ.)		500 cd / m <sup>2</sup>	700 cd/m <sup>2</sup>	500 cd / m <sup>2</sup>	700 cd / m <sup>2</sup>
Contrast Ratio (Typ.)		3,500 : 1		1,400 : 1	
Lamp Life Time		Min. 50,000Hrs		Min. 60,000Hrs	
Bezel (R/L/U/D mm)		3.5 mm			
AC Input Voltage		100V~240V 50/60hz			
Power Consumption	Max	120W	170W	200W	270W
	Typical	115W	145W	115W	150W
	Stand-By	≤ 0.5 W			
Surface Treatment		Haze 44% / 3H		Haze 10%, Anti-glare Hard-Coating (3H)	Haze 44%, Anti-glare Hard-Coating (3H)
Mount		600 x 400(VESA)			
Dimension (W x H x D mm)		1022 x 578.6 x 99.8		1213.4 x 684.2 x 100.4	1213.5 x 684.3 x 99.8
Weight		23 ± 0.5 kg		32Kg (±0.5Kg)	
Input Video Signal		DVI X1, PC X 1, HDMI X2, DP X1			
Control		RS-232C, LAN, I/R, Key Pad			

### External Dimension

OLMU-4620S/4650S

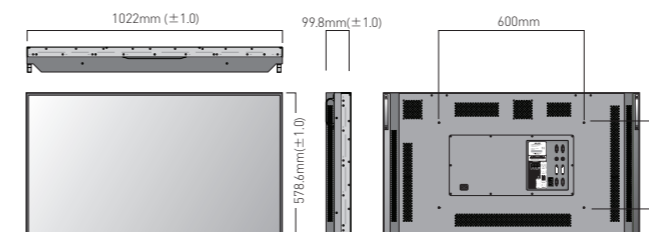

OLMU-5520S/5550S

