

G20 – 3U CompactPCI® Serial Intel® Core™ i7 CPU Board

- Intel® Core™ i7, 2.53 GHz
- Dual-core 64-bit processor
- PICMG CPCI-S.0 CompactPCI® Serial
- Up to 4 GB DDR3 DRAM soldered, ECC
- mSATA and microSD™ card slots
- Standard front I/O: 2 DisplayPorts, 2 Gb Ethernet, 2 USB
- Standard rear I/O: 7 PCIe®, 8 USB, 6 SATA, DisplayPort®/HDMI
- Rear I/O via mezzanine board: up to 8 Gigabit Ethernet
- Intel® Turbo Boost 2.53..3.2 GHz, Hyper-Threading, Active Management Technology
- Open CL 1.1 support



The G20 is a versatile 4HP/3U single-board computer supporting a multitude of modern serial interfaces according to the CompactPCI® Serial standard. It is thus perfectly suited for data-intensive applications which require high computing-power. The CPU card is equipped with Intel®'s Core i7 processor running at up to 3.2 GHz maximum turbo frequency and offering multi-core architecture from Intel® with full 64-bit support. The G20 supports the Intel® Active Management technology which makes it possible to access the board via the network even when it is in soft-off or standby state.

The memory configuration of the G20 includes a state-of-the-art fast DDR3 DRAM which is soldered to the board to guarantee optimum shock and vibration resistance. An mSATA disk connected via a SATA channel and a microSD™ card device which is connected via a USB interface offer nearly unlimited space for user applications.

The board delivers an excellent graphics performance. Two DisplayPort® interfaces are accessible at the board front. Using an external adapter two HDMI or two DVI ports can also be realized. In addition the standard front I/O comprises two PCIe®-driven Gigabit Ethernet and two USB 2.0 ports.

Serial interfaces at the rear I/O connectors are 8 USB, 6 SATA interfaces, one DisplayPort® or HDMI (instead of one interface at the front panel), 5 PCI Express® x1 links, and two PEG x8 links. Up to eight Gigabit Ethernet interfaces can be realized using a [rear I/O adapter board](#).


Thermal supervision of the processor and a watchdog for the operating system complete the functionality of the G20.

The G20 operates in Windows® and Linux environments as well as under real-time operating systems that support Intel®'s multi-core architecture. The InsydeH2O™ EFI BIOS was specially designed for embedded system applications.

The G20 is suited for a wide range of industrial applications, e.g. for monitoring, vision and control systems as well as test and measurement. Main target markets comprise industrial automation, multimedia, traffic and transportation, aerospace, shipbuilding, medical engineering and robotics.

The G20 comes with a tailored passive heat sink within 4 HP height. The robust design of the G20 makes the board especially suited for use in rugged environments with regard to shock and vibration according to applicable DIN, EN or IEC industry standards. The G20 is also ready for coating so that it can be used in humid and dusty environments and has a guaranteed minimum standard availability of 7 years.

Diagram

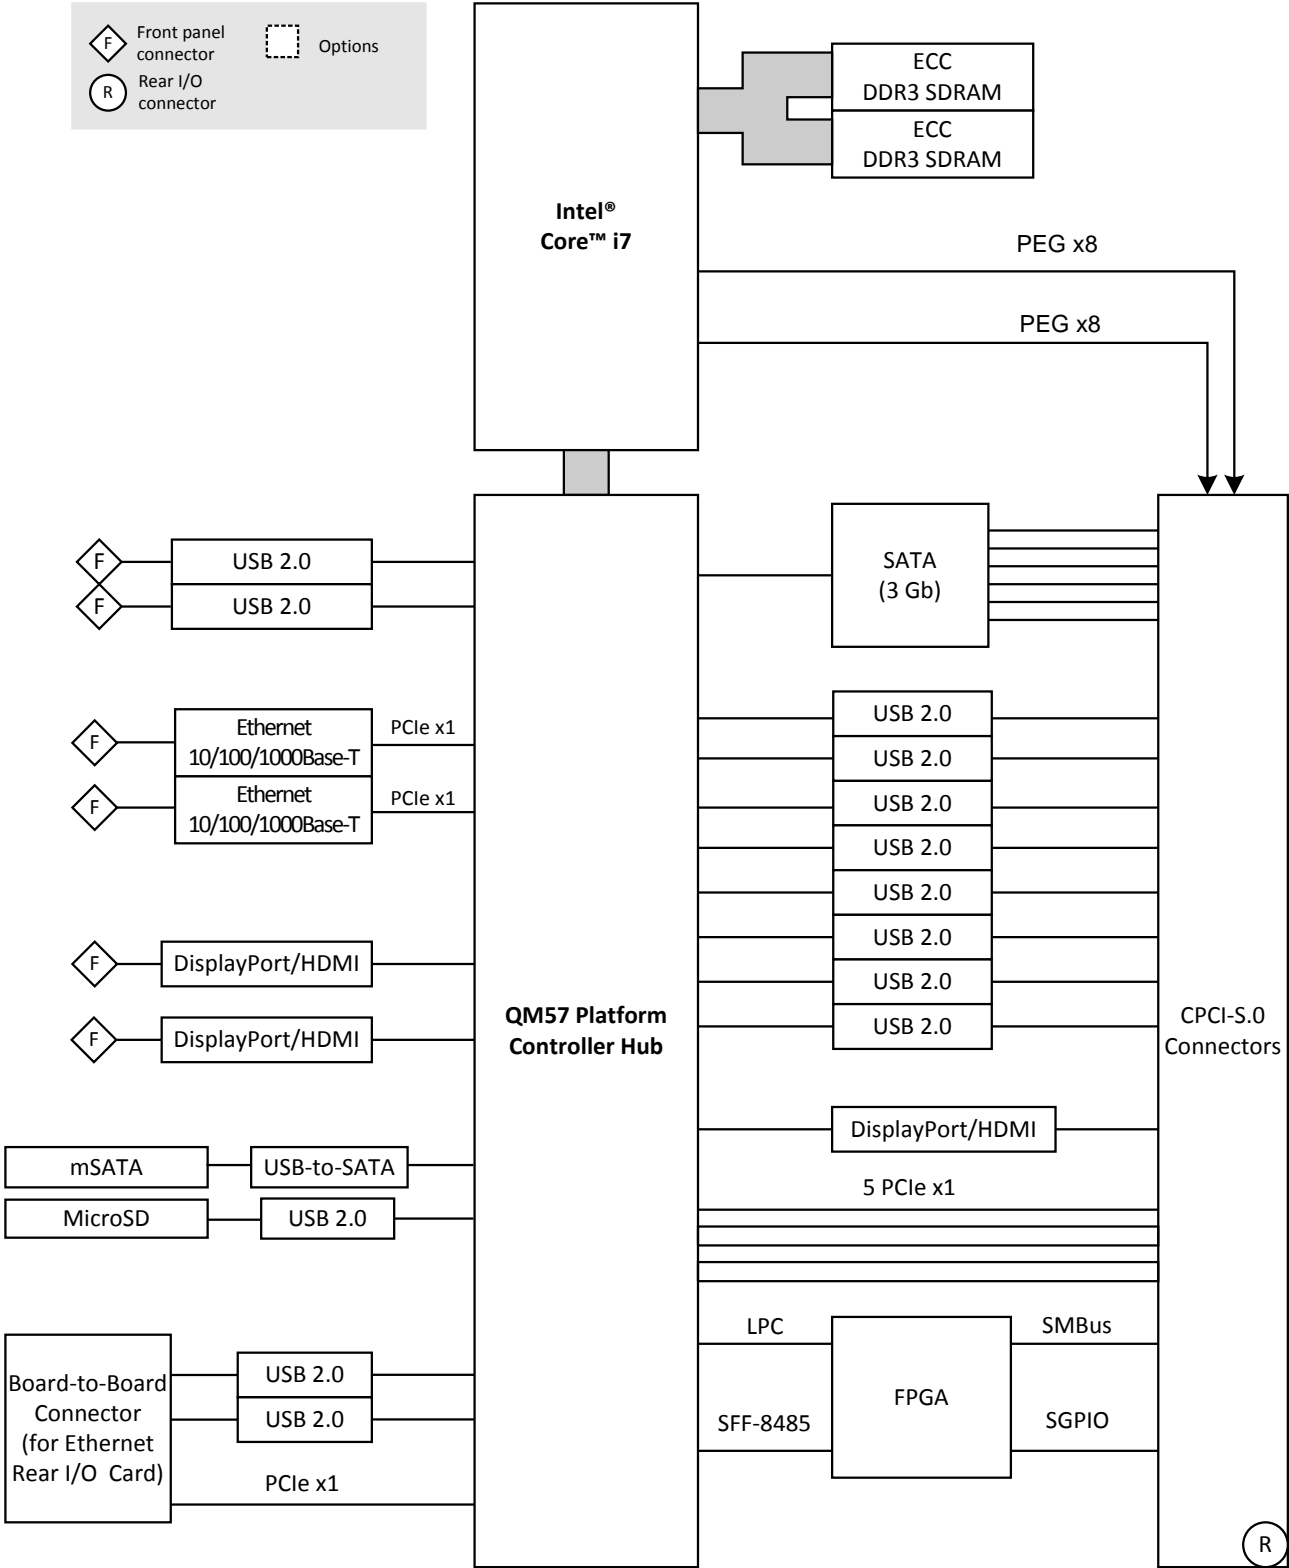

Technical Data

CPU	<ul style="list-style-type: none"> ■ Intel® Core™ i7-610E <ul style="list-style-type: none"> □ 2.53 GHz processor core frequency □ 3.2 GHz maximum turbo frequency □ 1066 MHz system bus frequency ■ Chipset <ul style="list-style-type: none"> □ QM57 Platform Controller Hub (PCH)
Memory	<ul style="list-style-type: none"> ■ 4 MB L3 cache integrated in i7 processor ■ Up to 4 GB SDRAM system memory <ul style="list-style-type: none"> □ Soldered □ DDR3 with ECC support □ Up to 1066 MHz memory bus frequency ■ 64 Mbits boot Flash ■ Serial EEPROM 2 KB for factory settings ■ mSATA disk slot <ul style="list-style-type: none"> □ Connected via one USB-to-SATA bridge ■ Serial GPIO (SGPIO) <ul style="list-style-type: none"> □ One interface via CPCI-S.0 rear connector □ Compliant with SFF 8485 specification ■ One microSD™ card slot <ul style="list-style-type: none"> □ Via USB
Mass Storage	<ul style="list-style-type: none"> ■ Serial ATA (SATA) <ul style="list-style-type: none"> □ Six channels via rear I/O □ SATA Revision 2.x support □ Transfer rates up to 300 MB/s (3 Gbit/s) □ RAID level 0/1/5/10 support □ Hot-plug together with G501
Graphics	<ul style="list-style-type: none"> ■ Integrated in QM57 chipset <ul style="list-style-type: none"> □ 45nm, Hi-K process graphics □ 5.75th generation □ Maximum resolution: 2560x1600 (DisplayPort®), 1920x1200 (HDMI/DVI) ■ Two DisplayPort® connectors at front panel <ul style="list-style-type: none"> □ Optionally two DVI/HDMI ports via external adapter ■ One DisplayPort® at CPCI-S.0 rear connector (instead of one interface at the front) <ul style="list-style-type: none"> □ Optionally SDVO or DVI/HDMI port
I/O	<ul style="list-style-type: none"> ■ USB <ul style="list-style-type: none"> □ Two USB 2.0 host ports via Series A connector at front panel □ Eight USB 2.0 host ports via CPCI-S.0 rear connector □ Two USB 2.0 host ports for connection of the rear I/O card □ EHCI implementation □ Data rates up to 480 Mbit/s ■ Ethernet <ul style="list-style-type: none"> □ Two 10/100/1000Base-T Ethernet channels at the front □ RJ45 connectors at front panel □ Ethernet controllers are connected by two x1 PCIe® links □ Two onboard LEDs to signal LAN link, activity status and connection speed
Front Connections	<ul style="list-style-type: none"> ■ Two DisplayPort® ■ Two USB 2.0 (Series A) ■ Two Ethernet (RJ45)
Rear I/O	<ul style="list-style-type: none"> ■ 6 SATA ■ 1 DisplayPort® ■ 8 USB ■ 5 PCI Express® x1 links ■ 2 PEG x8 links ■ SGPIO

Technical Data

PCI Express®	<ul style="list-style-type: none"> ■ Two x8 PCI Express® graphics links via CPCI-S.0 rear connector ■ Five x1 PCIe® links via CPCI-S.0 rear connector ■ Two x1 PCIe® links to connect local 1000Base-T Ethernet controllers ■ One x1 PCIe® link via for connection of the rear I/O card ■ PCIe® 1.x support ■ Data rate 250 MB/s (2.5 Gbit/s per lane)
Miscellaneous	<ul style="list-style-type: none"> ■ Real-time clock with GoldCap backup, battery-buffered ■ Power supervision and watchdog ■ Temperature measurement ■ 2 board status LEDs ■ 2 user LEDs ■ Reset button
CompactPCI® Serial	<ul style="list-style-type: none"> ■ Compliance with CompactPCI® Serial PICMG CPCI-S.0 Specification ■ System slot
Electrical Specifications	<ul style="list-style-type: none"> ■ Supply voltage/power consumption: <ul style="list-style-type: none"> □ +12V (9..16V), 45W □ +5V (-5%/+5%) standby voltage optional
Mechanical Specifications	<ul style="list-style-type: none"> ■ Dimensions: conforming to CompactPCI® Serial specification for 3U boards ■ Front panel: 4HP with ejector ■ Weight: <ul style="list-style-type: none"> □ 208 g (w/o heat sink) □ 398 g (with heat sink and mSATA adapter)
Environmental Specifications	<ul style="list-style-type: none"> ■ Temperature range (operation): <ul style="list-style-type: none"> □ 0..+60°C □ Airflow: min. 1.5 m/s, typical power dissipation 29W, with Windows® XP operating system, 1 Gb Ethernet, without CPU clock reduction ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300 m to + 3,000 m ■ Shock: 50 m/s², 30 ms ■ Vibration (function): 1 m/s², 5 Hz - 150 Hz ■ Vibration (lifetime): 7.9 m/s², 5 Hz - 150 Hz ■ Conformal coating on request
MTBF	<ul style="list-style-type: none"> ■ 435 685h @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	<ul style="list-style-type: none"> ■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	<ul style="list-style-type: none"> ■ Conforming to EN 55022 (radio disturbance), IEC 61000-4-2 (ESD), IEC 61000-4-3 (electromagnetic field immunity), IEC 61000-4-4 (burst), IEC 61000-4-5 (surge) and IEC 61000-4-6 (conducted disturbances)
BIOS	<ul style="list-style-type: none"> ■ InsydeH2O™ UEFI Framework
Intel® Active Management Technology	<ul style="list-style-type: none"> ■ Out of Band (OOB) Access <ul style="list-style-type: none"> □ Power off Access □ Independent of OS status □ Power status control □ Keyboard-Video-Mouse (KVM) Viewer (VNC-compatible) □ IDE-Redirect □ Serial-over-LAN ■ Manageability Engine in Chipset ■ Network Filters in Chipset ■ Dedicated Flash Storage Area

Technical Data

Software Support	<ul style="list-style-type: none"> ■ Windows® ■ Linux <ul style="list-style-type: none"> □ tested/verified with: Ubuntu 10.04 (kernel 2.6.32-21) 32-bit and 64-bit versions □ OpenSuse 11.3 32-bit and 64-bit versions □ Detailed matrix of supported interfaces under Ubuntu 10.04 and OpenSuse 11.3 ■ VxWorks® (on request) ■ QNX® (on request) ■ For more information on supported operating system versions and drivers see Downloads.
------------------	---

Configuration & Options

Standard Configurations

Article No.	CPU Type	Clock	System RAM	mSATA/microSD	Operating Temperature
02G020-02	i7-620UE	1.06 GHz	2 GB	0 MB	-40..+85°C screened
02G020-03	i7-610E	2.53 GHz	4 GB	0 MB	0..+60°C

Options

CPU	<ul style="list-style-type: none"> ■ Intel® Core™ i7-610E, 2.53 GHz, 4 MB Cache, 35 W ■ Intel® Core™ i7-620LE, 2 GHz, 4 MB Cache, 25 W ■ Intel® Core™ i7-620UE, 1.06 GHz, 4 MB Cache, 18 W ■ Intel® Core™ i5-520E, 2.4 GHz, 3 MB Cache, 35 W, no AMT support ■ Intel® Core™ i3-330E, 2.13 GHz, 3 MB Cache, 35 W, no AMT support
Memory	<ul style="list-style-type: none"> ■ System RAM <ul style="list-style-type: none"> □ 2 GB or 4 GB ■ mSATA disk <ul style="list-style-type: none"> □ 0 MB up to maximum available ■ microSD™ card <ul style="list-style-type: none"> □ 0 MB up to maximum available
I/O	<ul style="list-style-type: none"> ■ Ethernet <ul style="list-style-type: none"> □ One Gigabit Ethernet on M12 connector instead of two interfaces on RJ45
Rear I/O	<ul style="list-style-type: none"> ■ Ethernet <ul style="list-style-type: none"> □ Up to eight Gigabit Ethernet interfaces on the backplane using rear I/O card (e.g. GM1)
Operating Temperature	<ul style="list-style-type: none"> ■ Depends on system configuration (CPU, hard disk, heat sink...) ■ Maximum: +85°C ■ Minimum: -50°C
Cooling Concept	<ul style="list-style-type: none"> ■ Also available with conduction cooling in MEN CCA frame

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

Ordering Information

Standard G20 Models	02G020-02	Intel® Core™ i7-620UE, 1.06 GHz, 2 GB DDR3 DRAM with ECC, mSATA and uSD socket, -40..+85°C Tx screened (-40..+70°C, with up to +85°C for 10 minutes)
	02G020-03	Intel® Core™ i7-610E, 2.53 GHz, 4 GB DDR3 DRAM with ECC, mSATA and uSD socket, 0..+60°C
Related Hardware	Please note that the GM2 (08GM02-xx) is not supported by G20 boards (02G020-xx) with revisions lower than Rev. 01.01.00.	
	08GM01-00	CompactPCI® Serial 4x Gigabit Ethernet rear I/O mezzanine card, -40..+85°C screened
	08GM02-00	CompactPCI® Serial 8x Gigabit Ethernet rear I/O mezzanine card, -40..+55°C screened
Memory	0751-0046	MicroSD card, 2 GB, -40..+85°C
	0751-0051	SSD mSATA, 8 GB, -40..+85°C
	0751-0052	MicroSD card, 4 GB, -40..+85°C
Systems & Card Cages	0701-0058	CompactPCI® Serial 19" 4U/84 HP rack-mount enclosure for 3U cards (vertical), 9-slot backplane, system slot left, full mesh, 460 W ATX PSU 90..264VAC, 1U fan tray with 2x 12 VDC fans, 0..+45°C
	MEN delivers turn-key systems completely installed (hardware, operating system, accessories), wired and tested. Different rack sizes, power supplies and backplanes on request. For details please contact your local sales representative.	
Miscellaneous Accessories	05G000-00	Front panel kit for use of 3U G2x family CPU cards with 6U 8HP front
	0780-0005	DisplayPort® to DVI-D adapter, 20 cm
	0780-0006	Active DisplayPort® (DP) to single link DVI-D adapter, 20cm, max. resolution 1920x1200, AMD / ATI Eyefinity technology
	08GM01-00	CompactPCI® Serial 4x Gigabit Ethernet rear I/O mezzanine card, -40..+85°C screened
Software: Linux	This product is designed to work under Linux. See below for all available separate software packages.	
	13MD05-90	MDIS5 System (and Device Driver) Package (MEN) for Linux. This software package includes most standard device drivers available from MEN.

Ordering Information

Software: Windows®	This product is designed to work under Windows®. See below for all available separate software packages.	
	10F014-78	Windows® XP Embedded BSP (MEN) for F11S, F14, F15, F17, F18, F19P, F21P, G20, XM1, XM1L, XM2, MM1, MM2, DC1, DC2, DC13, RC1, BC50I, BC50M, BL50W and BL50S
	10Y000-78	Windows® Embedded Standard 7 BSP for F19P, F21P, F22P, F23P, G20, G22, CB70C, CB70, XM2, MM2, BC50M, BC50I, BL50W, BL50S, BC70M, BL70S, BL70W, BL70E, DC2, DC13, F205, F206, F210, F215, F216, G215, P506, P507 and P511
	13G020-77	Windows® Installset (MEN) for G20 and G22 (Includes all free drivers developed by MEN for the supported hardware.)
	13T003-70	Windows® chipset driver (Intel®) for F14, F15, F17, F18, F18E, F19P, F21P, F22P, G20, G22, XM2, CB70C, D9, D6, D7, D601, A19 and A20
	13T010-70	Windows® 32-bit network driver (Intel®) for XM1, XM1L, XM2, MM2, CB70C, F11S, F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, SC24, BC50I, BC50M, BL50W, BL50S, BL70W and BL70S
	13T020-70	Windows® 64-bit network driver (Intel®) for F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, XM2, CB70C, SC24, BC50I, BC50M, BL50W, BL50S, BL70W and BL70S
	13T021-70	Windows® XP 32-bit graphics driver (Intel®) for G20
	13T022-70	Windows® 7/Vista 32-bit graphics driver (Intel®) for G20
	13T023-70	Windows® 7/Vista 64-bit graphics driver (Intel®) for G20
13T027-70	Windows® Intel® Management Engine Driver (Intel®) for G20	
Software: Firmware/BIOS	This product includes a specially adapted BIOS.	
	14G020-01	System BIOS for G20
Software: Miscellaneous	Intel® software development products such as analyzers, compilers, threading tools etc. can be downloaded under www.intel.com/cd/software/products/asm-na/eng/index.htm . IA-32 Intel® Architecture Software Developer's Manuals are available under www.intel.com/products/processor/manuals/index.htm .	
For operating systems not mentioned here contact MEN sales .		
Documentation	Compare Chart 3U CompactPCI® Serial CPU and I/O cards » Download	
	20G020-00	G20 User Manual
	20G020-ER	G20 Errata
	21APPN014	Application Note: Switching on the AMT function
	21APPN015	Application Note: Using Real-Time Operating Systems on MEN CPUs with InsydeH2O™ UEFI BIOS
	21APPN016	Application Note: Accessing SMBus under Linux Kernel 3.2 on MEN Intel® Boards

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SAS
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.
860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.