


F18 – 3U CompactPCI®/Express Intel® Core™ 2 Duo CPU Board

- Intel® Core™ 2 Duo T7500, 2.2 GHz
- Dual core 64-bit processor
- Full 64-bit support (4 GB memory addressable)
- PCI Express® six x1 links
- 4 HP system master or stand-alone
- 32-bit CompactPCI® or cPCI Express®
- Up to 4 GB DDR2 DRAM soldered
- CompactFlash® slot
- 3 SATA interfaces
- Video via VGA and 2 SDVO
- 2 Gigabit Ethernet (PCIe®)
- Up to 8 USB 2.0
- High Definition audio
- Board controller

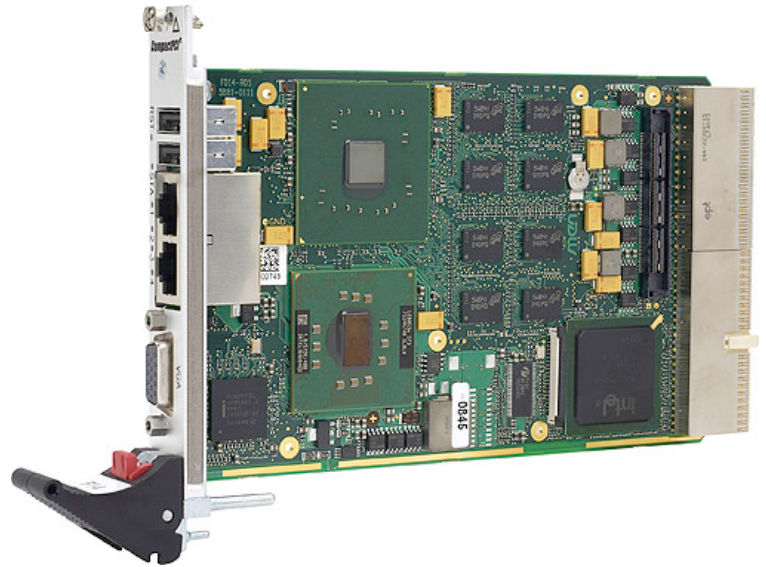

Equipped with the Intel® high-performance Core 2 Duo processor T7500 running at 2.2 GHz, the F18 is a versatile 4HP/3U (single-slot, single-size Eurocard) single-board computer based on the latest multi-core processor architecture from Intel® with full 64-bit support. The CPU card delivers an excellent graphics performance and is designed especially for embedded systems which require high computing performance with low power consumption.

The F18 offers a 32-bit/33-MHz CompactPCI® bus interface and can also be used without a bus system. In combination with a specific side card it can also perform system-slot functionality in a CompactPCI® Express system.

A total of six PCI Express® lanes for high-speed communication (such as Gigabit Ethernet, graphics) are supported on the F18. 2 x1 PCIe® links are used for the two onboard Ethernet interfaces. 4 x1 or 1 x4 PCIe® links are available on a specific side card.

The DDR2 DRAM is soldered to F18 to guarantee optimum shock and vibration resistance. A robust IDE CompactFlash® device offers nearly unlimited space for user applications. In addition to parallel ATA, three serial ATA lines are available.

The standard I/O available at the front panel of F18 includes VGA graphics, two PCIe®-driven Gigabit Ethernet interfaces as well as two USB 2.0 ports.

The F18 can be extended by different side cards. Additional functions include two digital video interfaces for flat panel connection via DVI (multimedia), a variety of different UARTs or another four USB 2.0 ports, SATA for hard disk or RAID connection and HD audio. The F18 is also prepared for rear I/O where for example another two USB 2.0 ports can be connected.


Two watchdogs for thermal supervision of the processor and board temperature as well as for monitoring the operating system complete the functionality of the F18.

The F18 operates in Windows® and Linux environments as well as under real-time operating systems that support Intel®'s multi-core architecture. The Award BIOS was specially designed for embedded system applications.

Equipped with Intel® components exclusively from the Intel® Embedded Line, the F18 has a guaranteed minimum standard availability of 5 years. The F18 is suited for a wide range of industrial applications, e.g. for monitoring, vision and control systems as well as test and measurement. Main target markets comprise industrial automation, multimedia, traffic and transportation, aerospace, shipbuilding, medical engineering and robotics.

The F18 comes with a tailored passive heat sink within 4 HP height. The robust design of the F18 make the board especially suited for use in rugged environments with regard to shock and vibration according to applicable DIN, EN or IEC industry standards. The F18 is also ready for coating so that it can be used in humid and dusty environments.

Diagram

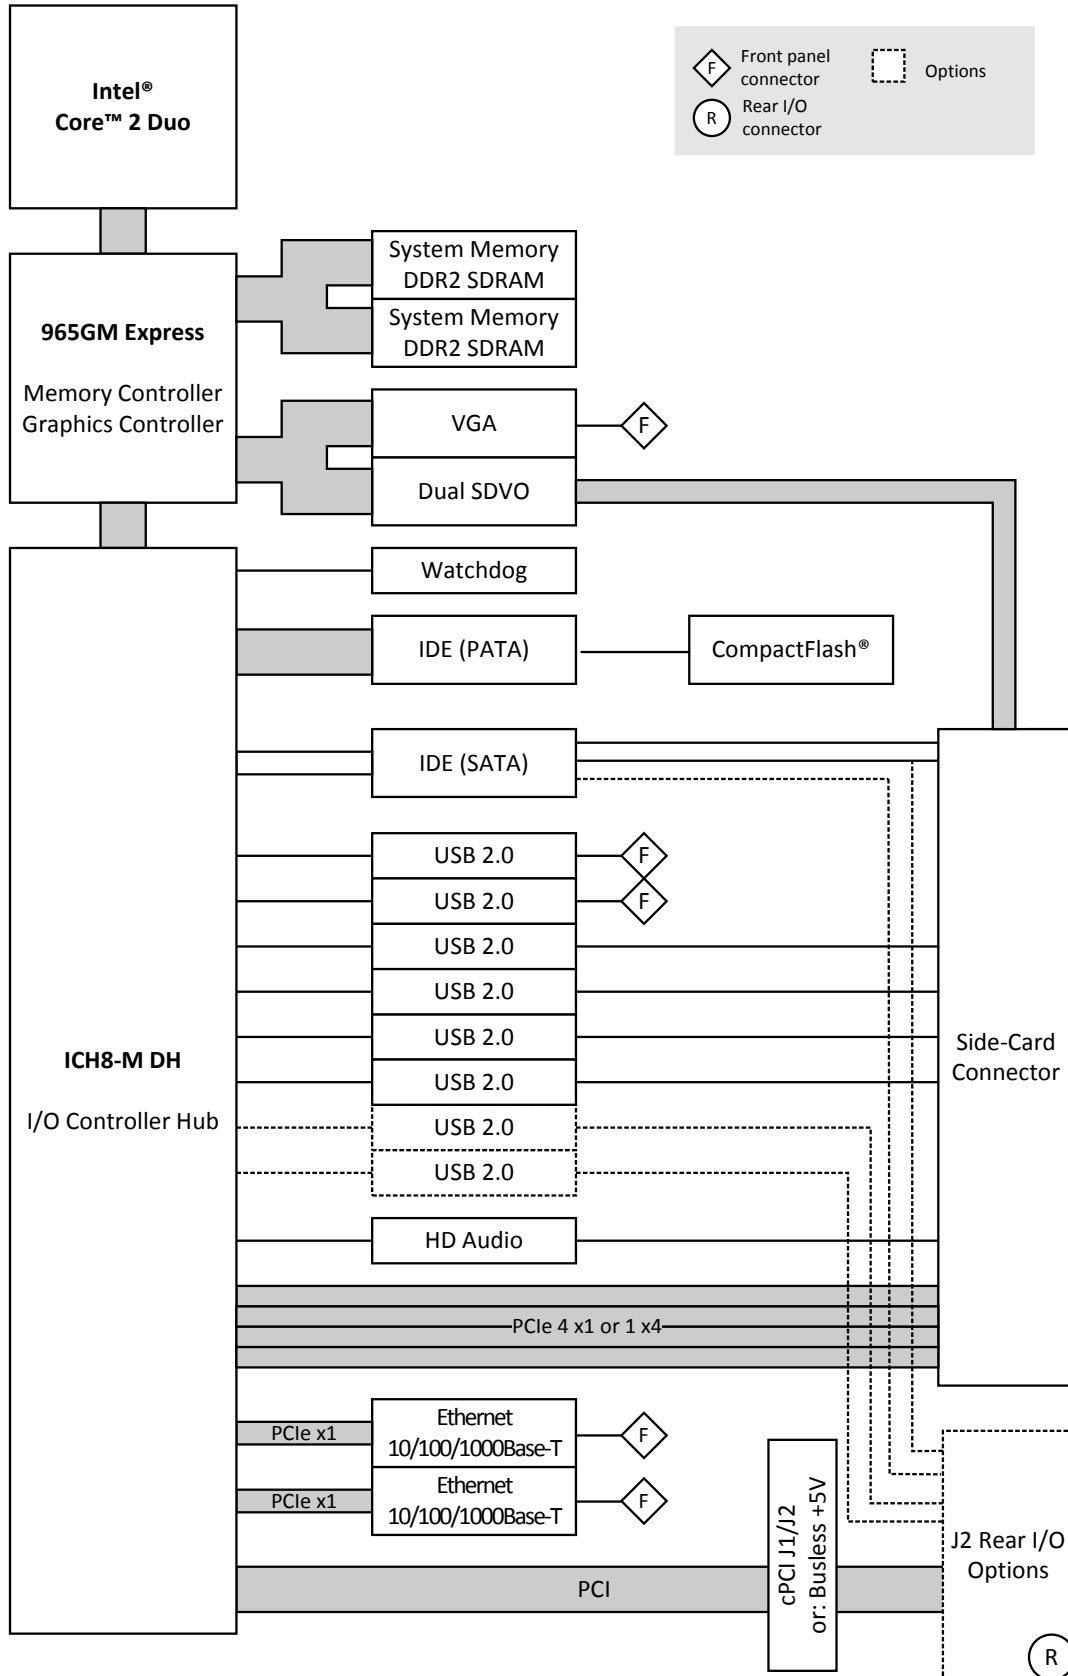

Technical Data

CPU	<ul style="list-style-type: none">■ Intel® Core™ 2 Duo T7500<ul style="list-style-type: none">□ Dual-core 64-bit processor□ 2.2GHz processor core frequency□ Up to 800MHz front-side bus frequency■ Chipset<ul style="list-style-type: none">□ Northbridge: Intel® 965GME Express□ Southbridge: Intel® ICH8M-E (Enhanced)
Memory	<ul style="list-style-type: none">■ 4MB L2 cache integrated in Core 2 Duo■ Up to 4GB SDRAM system memory<ul style="list-style-type: none">□ Soldered□ DDR2□ 667MHz memory bus frequency□ Dual-channel, 2x64 bits■ 8Mbits boot Flash■ Serial EEPROM 2kbits for factory settings■ CompactFlash® card interface<ul style="list-style-type: none">□ Via onboard IDE□ Type I□ True IDE□ DMA support
Mass Storage	<ul style="list-style-type: none">■ Parallel IDE (PATA)<ul style="list-style-type: none">□ One IDE port for local CompactFlash®■ Serial ATA (SATA)<ul style="list-style-type: none">□ Two channels via side-card connector, up to two channels via rear I/O (optional)□ Transfer rates up to 150MB/s□ RAID level 0/1 support
Graphics	<ul style="list-style-type: none">■ Integrated in 965GME Express chipset<ul style="list-style-type: none">□ Up to 500MHz 256-bit graphics core□ Maximum resolution: 2048 x 1536 pixels @ 60Hz, 32bpp reduced blanking timing (driver limited)■ VGA connector at front panel■ Two SDVO ports available via side-card connector<ul style="list-style-type: none">□ Two additional DVI connectors at front panel optional via side card□ Simultaneous connection of two monitors
I/O	<ul style="list-style-type: none">■ USB<ul style="list-style-type: none">□ Two USB 2.0 ports via Series A connectors at front panel□ Four USB 2.0 ports via side-card connector□ Two USB 2.0 ports via rear I/O on request□ UHCI implementation□ Data rates up to 480Mbit/s■ Ethernet<ul style="list-style-type: none">□ Two 10/100/1000Base-T Ethernet channels□ RJ45 connectors at front panel□ Ethernet controllers are connected by two x1 PCIe® links□ Onboard LEDs to signal activity status and connection speed■ High Definition (HD) audio<ul style="list-style-type: none">□ Accessible via side-card connector
Front Connections (Standard)	<ul style="list-style-type: none">■ VGA■ Two USB 2.0 (Series A)■ Two Ethernet (RJ45)

Technical Data

Miscellaneous	<ul style="list-style-type: none"> ■ Board controller ■ Real-time clock, buffered by a GoldCap or alternatively a battery (5 years life cycle) ■ Watchdog timer ■ Temperature measurement ■ One user LED ■ Reset button
PCI Express®	<ul style="list-style-type: none"> ■ Two x1 links to connect local 1000Base-T Ethernet controllers <ul style="list-style-type: none"> □ Data rate 250MB/s in each direction (2.5 Gbit/s per lane) ■ One x4 or four x1 links for extension through side-card connector <ul style="list-style-type: none"> □ Data rate up to 1GB/s in each direction (2.5 Gbit/s per lane)
CompactPCI® Bus	<ul style="list-style-type: none"> ■ Compliance with CompactPCI® Core Specification PICMG 2.0 R3.0 ■ CompactPCI® Express support (EXP.0 R1.0) ■ System slot ■ 32-bit/33-MHz CompactPCI® bus ■ V(I/O): +3.3V (+5V tolerant)
Busless Operation	<ul style="list-style-type: none"> ■ Board can be supplied with +5V only, all other voltages are generated on the board ■ Backplane connectors used only for power supply
Electrical Specifications	<ul style="list-style-type: none"> ■ Supply voltage/power consumption: <ul style="list-style-type: none"> □ +5V (-3%/+5%), 9A typ. □ +3.3V (-3%/+5%), 1.8A (2 Gb Ethernet), 1.3A (1 Gb Ethernet) □ +12V (-10%/+10%), approx. 10mA □ If the board is supplied with 5V only (typically without a bus connection), the 3.3V are generated on the board and fed to the backplane (3A max.) No external 3.3 V voltage may be applied in that case! ■ MTBF: 238,053h @ 40°C according to IEC/TR 62380 (RDF2000)
Mechanical Specifications	<ul style="list-style-type: none"> ■ Dimensions: conforming to CompactPCI® specification for 3U boards ■ Front panel: 4HP with ejector ■ Weight: 420g
Environmental Specifications	<ul style="list-style-type: none"> ■ Temperature range (operation): <ul style="list-style-type: none"> □ 2.2GHz Core 2 Duo T7500: 0..+60°C □ Conditions: airflow 1.5m/s, typical power dissipation 38W, with Windows® XP operating system, 1 Gb Ethernet and hard disk, without CPU clock reduction ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300m to + 2,000m ■ Shock: 15g/11ms ■ Bump: 10g/16ms ■ Vibration (sinusoidal): 1g/10..150Hz ■ Conformal coating on request
Safety	<ul style="list-style-type: none"> ■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	<ul style="list-style-type: none"> ■ Tested according to EN 55022 (radio disturbance), IEC61000-4-2 (ESD) and IEC61000-4-4 (burst)
BIOS	<ul style="list-style-type: none"> ■ Award BIOS
Software Support	<ul style="list-style-type: none"> ■ Note that 64-bit hardware technology requires 64-bit operating system support ■ Windows® (including Vista) ■ Linux ■ VxWorks® (on request) ■ QNX® ■ Intel® Virtualization Technology, allows a platform to run multiple operating systems and applications in independent partitions; one computer system can function as multiple "virtual" systems ■ For more information on supported operating system versions and drivers see Downloads.

Configuration & Options

Standard Configurations

Article No.	CPU Type	Clock	System RAM	CFlash	Side Card Slot	Operation Temperature
02F018-00	T7500	2.2 GHz	4 GB	0 MB	right	0..+60°C

Options

CPU	<ul style="list-style-type: none"> ■ Core 2 Duo T7500, 2.2GHz (35W) ■ Core 2 Duo L7500 1.6 GHz (17W) ■ Core 2 Duo U7500 1.06GHz (10W)
Memory	<ul style="list-style-type: none"> ■ System RAM <ul style="list-style-type: none"> □ 256 MB, 512 MB, 1 GB, 2 GB or 4 GB ■ CompactFlash® <ul style="list-style-type: none"> □ 0 MB up to maximum available
Graphics	<ul style="list-style-type: none"> ■ One or two DVI-D connectors at front via side card <ul style="list-style-type: none"> □ Simultaneous connection of two monitors
I/O	<ul style="list-style-type: none"> ■ Ethernet <ul style="list-style-type: none"> □ 9-pin D-Sub connector with one or two 10/100Base-T ports instead of two RJ45 connectors □ Two M12 connectors with two 10/100/1000Base-T ports instead of two RJ45 connectors on 8HP
Rear I/O	<ul style="list-style-type: none"> ■ Two SATA channels (third SATA channel via side-card connector) ■ Two USB 2.0 ports
Mechanical	<ul style="list-style-type: none"> ■ Side card can be added at left or right side of CPU
Operation Temperature	<ul style="list-style-type: none"> ■ Depends on system configuration (CPU, hard disk, heat sink...) ■ Maximum: +60°C ■ Minimum: -40°C (all processors)
Cooling Concept	<ul style="list-style-type: none"> ■ Also available with conduction cooling in MEN CCA frame

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

Ordering Information

Standard F18 Models	02F018-00	Intel® Core™ 2 Duo T7500, 2.2 GHz, 4 GB DDR2 DRAM, 2 Gigabit Ethernet, 0..+60°C
	02F018-03	Intel® Core™ 2 Duo T7500, 2.2 GHz, 2 GB DDR2 DRAM, 2 Gigabit Ethernet, 0..+60°C
Related Hardware	02F600-00	2 COM extensions and SATA hard disk slot, for F14 and compatible SBCs, -40..+85°C screened
	02F601-00	1 DVI-D and 1 audio at front, SATA hard disk slot, for F14 and compatible SBCs, 4HP, 0..+60°C
	02F601-02	2 DVI-D, 1 audio, 1 COM (via SA-Adapter) at front, SATA hard disk slot, for F14 and compatible SBCs, 8HP, 0..+60°C
	02F602-00	3U CompactPCI® to CompactPCI® Express side card with 1 USB, 1 COM, 1 DVI, SATA hard disk slot, for F14 and compatible SBCs, 0..+60°C
	02F603-00	3U CompactPCI® side card with 2 USB and 1 COM extension, SATA hard disk and CompactFlash® slot, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
	02F604-00	3U CompactPCI® side card with 1 IEEE 1394 FireWire, 1 DVI, 1 HD audio and 1 COM extension, SATA hard disk slot, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
	02F605-00	1 XMC or PMC slot, for F14 and compatible SBCs, -40..+85°C with qualified components
	02F606-00	2 Gigabit Ethernet on Lemo railway compliant connectors, 1 COM extension (SA-Adapter not included), SATA hard disk slot, for F14 and compatible SBCs, conformally coated, -40...+85°C screened
	02F608-00	4 SATA and 2 COM ports, additional SATA hard disk slot on-board, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C

For more information on the interoperability of the side cards with the respective CPU boards please see the [extension card compatibility matrix \(PDF\)](#)

Memory	0751-0045	CompactFlash® card, 4 GB, Type I, fixed bit set, -40..+85°C
	0751-0055	CompactFlash® card, 8 GB, Type I, fixed bit set, -40..+85°C
	0751-0060	CompactFlash® card, 16 GB, -40..+85°C
	0751-0061	CompactFlash® card, 2 GB, Type I, fixed bit set, -40 to +85°C

Systems & Card Cages	0701-0046	CompactPCI® 19" 4U/24HP desktop system for 3U cards, 3-slot 3U CompactPCI® backplane, system slot right, 1U fan tray with 1 fan, 8 HP space for 1 pluggable PSU
	0701-0056	CompactPCI® 19" 4U/84HP rack-mount enclosure for 3U cards (vertical), 4+4-slot 3U CompactPCI® / CompactPCI® Serial hybrid backplane, prepared for rear I/O, 250W power supply wide range 90..264VAC on rear, 1U fan tray with 2 fans included, 0..+60°C

MEN delivers turn-key systems completely installed (hardware, operating system, accessories), wired and tested. Different rack sizes, power supplies and backplanes on request.

For details please contact your local sales representative.

Miscellaneous Accessories	0713-0003	CompactPCI® 3U 1-slot backplane for stand-alone operation of F14, F15, F17, F18, F19P, F21P, F22P, F23P: 32-bit/33-MHz with rear I/O, 3.3V supply, ATX-power, power, JTAG, IPMB and utility connection, 6x screw connection M3
----------------------------------	------------------	--

Software: Linux	This product is designed to work under Linux. See below for all available separate software packages.	
	13MD05-90	MDIS5 System (and Device Driver) Package (MEN) for Linux. This software package includes most standard device drivers available from MEN.

Ordering Information

<p>Software: Windows®</p>	<p>This product is designed to work under Windows®. See below for all available separate software packages.</p> <p>10F014-78 Windows® XP Embedded BSP (MEN) for F11S, F14, F15, F17, F18, F19P, F21P, G20, XM1, XM1L, XM2, MM1, MM2, DC1, DC2, DC13, RC1, BC50I, BC50M, BL50W and BL50S</p> <p>13F014-77 Windows® Installset (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 (Includes all free drivers developed by MEN for the supported hardware.)</p> <p>13T001-70 Windows® network driver (Intel®) for F14, F15, F17, F18, D9, D6, D7, D601, A19, A20 and P601, P602</p> <p>13T003-70 Windows® chipset driver (Intel®) for F14, F15, F17, F18, F18E, F19P, F21P, F22P, G20, G22, XM2, CB70C, D9, D6, D7, D601, A19 and A20</p> <p>13T005-70 Windows® USB2UART driver (FTDI) for F14, F15, F17, F18, F19P, F21P, F22P, F23P, D9, A19, A20, XM2 and XM50 / XM51 / F50P / F50C hosts</p> <p>13T006-70 Windows® HD Audio driver (Realtek) for F14, F15, F17, F18, F19P, F21P, F22P, F23P, D9 and A19</p> <p>13T008-70 Windows® chipset graphics driver (Intel®) for F18</p> <p>13T010-70 Windows® 32-bit network driver (Intel®) for XM1, XM1L, XM2, MM2, CB70C, F11S, F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, SC24, BC50I, BC50M, BL50W, BL50S, BL70W and BL70S</p> <p>13T020-70 Windows® 64-bit network driver (Intel®) for F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, XM2, CB70C, SC24, BC50I, BC50M, BL50W, BL50S, BL70W and BL70S</p>
<p>Software: QNX®</p>	<p>This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.</p> <p>10F014-40 QNX® 6.3.0 installation support files (QNX® and MEN) for F14, F15, F17, F18, F19P, XM1, XM2 and MM1</p> <p>13Y001-06 MDISS low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20</p> <p>13Y002-06 MDISS low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring</p> <p>13Y004-06 MDISS low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, CB70C, SC24, BC50M, BC50I and BL50W</p> <p>13Y007-06 MDISS low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller</p>
<p>Software: Firmware/BIOS</p>	<p>This product includes a specially adapted BIOS.</p> <p>14F018-00 System BIOS for F18</p>

Software: Miscellaneous

Intel® software development products such as analyzers, compilers, threading tools etc. can be downloaded under www.intel.com/cd/software/products/asm-na/eng/index.htm. IA-32 Intel® Architecture Software Developer's Manuals are available under www.intel.com/products/processor/manuals/index.htm.

For operating systems not mentioned here [contact MEN sales](#).

Ordering Information

Documentation

Compare Chart 3U CompactPCI® / PlusIO CPU cards » [Download](#)

Compare Chart 3U CompactPCI® / PlusIO peripheral cards » [Download](#)

Compare Chart 3U CompactPCI® / PlusIO extension cards » [Download](#)

For more information on the interoperability of the side cards with the respective CPU boards please see the [extension card compatibility matrix \(PDF\)](#)

20APPN004 Application Note: How to make a USB stick bootable

20F018-00 F18 User Manual

21APPN016 Application Note: Accessing SMBus under Linux Kernel 3.2 on MEN Intel® Boards

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SAS
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.
860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.