


MLCD Video Wall



With the proven videowall display know-how, OLM4610/50, OLM-4651 offer the best proven videowall performances with multiple value-added functions. Orion expands the customer's choices substantially for the most popular seamless videowall solution.

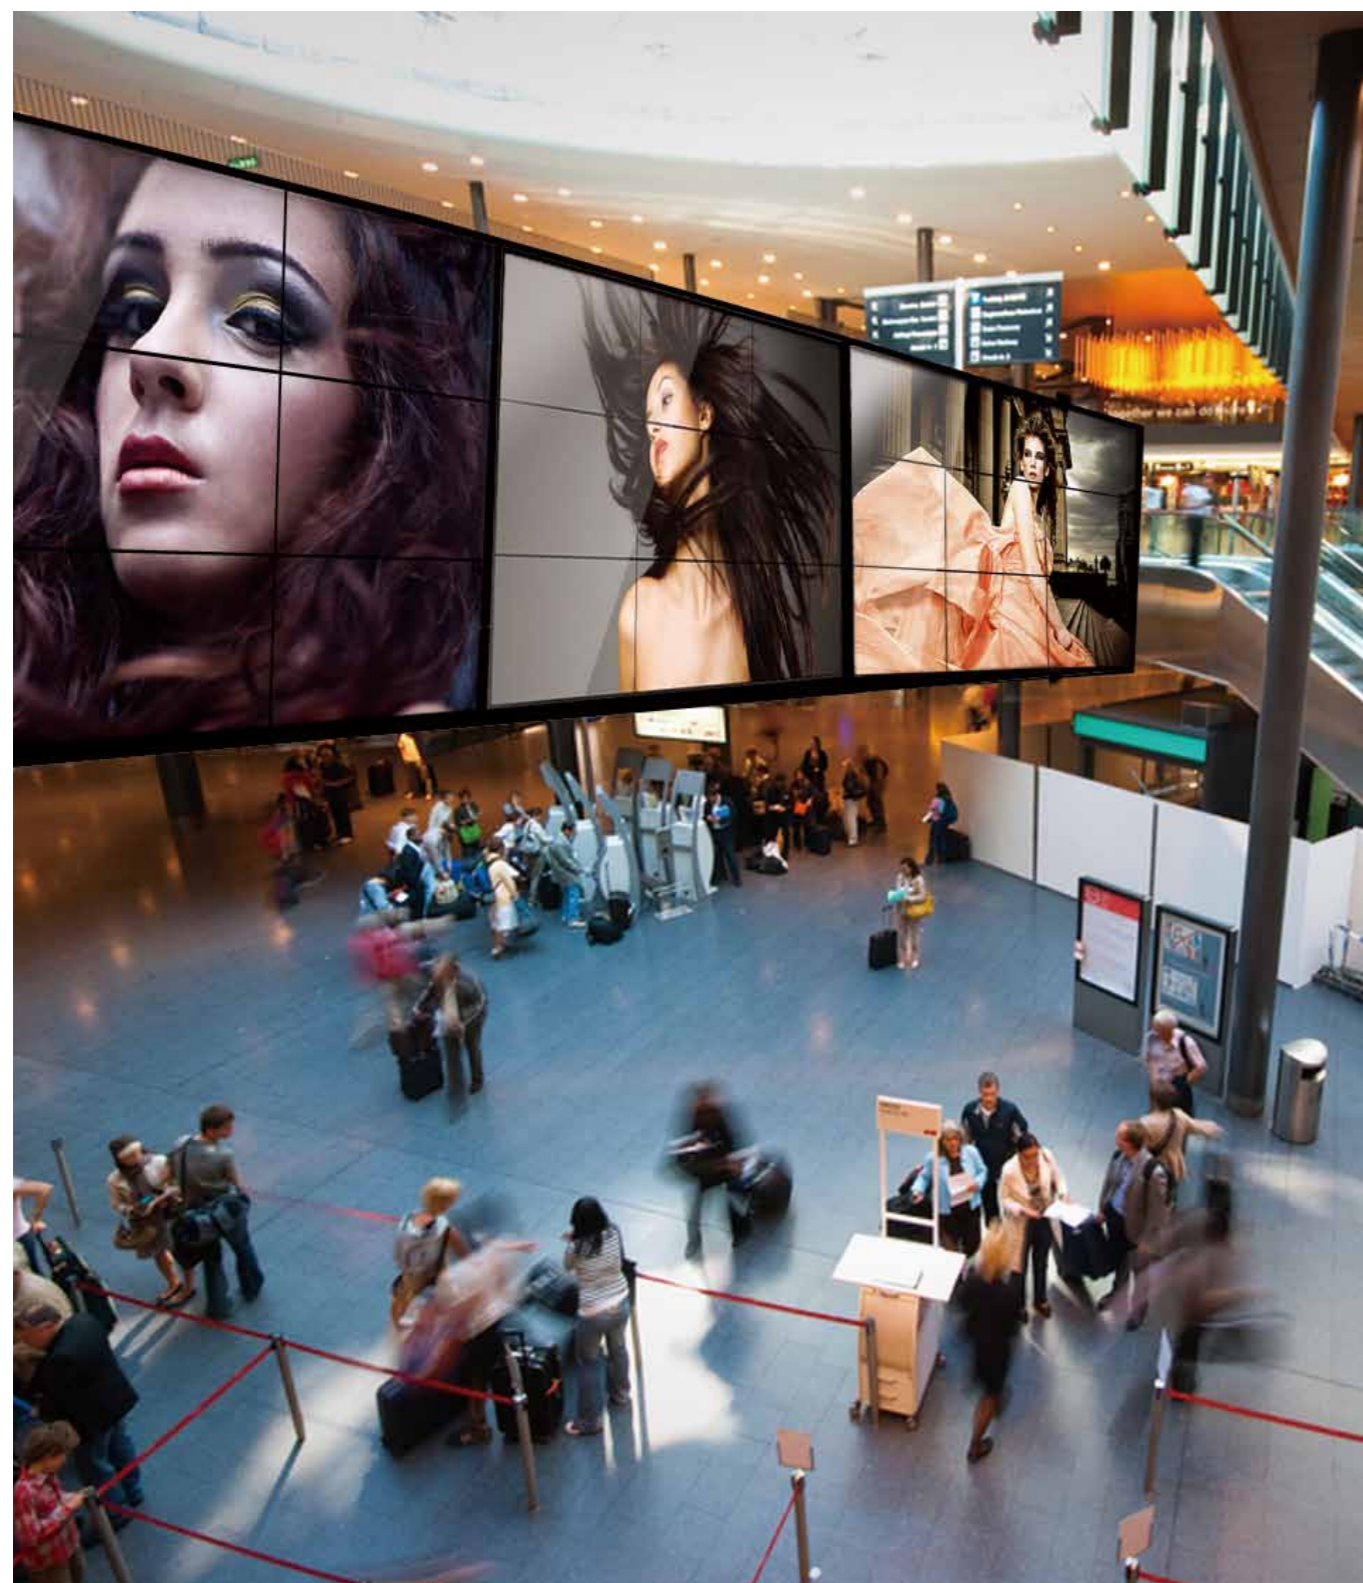

◉ Narrow ▶ Super Narrow



◉ Specification

Model		OLM-4610	OLM-4650	OLM-4651
Back Light Unit Type		CCFL		LED
Power Supply		AC 100V - 240V [50/60Hz]		
Power Consumption	Max	200W	285W	150W
	Typical	190W	260W	145W
	Stand-By	3.0W	4.5W	3W
Luminance of White		450cd/m ²	700cd/m ²	
Contrast Ratio		4,500:1	3,000:1	3,500:1
Seam Gap		7.3mm		5.9mm
Active Display Area		1018.353(H) x 572.544(V)mm		1018.08(H) x 572.67(V)mm
Aspect Ratio		16:9		
Number of pixels		1366(H) x 768(V)		1920(H) x 1080(V)
Pixel Pitch		0.7455 x 0.7455 mm		0.53025 x 0.53025 mm
Display Colors		16.7M		
Viewing Angle		H: 178°, V:178°		
Response Time		8msec (G to G)		
Environmental Condition	Temperature	5°C ~ 35°C		
	Humidity	35% ~ 75%		
Input Signal	PC/DVI Signal	VGA, SVGA, XGA, SXGA, UXGA, WXGA 480p, 576p, 720p(50/60), 1080i(50/60), 1080p(50/60)		
	HDCP	Ready/Not Ready/Ready		
	Frequency	H : 31.5 ~ 75kHz, V : 50, 60 Hz		
In/Output Terminal	Input	DVI-D x 1, PC x 1, Video x 1, RS-232C x 1, LAN x 1, Service x 1		
	Output	DVI-D x 1, PC x 1, Video x 1, RS-232C x 1		
Lamp Life Time		Min 50,000Hrs (25±2°C)		
Dimension		1025.9 x 580 x 99.8 mm	1023.98 x 578.57 x 98.8 mm	
Weight		24Kg(±0.5Kg)	27Kg(±0.5Kg)	25kg(±0.5kg)

※ The Information Described in this Specification is Preliminary and can be changed without prior notice.

◉ External Dimension

