

SATA SLIM J200



FCC E RoHS

FEATURES

- High Performance
- S.M.A.R.T. & i-S.M.A.R.T. Supported
- Built-in hardware BCH ECC
- Bad block management
- Excellent data transfer performance

R: 135MB
W: 130MB

S.M.A.R.T

Budget
friendlyWear
LevelingMDMA
UDMA

MO-297

Specifications

Connector Type	Standard 7+15 Pin SATA Connector
Flash Type	SLC (single level cell)
Density	8GB, 16GB, 32GB, 64GB
Interface	SATA II, SATA I, PIO 0~4, MDMA 0~2, UDMA 0~6
Sustained R/W Performance	Read : 220MB/sec (max.) Write : 180 MB/sec (max.)

Environmental

DC Input	+5V DC $\pm$ 5%
Power consumption (Max.)	Read: 300mA Write: 350 mA Idle: 150 mA
Operating Temperature	0°C~+70°C (Standard Grade) -40°C~+85°C (Industry Grade)
Storage Temperature	-55°C~+95°C
Humidity	Relative Humidity: 10-95%, non-condensing
Endurance	100,000 program/erase cycles
MTBF	> 3,000,000 hours
Certification	CE, FCC, RoHS
Warranty	5 years

Mechanicals

Dimension (W x L x H)	39.0mm x 54.0mm x 6.8mm
Weight	14g $\pm$ 1g
Vibration	7 Hz to 2K Hz, 3 axes
Shock	Duration: 0.5ms, 1500G, 3 axes


Health monitoring Tool

S.M.A.R.T.	Supported
i-S.M.A.R.T.	Supported (Utility for Windows, Linux)

Ordering Information

Capacity	Standard Grade	Industry Grade
8GB	D1SS- <u>08G</u> J20A <u>C</u> 1ES	D1SS- <u>08G</u> J20A <u>W</u> 1ES
16GB	D1SS- <u>16G</u> J20A <u>C</u> 1ES	D1SS- <u>16G</u> J20A <u>W</u> 1ES
32GB	D1SS- <u>32G</u> J20A <u>C</u> 1ET	D1SS- <u>32G</u> J20A <u>W</u> 1ET
64GB	D1SS- <u>64G</u> J20A <u>C</u> 1ET	D1SS- <u>64G</u> J20A <u>W</u> 1ET

Mechanical diagram

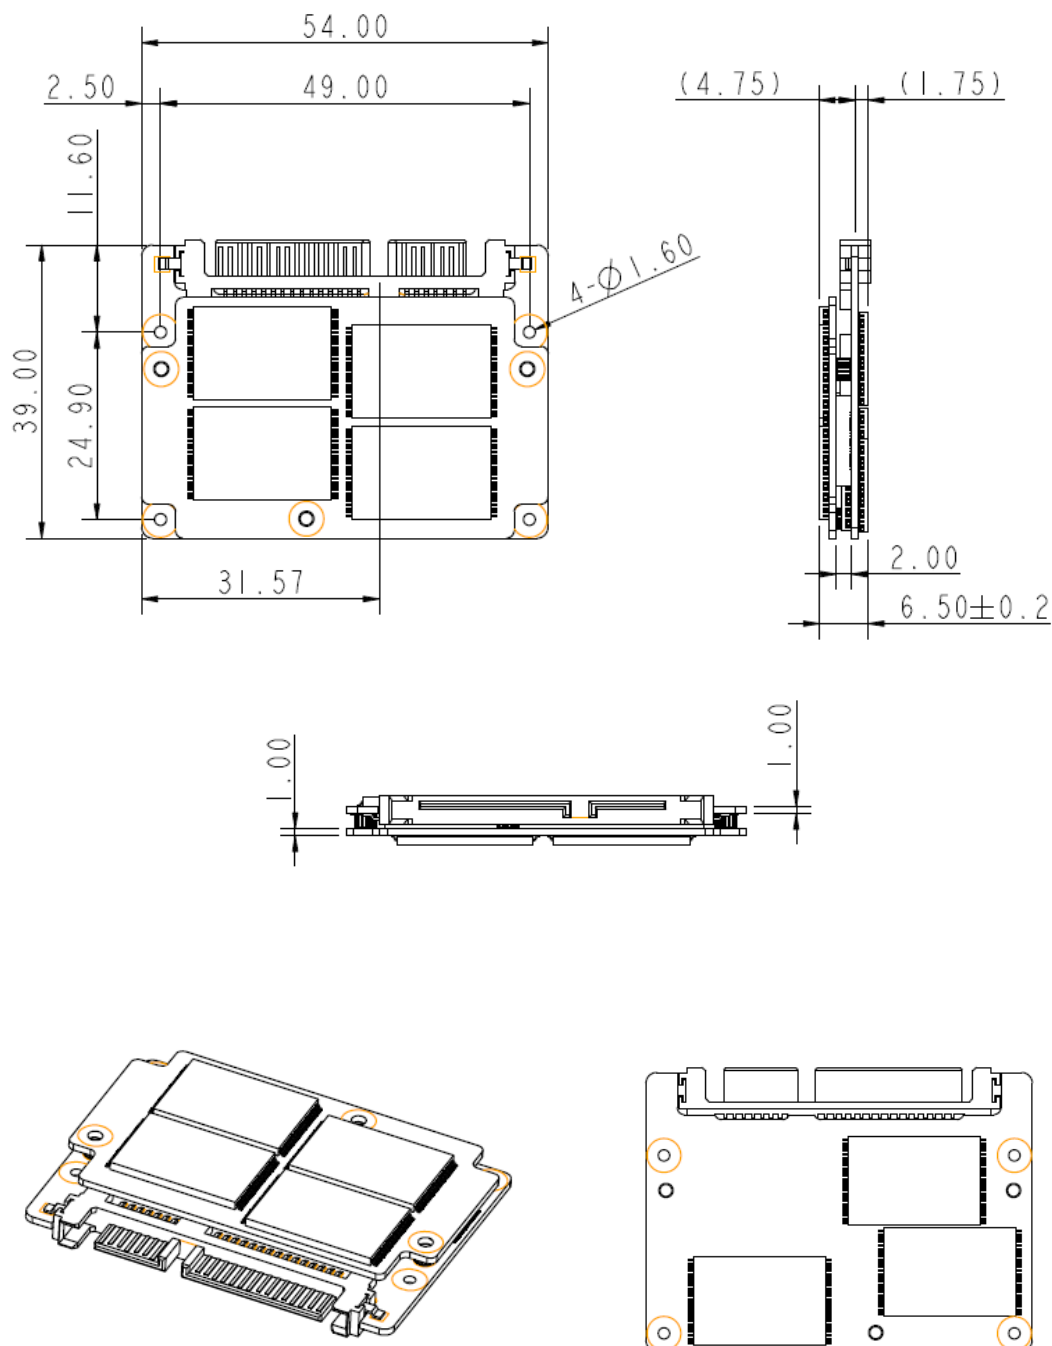

Tolerance $\pm 0.1\text{mm}$

*The pin assignment, component keep out area of InnoDisk SATA Slim J200 is followed by JEDEC MO297 Specification.