


» CP6923 «

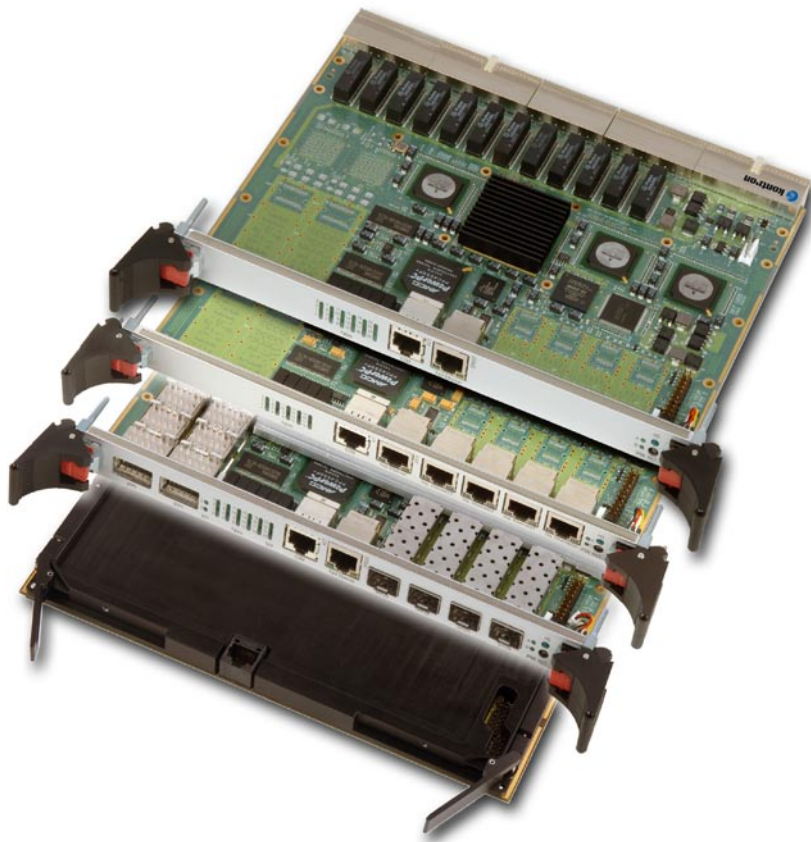

24 Port non-blocking Layer 2 & 3 PICMG 2.16 managed Gigabit Ethernet Switch

- » State-of-the-art technology, future ready
- » Non-blocking layer 2 and 3 switching and routing
- » 24 Gigabit Ethernet ports plus two 10 GbE XFP uplinks
- » Versatile design, adapted to your requirements
- » Ruggedized for harsh environment

CP6923


24 Port non-blocking Layer 2 & 3 PICMG 2.16 managed Gigabit Ethernet Switch

The Kontron CP6923 provides managed built-in switching capacity for CompactPCI installations at an unsurpassed price-performance ratio by implementing the latest developments in switching technology.

It applies to VoIP systems such as Call Servers, Media Gateways and Trunking Gateways in wired and wireless networks, as well as VoIP systems in enterprise networks with high demands on performance. A boost in switching capacity allows to match rising transaction load and traffic load in VoIP installations.

The CP6923 is a 6U hot-swappable CPCI switch with 24 GbE ports and two high capacity uplinks (10GbE). It supports all

relevant standards in carrier grade L2 and L3 switching and routing, including VLANs and QoS (Diffser). It represents the latest member of the CPCI product family for communication networks by Kontron and comes in three standard flavors, all with 20 or more Gigabit Ethernet ports to the rear and a serial and LAN console connection to the front panel. The rugged versions CP6923-R-R2-E2 and CP6923-R-R3-E2 fulfill the temperature, shock and vibration requirements for harsh environment. Both operate from -40°C to +85°C. The forced air cooled R2 board withstands shock & vibration according to the VITA 47's EAC3 specification. The conduction cooled R3 switch fulfills the VITA 47's ECC4 specifications.

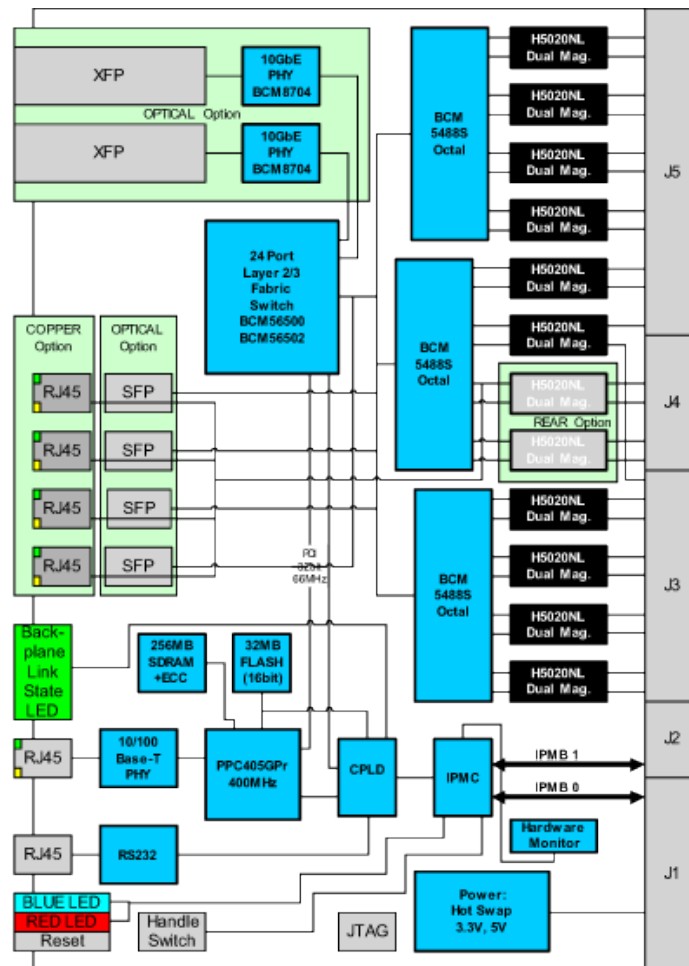

Technical Information

Compliance

CompactPCI Core Specification PICMG 2.0 Rev. 3.0
 CompactPCI Hot Swap Specification PICMG 2.1 R2.0
 CompactPCI System Management PICMG 2.9 R1.0
 CompactPCI Packet Switching Backplane PICMG 2.16 R1.0
 VNE64x Packet Switching Backplane VITA 31.1

Controller and Switch

Broadcom BCM5650x Ethernet switch
 PowerPC® 405, 32-bit, RISC processor core operating up to 400 MHz, synchronous SDRAM interface

Interfaces on Standard Boards

Common

1x 10/100Base-T management port on RJ45
 1x RS232 management port on RJ45
 20x 10/100/1000 Base-T link ports on RTM
 Reset switch
 Status LEDs, one per port

CP6923-C

4x 10/100/1000Base-T link ports on RJ45

CP6923-0

4x 10/100/1000Base-X link ports on SFP
 2x 10GBase-R uplink ports on XFP

CP6923-R

4x additional 10/100/1000Base-T RTM ports

Interfaces on Rugged Versions

CP6923-R-R2

1x 10/100Base-T management port on RJ45
 1x RS232 management port on RJ45
 Reset switch
 Status LEDs, one per port
 24x 10/100/1000Base-T link ports on RTM

CP6923-R-R3:

1x Ethernet management port on RJ45
 24x 10/100/1000Base-T link ports on RTM

Management and Protocols

Management via SNMP, Telnet, CLI
 - In-band
 - Out of band via Ethernet or RS232
 IPMI version 1.5
 Reliable software, field upgradable
 Dual boot images with roll-back capabilities
 Advanced management monitoring features
 Ethernet/Bridging protocols include
 - Link aggregation (802.3ad)
 - VLANs (802.1Q)
 - Spanning tree (802.1D, 802.1w)
 - Flow control (802.3x)
 - GVRP, GMRP
 Comprehensive Multicast and IGMP snooping feature set
 Enhanced Link aggregation hashing features
 Packet memory configuration options

General

Power Cons.

35 Watts (typ.)

Dimensions

215 mm x 160, 6U

Op. Humidity

0% to 92% (non-condensing)

Weight

< 800g

MTBF

198,216h @ 30°C / 86F (Bellcore Issue 6)

CP6923

IEC 60068-2-6, IEC 60068-2-27, IEC 61131-2
 0°C to +55°C, forced air cooling required

CP6923-R-R2




R1 + VITA 47, class V1/EAC3, normal and extended
 -40°C to +85°C, forced air cooling required

CP6923-R-R3

VITA 47, class ECC4, MIL-STD-810 Method 514 Proc1,
 MIL-STD-810 Method 516 Proc1, extended
 -40°C to +85°C, conduction cooling required
 Higher shock and vibration levels can be achieved when installed in a ruggedized system.

Ordering Information

Article	Order-No.	Description
CP6923-C	33608	R1 copper version with 20, Gigabit Ethernet ports to the rear and four RJ45 ports to the front panel
CP6923-O	33609	R1 optical version with 20, Gigabit Ethernet ports to the rear; four SFP cage connectors and two 10Gb XFP cage connectors to the front panel
CP6923-R	35832	R1 rear version with 24, Gigabit Ethernet ports to the rear
CP6923-R-R2-E2	34787	R2 rear version with 24, Gigabit Ethernet ports to the rear
CP6923-R-R3-E2	37086	R3 rear version with 24, Gigabit Ethernet ports to the rear
CP-RI06-923	36309	6U, 4HP, rear transition module for PICMG 2.16 switch, 12 ports (ports 12 to 23), RJ45, RS232 on RJ45
CP-RI06-923	36310	6U, 8HP, rear transition module for PICMG 2.16 switch, 24 ports (ports 1 to 24), RJ45, RS232 on RJ45

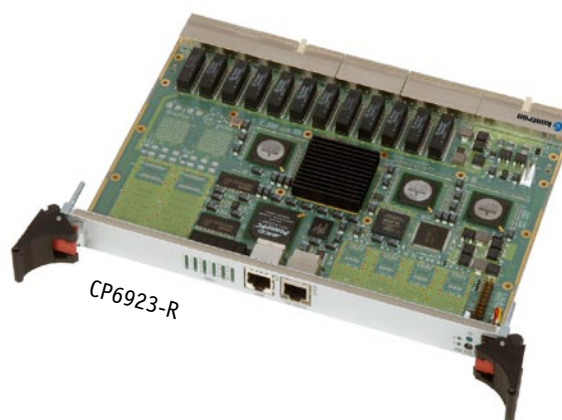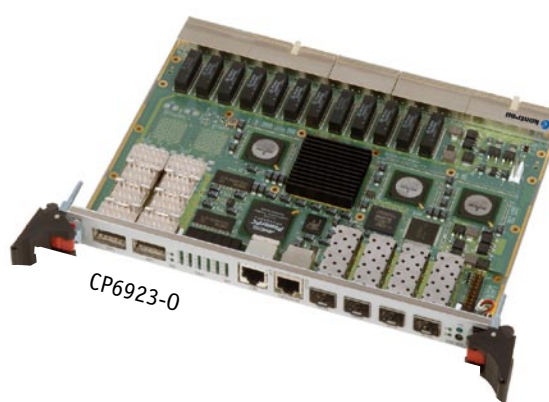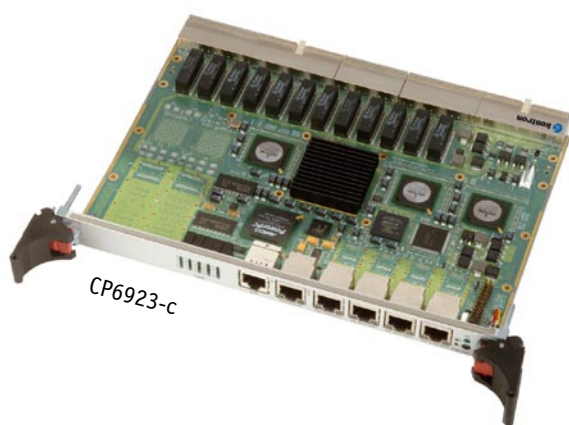

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany

Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA

Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building, Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China

Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

