

100" dnp LaserPanels provide a strong alternative to LED flat screens in meeting rooms, classrooms and even private homes. In the 90-100" range, they offer the most attractive size-cost-quality profile on today's market!

The most cost-effective 100" flat screen

dnp LaserPanels offer large high-contrast images at a fraction of the cost of an LED flat screen. They meet the users' demands for large easy-to-install display sizes while remaining affordable for companies, educational institutions and homeowners.

How it works

dnp LaserPanels are based on optical screen technology, and powered by a laser projector mounted over the screen, which shoots down from a steep angle. The display is mounted on the wall like LED flat screens. And since it is an ultra short throw solution, users never need to worry about stepping into the beam while presenting.

Optimized for comfortable viewing

dnp LaserPanels are optimized for comfortable viewing. This means that the brightness and contrast of the image is balanced to match the surrounding environment, so that the eye doesn't have to adapt constantly.

Easy to install all-in-one solution

The compact display can be fitted into any conference and meeting room. It is available as an all-in-one solution including laser projector, screen and projector mount (Touch version). All elements of the display can be mounted on the wall with the projector above or below the screen.



dnp optical flat screen

- > 100" optical flat screen display in 16-9 format
- > Optical screen and laser projection technology
- > Optimized for comfortable viewing
- > Full HD resolution (1920x1080p)
- > All-in-one solution
- > Touch version available


Touch screen option

The dnp LaserPanel is available in a soft version and a Touch version for interactive presentations. The dnp LaserPanel Touch is equipped with an interactive camera and IR pen.

What's in the boxes

A dnp Optical Flat Screen, dnp laser projector, IR remote control, mount (Touch version), installation guides, user manual, WiFi dongle (Touch version).

Application suitability	
Auditorium	* * *
Conference room	* * * * * *
Control room	* *
TV studio	* * * *
Advertising – in-store	* * * * *
Advertising – window display	* * * *
Home entertainment – bright living room	* * * * *
Home entertainment – darkened home theatre	* * * *
Education	* * * * * *







Specifications

SCREEN DETAILS

PRODUCT NO.

		750 001 0501	751 001 2912
TYPE		Soft	Touch
SCREEN SIZE		100	100
ASPECT RATIO		16:9	16:9
Resolution	pixels	1920x1080	1920x1080
Image brightness (normal/eco)	cd/m ²	170 / 110	310 / 200
Image brightness (normal/eco)	Ft-L	50 / 30	90 / 60
Recommended viewing cone	degrees	160	50
Screen type		soft	rigid
Screen lens technology		lenticular	circular
Projector position		below	below/above
Interactive camera		по	included
Interactive pens (x2)		по	included
Laser curtain (finger touch)		по	optional
Projector wall mount		optional	included
WiFi dongle		optional	included

IMAGE AREA

Width	mm	2214	2214
Height	mm	1245	1245
Width	inch	87.2	87.2
Height	inch	49.0	49.0

FRAME INFO

Width	mm	10	20
Depth	mm	30	20
Width	inch	0.4	0.8
Depth	inch	1.2	0.8
Colour		Black	Black
Decor line (6 mm)		-	White

OUTSIDE DIMENSIONS (INCLUDING FRAME)


Width	mm	2234	2254
Height	mm	1265	1285
Width	inch	87.9	88.7
Height	inch	49.8	50.6

SHIPPING DIMENSIONS

TYPE		Soft	Touch
Screen box length	mm	2330	2354
Screen box width	mm	370	85
Screen box height	mm	160	1406
Screen box length	inch	91.7	92.7
Screen box width	inch	14.6	3.3
Screen box height	inch	6,3	55,4

WEIGHT

Screen (net)	kg	11	22
Screen box (gross)	kg	20	33
Screen (net)	lb	24	49
Screen box (gross)	lb	44	72



The soft version of the dnp LaserPanel is designed to be installed with the projector below the optical screen, The dnp LaserPanel Touch can be installed with the projector positioned either above or below it. In situations with high levels of ambient light, dnp recommends mounting the projector below the screen, so that images are projected upwards. In this position, ambient light is blocked from above, leading to even higher image contrast. Due to the asymmetrical lenses, correct orientation of the screen in relation to the projector is essential in all cases.





Specifications

PROJECTOR DETAILS

DIMENSIONS

Width	mm	382
Height	mm	126
Depth	mm	310
Width	inch	15.1
Height	inch	5.0
Depth	inch	12.2

FEATURES

Voltage		100-240 VAC 50/60 Hz, 3.5A
Maximum power consumption	W	335
Stand-by power consupmtion	W	< 0.5
Noise level	dB	32-38
Technology		DLP
Light source		Laser
Minimum life of light source	h	> 20,000
HDMI input		x2
VGA input		x1
VGA input/output		rlx
Composite video input		ΙX
Composite audio input		x1
Microphone (3.5mm mini-jack)		x1
Audio (3.5mm mini-jack) input		x1
RS-232		x1
USB		x1
RJ45		x1
3D		Yes
Start-up time	S	10
Shut-down time	S	6
Feet adjustment	mm	20
	inch	0.8

POSITIONING

Front of projector to screen front (x)	mm	635
Bottom of projector to image start (y)	mm	330
Front of projector to screen front (x)	inch	25.0
Bottom of projector to image start (y)	inch	13.0


SHIPPING DIMENSIONS


Projector box length	mm	483
Projector box width	mm	420
Projector box height	mm	328
Projector box length	inch	19.0
Projector box width	inch	16.5
Projector hox height	inch	12 9

WEIGHT

Projector (net)	kg	6
Projector box (gross)	kg	8
Projector (net)	lb	12
Projector box (gross)	lh	18



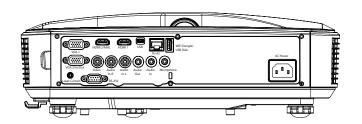



1245 mm

dnp denmark as
 Skruegangen 2
 DK-2690 Karlslunde
 Denmark

> Phone +45 4616 5100 Fax +45 4616 5200 www.dnp-laserpanel.com www.dnp-screens.com dnp@dnp.dk



100" dnp **Laser**Panel™

Specifications

WALL MOUNT DETAILS

DIMENSIONS

Length	mm	540
Height	mm	230
Width	mm	176
Length	inch	21.3
Height	inch	9.1
Width	inch	6.9

SHIPPING DIMENSIONS

Length	mm	460
Height	mm	190
Width	mm	300
Width	inch	18.1
Height	inch	7.5
Depth	inch	11.8

WEIGHT

Mount (net)	kg	4
Mount box (gross)	kg	5
Mount (net)	lb	8
Mount box (gross)	lb	10

DESIGN

Alu arm colour	White
Plastic cover colour	White

GENERAL INFORMATION

OPERATING ENVIRONMENT

Temperature	°C	10-40
	°F	50-104
	%RH	10-70

CERTIFICATES



















Specifications

CABINET DETAILS Small side Medium Large side Projector cabinet cabinet side cabinet (model 230) (model 210) (model 220) unnu 40LE white V2 unnu 210-white V2 unnu 220-white V2 unnu 230-white V2 Part no. White*

OUTSIDE DIMENSIONS

Width	mm	689	517	1034	1551
Height	mm	708	354	354	354
Depth	mm	365	365	365	365
Width	inch	27,1	20,4	40,7	61,1
Height	inch	27,9	13,9	13,9	13,9
Depth	inch	14,4	14,4	14,4	14,4

INSIDE DIMENSIONS

Width	mm	654	482 x 1	482 x 2	482 x 3
Height	mm	676	322	322	322
Depth w/back cover	mm	295	295	295	295
Depth w/o back cover	mm	347	347	347	347
Width	inch	25,7	19,0 x 1	19,0 x 2	19,0 x 3
Height	inch	26,6	12,7	12,7	12,7
Depth w/back cover	inch	11,6	11,6	11,6	11,6
Depth w/o back cover	inch	13,7	13,7	13,7	13,7

SHIPPING DIMENSIONS

Width	mm	794	622	1139	1656
Height	mm	813	460	460	460
Depth	mm	470	470	470	470
Width	inch	31.3	24.5	44.8	65.2
Height	inch	32.0	18.1	18.1	18.1
Depth	inch	18.5	18.5	18.5	18.5

WEIGHT

Net	kg	29*	10	21	33
Gross (shipping)	kg	32*	12	24	36
Net	lb	64*	22	46	73
Gross (shipping)	lb	71*	27	53	79

^{*} Without projector

MISCELLANEOUS

Open/Close time	sec	10		
Voltage	V/Hz	100-240 VAC 50/60 Hz		
Stand-by power	watt	0,04		
Max. Power	watt	160		

SOLUTIONS

dnp ExecutiveBase	dnp ExecutiveClassic	dnp Executive Plus
lx Projector cabinet, white* lx Cover O5A	1x Projector cabinet, white * 4x Model 210 cabinet, white 2x Wooden door, white 1x Cover 05A 2x Cover 05B 4x Wall bracket 1	1x Projector cabinet, white* 4x Model 220 cabinet, white 4x Wooden door, white 2x Fabric door, white 1x Cover OSA 2x Cover OSB 4x Wall bracket 2
Overall size (W x H x D): 689 x 708 x 365 mm 27.1" x 27.9" x 14.4"	Overall size (W x H x D): 1723 x 708 x 365 mm 67.8" x 27.9" x 14.4"	Overall size (W x H x D): 2757 x 708 x 365 mm 108.5" x 27.9" x 14.4"

^{*} Wall bracket included

ACCESSORIES

Part no. for 210/220/230	White	Silver	Black
Wooden door	unnu d21white V2		
Fabric door	unnu c21white V2	unnu c21silver V2	unnu c21black V2
Drawer	unnu draw w 36,5 V2		
Extra shelf	unnu s10 white V2		

Type of opening for wires	Oblong	None	Square
Wire cover (for all cabinets)	unnu 05a	unnu 05b	иппи О5с
	88	dR dR	,rt. \$88

	For 210	For 220	For 230
Wall bracket	unnu wall bracket 1	unnu wall bracket 2	unnu wall bracket 3

CERTIFICATES












Small side cabinet (model 210)



Large side cabinet (model 230)







^{*} Ral 9010