



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



LCD PUBLIC DISPLAY

Changes for the Better



Expand Your Horizons
Public Displays for Wide-ranging Applications



MITSUBISHI ELECTRIC EUROPE (BENELUX Office)

Nijverheidsweg 23A, 3641 RP Mijdrecht - The Netherlands
Tel: +31 (0)297-282461 Fax: +31 (0)297-283936 - www.MitsubishiElectric.nl

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com>

- All information contained herein is subject to change without prior notice.
- HDMI, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
- is a trademark of the Video Electronics Standards Association, registered in the U.S. and other countries.
- Other brand, product, and service names are trademarks or registered trademarks of the respective companies.
- Product appearance in this brochure does not imply that Mitsubishi Electric Corporation intends to make it available in all countries where the company and its subsidiaries operate.
- Photographs are simulated images.

Revised publication effective Oct. 2011.
Supersedes publication S-S20-8-C8147-B May 2009.
Specifications are subject to change without notice.

for a greener tomorrow



LCDs to Match an Impressively Wide Range of Applications



High functionality, stylish design and excellent durability – perfect for public spaces such as airports and train stations, and business or educational settings.

LCDs with eye-catching clarity and a range of features that expand application possibilities.



Advanced MDT Series LCDs



Economical LDT Series LCDs

MDT421S/MDT521S/MDT551S/MDT652S

Highly functional, durable public displays for demanding commercial-use applications



MDT652S: 31mm
MDT551S: 17.5mm
MDT521S: 19.5mm
MDT421S: 16mm

Stylish design with black hairline finish

Full 1920 × 1080 High-definition Resolution, High Brightness and High Durability



All MDT Series models feature full 1920 × 1080 high-definition resolution and high brightness of 700cd/m² for stunning image quality and remarkable clarity. Even in heavy-use applications such as airports where the displays are constantly working, high durability is provided through the use of parts with a long service life. In addition, the MDT551S is 120Hz-compatible, double the conventional 60Hz, for smooth playback of fast-moving images.



OPS-compatible (for MDT551S)

For the first time, Mitsubishi Electric offers compatibility with the Open Pluggable Specification (OPS) card, allowing insertion of a personal computer card*, which eliminates the time and effort required to connect a signal cable, and opens up a wider scope of applications.



*The MDT551S is compatible with Advantech Co. Ltd's ARK-DS220F-MTSA1E. For details, please contact a local Advantech dealership.

Video and Serial Control using Category-5 (CAT5) Cable

CAT5 ensures image quality, installation flexibility and serial control


Supports Cable Lengths of Up to 150 metres

Long VGA cables can lead to a loss in image quality and higher installation costs. However, the MDT521S and MDT652S have a built-in CAT5 receiver and CAT5 transmitter box as standard equipment (optional for the MDT421S and MDT551S), enabling the connection of much longer cables.



Video and Serial-control Signals via Single CAT5 Cable


Utilising the CAT5 transmitter box, video and RS-485 serial-control signals can be sent using the same CAT5 cable, eliminating the need for a separate serial-control cable.

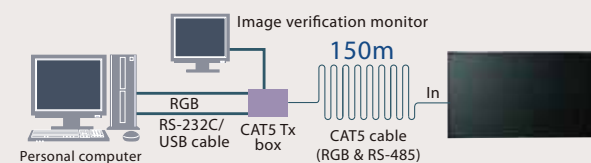

*Compatibility with commercially available controllers is not guaranteed. To create an environment for transmitting RS-485 signals, please follow the instructions in the user's manual.

Link Multiple Displays in Series using CAT5 Connections

Use the daisy-chain connection function of the CAT5 receiver and output terminal to link multiple displays in series via CAT5 cables.

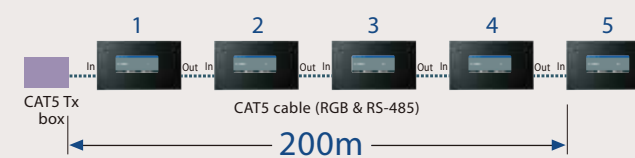


Allowable cable length

Connection	Max. cable length	Signal timing
One monitor	150m	1920×1080/60Hz
Multiple monitors	200m*	1920×1080/60Hz

* Total length of connected cables.
* Up to five displays can be linked in series (three displays for MDT551S).
* Degraded image quality and variance in possible connection distance may occur depending on factors such as installation conditions and the cable used.

CAT5 Image Quality Correction Tools

Various features have been incorporated to optimise image quality over long cable lengths.



- 1) Cable Length Selector
Changes to optimised default settings for cable lengths
- 2) Equaliser Function
Optimises signal shape to minimise image blur on the screen
- 3) R/G/B Gain Adjustment
Brightens dark images
- 4) R/G/B Skew Compensation
Corrects colour deviation

* CAT5 connectors can only be connected to the CAT5 transmitter box, included with the MDT521S and MDT652S models, and available as an option for the MDT421S and MDT551S. Do not attempt to connect any other network hardware as it may result in damage to the hardware connected, transmitter box and/or displays.


SDI Card-compatible (for MDT551S)

An SDI card is available as an option for the MDT551S, providing compatibility with signal formats (3G-SDI, HD-SDI, SD-SDI) used as standard in the broadcast industry. Daisy chains with a cable length of up to 350 metres long and consisting of a maximum of 25 display units are possible.

Allowable cable length

Connection	Max. cable length		
	SD-SDI	HD-SDI	3G-SDI
One monitor	300m	200m	100m
Multiple monitors (total cable length)	350m	250m	150m

* Possible transmission distance varies depending on installation conditions and the cable used.

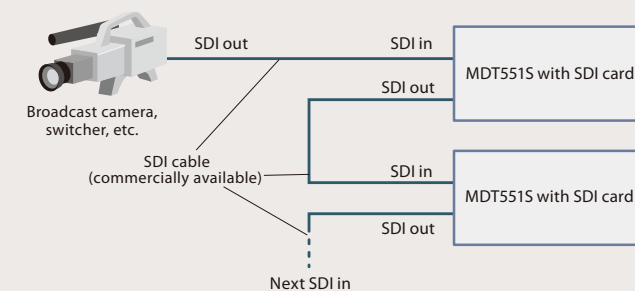

LAN-based Control (for MDT551S and MDT652S)


The MDT551S and MDT652S models can be controlled remotely via an Ethernet LAN.



Auto Brightness Control

Front/Rear sensors – a unique innovation from Mitsubishi Electric

MDT Series models are equipped with light sensors, one each installed in the front and rear, for automatic brightness control. Even when used at venues where lighting conditions change continuously, optimum viewing is ensured. An added benefit is that panel service life and energy savings are increased through lower power consumption in darker environments.

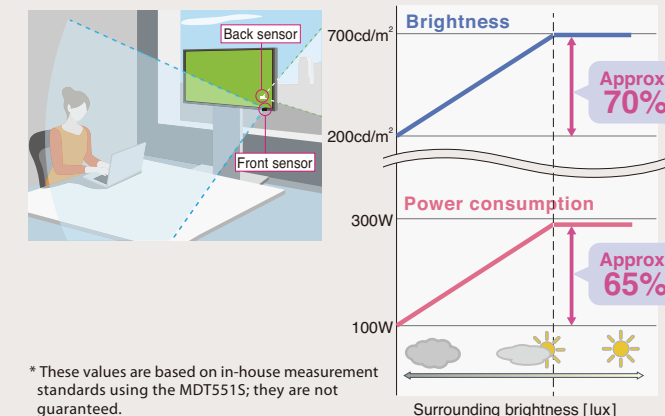

* These values are based on in-house measurement standards using the MDT551S; they are not guaranteed.


Energy Star-compliant (for MDT551S)

As a mark of its energy-efficiency, the MDT551S is compliant with Energy Star international standards.



Colour Matching for Multi-screen Applications (available as service option only)

Qualified service personnel can utilise original colour calibration software and a designated colour sensor to adjust the whitepoint, brightness and gamma curve settings* to match adjacent panels.

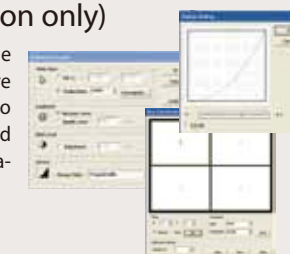

* Available for the MDT551S.

In-floor/Face-up* Use Realised – Expanding Installation Flexibility Beyond Landscape and Portrait Applications

Display orientation is a key factor for the presentation and appearance of monitors. Advanced design technologies allow maximum flexibility in the positioning of the MDT521S and MDT551S, from landscape, portrait and angled positions to fully flat (face-up*) installations.

* Internal cooling fan must operate full-time when a panel is used in a face-up installation. Face-down/upside-down installation is not supported.



Built-in Speakers (for MDT551S)

Two 10W built-in speakers are equipped.

Enhanced Connectivity with DisplayPort Terminal

The MDT421S, MDT551S and MDT652S are equipped with a DisplayPort terminal, a next-generation digital interface designed to enable maximum display performance and deliver video and other signals over a single cable up to 15 metres in length.



Other Features

Other features include a multi-level screensaver function, programmable scheduling function, tiling capability with frame compensation, RS-232C communications, PiP, PoP and side-by-side, wide-ranging colour temperature adjustment, power-on delay, auto adjust and auto set-up, and IR remote lock.

Affordable models providing reliable performance and an impressive range of useful features



Versatile Connections through CAT5 Compatibility (for LDT551V)

The following features are included as part of compatibility with CAT5 connections:

- Support for cable lengths of up to 150 metres
- Video and serial-control signals via a single CAT5 cable
- Capability to link up to three displays in series
- CAT5 image quality correction tools



Multi-level Screensaver Function


To reduce image persistence and maximise panel service life in demanding signage applications, all models are equipped with a four-level screensaver function. Each level can be set to meet specific application requirements.

- Gamma mode: Optimises the gamma curve
- Cooling fan mode: Fan operates continuously rather than automatically activating when internal temperature reaches the predesignated limit
- Brightness mode: Adjustment of display brightness
- Motion mode: Images can be slightly shifted in four directions according to user-specified time intervals




Programmable Scheduling Function

Up to seven different scheduled intervals can be programmed according to time, day of week and input port. Additionally, content from different sources can be scheduled for specific displays within the same installation. Increased panel service life and energy savings are also possible through a well-planned schedule in which displays are turned off when not required.

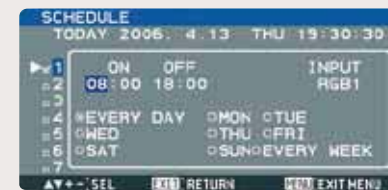

Power-save Function for PC and Video Signals

The monitor can be set to automatically go into power management mode when either the PC signal (RGB sync) or video input signal is lost. This saves both power and the need to individually turn off each monitor when not in use, such as during the time a location is closed.



Energy Star-compliant (for LDT551V)

As a mark of its energy-efficiency, the LDT551V is compliant with Energy Star international standards.



Vertical Installation, Tiling and Long Cable Capability

Displays can be mounted vertically, creating a whole new range of installation possibilities more closely matched to design needs.



Tiling Capability with Frame Compensation

Combine up to 25 panels (5 wide x 5 high) to create a single large image (i.e. video wall) or other high-impact signage. A frame compensation function is incorporated to adjust for the width of panel bezels so that images are displayed with the utmost accuracy.




Frame compensation off



Frame compensation on

Remote Management & Diagnostics via Bi-lateral RS-232C Communications

Use this feature to create an independent interface on a personal computer for remote control and adjustment of monitors. All models can be daisy-chained to save on cabling costs as illustrated below. Daisy-chained monitors can be simultaneously controlled or adjusted. Using a unique ID number, each monitor (up to 26 in a daisy-chain) can be controlled independently.



In addition, critical indicators of monitor status such as input signal, cooling fan and internal temperature can be verified remotely (cooling fan starts automatically when the internal temperature rises beyond a certain limit). Remote asset management is also available to verify model and serial number.



LAN-based Control (for LDT551V)


The LDT551V model can be controlled remotely via an Ethernet LAN.



PiP, PoP and Side-by-side

Picture-in-Picture and Picture-out-of-Picture modes are provided, enabling content from a video input source to be displayed in window format while displaying the main image from the computer source or vice versa.

All models are equipped with a side-by-side mode, an ideal feature for broadcasting and video-conferencing applications.

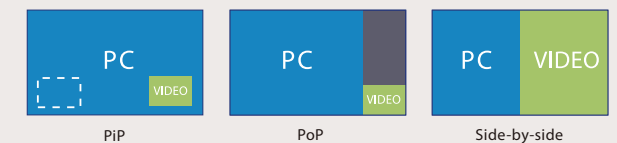


Wide-ranging Colour Temperature Adjustment

Colour temperature can be adjusted across a wide range, from 2,600-10,000K. This is an important function for signage displays used in broadcasting, retail, food and other industries where image reproduction in true colours and tones is vital.



Power-on Delay

For installations employing numerous monitors, the power-on delay function allows each monitor to be set to power-up between 2-50 seconds after power is supplied. This allows the monitors to power-up sequentially, avoiding inrush current problems and reducing overall electrical load requirements when using the same power supply.



Auto Adjust & Auto Set-up

Automatically adjusts the screen position, phase and clock when the input signal timing is changed. In addition, Auto Set-up quickly adjusts more items such as screen size and white and black levels with a single touch via the IR remote control.

IR Remote Lock

The remote-control receiver can be turned off to prevent unauthorized personnel from changing display settings or selected inputs.

















Built-in Speakers (for LDT551V)

Two 10W built-in speakers are equipped.

Other Features

Other features include side border colour select; and for the LDT551V, colour matching for multi-screen applications and DisplayPort.

Full Line-up

		MDT Series LCDs Full HD				LDT Series LCDs				
Resolution		Full HD				WXGA	Full HD			
Size		42	52	55	65	32	42	46	55	
Model		 MDT421S	 MDT521S	 MDT551S	 MDT652S	 LDT323V	 LDT422V	 LDT461V2	 LDT551V	
Dimensions		 Unit: mm	 Unit: mm	 Unit: mm	 Unit: mm	 Unit: mm	 Unit: mm	 Unit: mm	 Unit: mm	
Specifications										
Orientation		Landscape/Portrait 42" (1067mm)	Landscape/Portrait/Face-up 52" (1322mm)	Landscape/Portrait/Face-up 54.6" (1388mm)	Landscape/Portrait 64.5" (1639mm)	Landscape/Portrait 31.5" (800mm)	Landscape/Portrait 42" (1067mm)	Landscape/Portrait 46" (1168mm)	Landscape/Portrait 54.6" (1388mm)	
LCD module		Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	Screen size (diagonal) Panel type Pixel pitch Resolution Colour Brightness Contrast ratio Viewing angle (CR≥10) Response time	
Viewing area		930 × 523mm (36.6 × 20.6")	1152 × 648mm (45.4 × 25.5")	1209 × 680mm (47.6 × 26.8")	1428 × 804mm (56.2 × 31.6")	698 × 392mm (27.5 × 15.4")	930 × 523mm (36.6 × 20.6")	1018 × 573mm (40.1 × 22.5")	1209 × 680mm (47.6 × 26.8")	
Power management		VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Contrast, Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Position, Phase, Clock	VESA DPM VESA DDC2B, DDC/CI Contrast, Position, Phase, Clock	
OSD user functions		Brightness, contrast, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, etc.	Brightness, contrast, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, CAT5 control, etc.	Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, Programmable LUT, etc.	Brightness, contrast, black level, auto brightness, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, etc.	Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, CAT5 control, LAN control, closed caption, etc.	Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, heat status, power-on delay, schedule, tiling, etc.	Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, Programmable LUT, etc.	Brightness, contrast, black level, zoom, PIP, screensaver, side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT5 control (option), LAN control, closed caption, Programmable LUT, etc.	
PC input/output		Input connector (Analog) (Digital) Output connector (Analog) CAT5 input CAT5 output Horizontal frequency Vertical frequency Video signal	Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort	Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort	Mini D-sub 15-pin HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common), DisplayPort	Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common)	Mini D-sub 15-pin, BNC (R, G, B, H, V) HDMI × 2 (PC/AV common)	Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common)	Mini D-sub 15-pin, BNC (R, G, B, H, V; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP*, PC/AV common)	
Input/Output signal		Sync signal Resolutions supported	Analog: separate (TTL), composite (0.3V), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (0.3V), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMD5 640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	
AV input/output		Input connector (Analog) (Digital) Output connector Resolutions supported	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	Composite video <BNC>, S-terminal, BNC(Y/Pb/Pr; PC/AV common) HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)	
Audio input/output		Input connector (Analog) (Digital) Output connector	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	RCA pin jacks (L/R)	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	RCA pin jacks × 2 (L/R), stereo mini jack HDMI	
Speaker/Audio output		External speaker jacks (7W+7W)	External speaker jacks (7W + 7W) and internal speakers (10W + 10W)	External speaker jacks (7W + 7W) and internal speakers (10W + 10W)	External speaker jacks (7W + 7W) and internal speakers (10W + 10W)	External speaker jacks (7W+7W)	External speaker jacks (7W+7W)	External speaker jacks (7W + 7W) and internal speakers (10W + 10W)	External speaker jacks (7W + 7W) and internal speakers (10W + 10W)	
Control input/output		Input connector Output connector	RS-232C<D-sub 9-pin>	RS-232C<D-sub 9-pin>	RS-232C<D-sub 9-pin>, LAN <modular 8-pin>	RS-232C<D-sub 9-pin>	RS-232C<D-sub 9-pin>	RS-232C<D-sub 9-pin>, LAN <modular 8-pin>	RS-232C<D-sub 9-pin>, LAN <modular 8-pin>	
USB hub		—	Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0	Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0	Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0	—	—	Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0	Self/bus-powered, 2 upstream (option slot/external connection)/4 downstream, USB2.0	
OPS slot		—	—	—	—	—	—	—	—	
Power supply		Voltage, Current Consumption Consumption in sleep mode	Max.: 232W (214W w/o speakers) Less than 3W (CAT5: 5W)	Max.: 380W (360W w/o speakers) Less than 1W (CAT5: 5W)	Max.: 316W (293W w/o speakers) Factory default settings: 202W Less than 1W (CAT5: 5W)	Max.: 458W (445W w/o speakers) Factory default settings: 361W Less than 3W (CAT5: 5W)	Max.: 103W (85W w/o speakers) Less than 2W	Max.: 203W (182W w/o speakers) Factory default settings: 136W Less than 5W	Max.: 265W (245W w/o speakers) Less than 5W	
Operating environment		Temperature Humidity	Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)	Landscape mode: 5-40°C (41-104°F) Portrait mode/Face-up mode: 5-35°C (41-95°F)	Landscape mode: 5-40°C (41-104°F) Portrait mode/Face-up mode: 5-35°C (41-95°F)	Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)	Landscape mode: 5-40°C (41-104°F) Portrait mode: 5-35°C (41-95°F)			
Dimensions (WxHxD)		Net Overall	966 × 559 × 116mm (38.0 × 22.0 × 4.6") 1130 × 280mm (44.5 × 28.0 × 11.0")	1202 × 698 × 122mm (47.3 × 27.5 × 4.8") 1405 × 951 × 275mm (55.3 × 37.4 × 10.8")	1251 × 721 × 127mm (49.3 × 28.4 × 5.0") 1474 × 938 × 346mm (58.0 × 36.9 × 13.6")	1498 × 873 × 139mm (59.0 × 34.4 × 5.5") 1774 × 1200 × 375mm (69.8 × 47.2 × 14.8")	789 × 476 × 133mm (31.1 × 18.7 × 5.2") 930 × 645 × 325mm (36.6 × 25.4 × 12.8")	1023 × 614 × 133mm (40.3 × 24.2 × 5.2") 1150 × 775 × 295mm (45.3 × 30.5 × 11.6")	1122 × 663 × 136mm (44.2 × 26.1 × 5.4") 1285 × 885 × 275mm (50.6 × 38.8 × 10.8")	
Weight		Net Gross	Approx. 23.5kg/51.8lbs Approx. 31.0kg/68.3lbs	Approx. 40.0kg/88.2lbs Approx. 49.0kg/108.0lbs	Approx. 37.0kg/81.6lbs Approx. 47.5kg/104.7lbs	Approx. 46.5kg/102.5lbs Approx. 62.4kg/137.6lbs	Approx. 14.5kg/32.0lbs Approx. 20.0kg/44.1lbs	Approx. 20.5kg/45.2lbs Approx. 27.7kg/61.1lbs	Approx. 28.0kg/61.6lbs Approx. 35.0kg/77.0lbs	
Wall mounting interface		12 holes, M6 screws (100mm (4.0") pitch) for monitor mount	8 holes, M8 screws (200mm (7.9") pitch) for monitor, 4 holes × 2 sets, M4 screws (100mm (4.0") pitch) for SBC, Signage player mounted on monitor			12 holes, M6 screws (100mm (4.0") pitch) for monitor mount				
Regulation/Guideline compliance		UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/C-Tick/RoHS/US Mercury/CCC only for Chinese model			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-A/DOC-A/C-Tick/RoHS/US Mercury/Energy Star/CCC only for Chinese model		UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/C-Tick/RoHS/US Mercury/CCC only for Chinese model		UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/C-Tick/RoHS/US Mercury/CCC only for Chinese model	
Accessories		Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps, etc.	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps (for power cord and HDMI cable), CAT5 transmitter box, CD-ROM (USB driver), etc.	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps (for power cord and HDMI cable), etc.	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), CAT5 transmitter box, CD-ROM, etc.	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps, etc.	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), clamps and screws for securing panel	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), clamps and screws for securing panel	Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, wireless remote control, batteries, clamps, main power switch cover, cable bands, etc.	
Functions & Features										
Colour temperature		2600-10000K (100K step)								
Digital zoom		✓ (custom zoom)								
Tiling and frame compensation		Max. 5 × 5								
PIP/PoP		PIP, PoP, Side-by-side								
Scheduling		✓								
Screensaver (Motion)		✓								
Side border colour		✓								
Power-on delay		✓								
Long cable compensation		—								
Monitor control (RS-232C)		✓ (In/Out)								
Monitor control (LAN)		—								
OPS		—								
CAT5 receiver		Option								
Auto Brightness		✓								

* HDCP compatibility is not supported when DVI-D is connected to a Macintosh computer. HDCP: High-bandwidth Digital Content Protection * Values shown in the Specifications chart are typical values; actual values may vary depending on individual unit differences.

Options

Stereo Speakers



*Photos show units with speakers attached.

Stands



Coloured Bezels



A construction allowing the bezel to be changed by the user has been adopted. Please contact a local dealership for more information.

Other Options





Model Name	Stereo Speakers						Stands				CATS Kit		SDI Box
	SP-321V	SP-422V	SP-461V	SP-421S	SP-521S	SP-551S	ST-322V	ST-422V	ST-461V	ST-521S	DP-1CA5	DP-2CA5-T/DP-2CA5-R	DP-1SDI-3G
LDT323V	✓	—	—	—	—	—	✓	—	—	—	—	—	—
LDT422V	—	✓	—	—	—	—	—	✓	—	—	—	—	—
LDT461V2	—	—	✓	—	—	—	—	—	✓	—	—	—	—
LDT551V	—	—	—	—	—	✓	—	—	—	—	—	—	—
MDT421S	—	—	—	✓	—	—	—	—	✓	—	—	—	—
MDT521S	—	—	—	—	✓	—	—	—	✓	—*	—*	—	—
MDT551S	—	—	—	—	—	✓	—	—	—	—	—	✓	—
MDT652S	—	—	—	—	—	✓	—	—	—	—*	—*	—	✓

*The CATS Kit is standard equipment for MDT521S/MDT652S.

Connector Terminals

MDT Connector Terminals

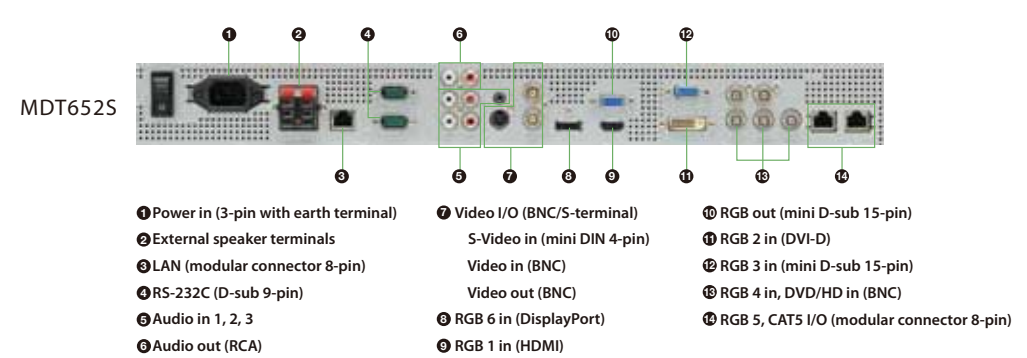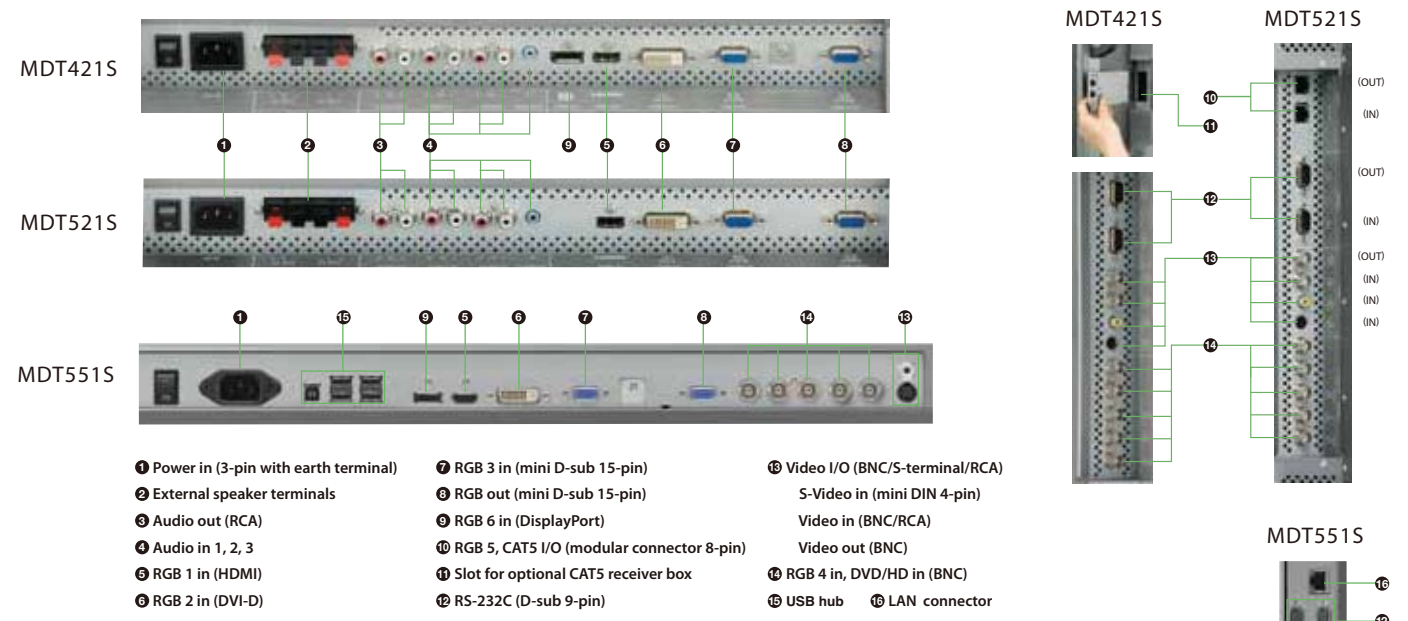

LDT Connector Terminals

