


# RGB Laser ODL-715

70" laser-lit rear-projection video walls for 24/7 control rooms

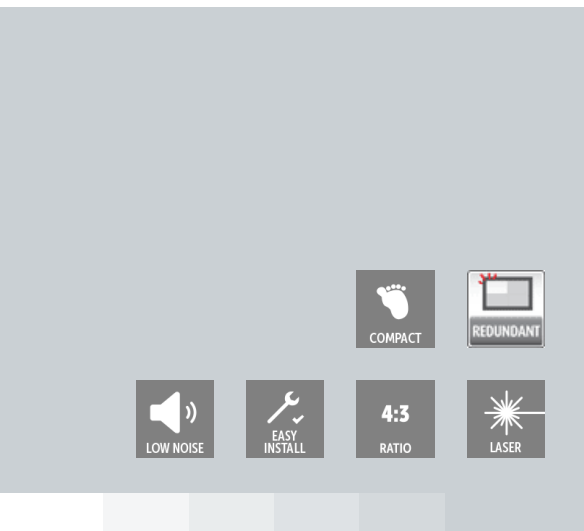

- 50% more brightness than mainstream LED-lit rear-projection video walls
- 25% less power consumption at higher brightness levels
- More than 11 years of uninterrupted operation in 24/7 mode
- Unmatched colors, focus, and contrast levels
- Silent like never before ('library' noise level)
- Redundancy of critical components for ultimate peace of mind
- 50% setup-time reduction (motorized 7-axis alignment)

Powered with the latest laser technology, Barco's RGB laser rear-projection video walls deliver unseen brightness levels and vibrant colors, while offering a very low total cost of ownership (TCO). With its 10th generation of rear-projection video walls, Barco again raises the bar for critical infrastructure visualization.

#### Higher brightness, for use in any environment

Providing 50% more brightness than mainstream 70" LED-lit rear-projection video walls, the RGB Laser series removes all brightness issues of earlier video walls. The high luminance allows operation under daylight conditions, so control rooms can finally light up - which improves operator working conditions! Adding vibrant colors to this mix (making all nuances clearly distinguishable), ensures that nothing is wrongly interpreted, and situational awareness is enriched.

#### Over 11 years of uninterrupted 24/7 operations

With the RGB laser for 24/7 control rooms series, Barco takes another giant leap forward in terms of reliability. With a light source lifetime of at least 125,000 hours in both normal and eco-mode, and redundancy of all critical components (including power supply, inputs, and laser drivers), nothing is left to chance when it comes to uptime. Unlike technology used by others and for non-24/7 environments, Barco's RGB laser display series doesn't need a rotating color wheel to operate. Since each color can be uniquely controlled and is not dependent on the segment of a color wheel, it provides color control like never before and eliminates color breakup.

#### Automatic calibration and alignment

The engine of Barco's RGB laser for 24/7 control rooms is fully motorized. Installers and maintenance staff will never need to open up the individual modules to perfectly align the individual cubes of the video wall. Using a web interface, the video wall can be remotely aligned by a single technician - including keystone correction. Combined with the Sense X automatic calibration system, which continuously measures and adjusts brightness and color levels over the complete video wall, users are sure the complete canvas is perfectly balanced at any time.

## PRODUCT SPECIFICATIONS

## RGB LASER ODL-715

|                                      |   |                       |                              |                 |
|--------------------------------------|---|-----------------------|------------------------------|-----------------|
| Resolution                           | SXGA+ (1400x1050)   |                       |                              |                 |
| Screen                               | <Under  | Native                | color                        | gamut           |
|                                      | Screen type   | FXS Stitched          | Light source lifetime (hrs)* | Power usage (W) |
|                                      | Boost   | 660 cd/m <sup>2</sup> | 60,000                       | 260             |
|                                      | Normal  | 510 cd/m <sup>2</sup> | 125,000                      | 200             |
|                                      | Eco   | 255 cd/m <sup>2</sup> | 125,000                      | 120             |
|                                      | Horizontal half gain viewing angle  | 34°                   | -                            | -               |
|                                      | Vertical half gain viewing angle  | 33°                   | -                            | -               |
| On-screen contrast                   | 1800:1  |                       |                              |                 |
| Color                                | Up to 170% REC709 color triangle  |                       |                              |                 |
| Display technology                   | Rear projection DLP (Rear Access only)  |                       |                              |                 |
| White point                          | Customized white points   |                       |                              |                 |
| Brightness uniformity                | Typ. >95% ANSI 9 Typ. >90% ANSI 13  |                       |                              |                 |
| Screen gap                           | < 0.2 mm   0.008" stitched  |                       |                              |                 |
| Color stability                      | Sense X automatic calibration   |                       |                              |                 |
| Dimensions                           | <ul style="list-style-type: none"> <li>■ Diagonal: 70" nominal</li> <li>■ Width: 1,400 mm / 55.1"</li> <li>■ Height: 1,050 mm / 41.3"</li> <li>■ Depth: 983 mm / 38.7"</li> </ul> |                       |                              |                 |
| Light source                         | RGB lasers illumination   |                       |                              |                 |
| Redundancy                           | Redundant laser banks with redundant power supply drivers, input signal & external power supply   |                       |                              |                 |
| Light source lifetime                | > 125,000 hrs in both Normal and Eco mode*  |                       |                              |                 |
| Noise Level                          | Less than 20 dB (measured from 3 meters in front)   |                       |                              |                 |
| Conditions for operation             | 10°C-40°C   50°F-104°F<br>Up to 80% humidity (non-condensing)   |                       |                              |                 |
| AC input voltage                     | 100 – 240 VAC, 50-60Hz  |                       |                              |                 |
| Power                                | 120W (eco)<br>200W (normal)   |                       |                              |                 |
| Heat dissipation                     | 390 BTU/h (eco)<br>680 BTU/h (typ.)<br>860 BTU/h (max)  |                       |                              |                 |
| Connectivity                         | Redundant Dual link DVI (HDCP compliant)  |                       |                              |                 |
| Signal processing                    | Loop through<br>Cropping, scaling with wall configuration   |                       |                              |                 |
| Direct ethernet access               | Built in web server   |                       |                              |                 |
| Graphical user interface             | All settings and operational parameters   |                       |                              |                 |
| Integration to third party equipment | WEB service API   |                       |                              |                 |
| Warranty                             | 2 years   |                       |                              |                 |
| Notes                                | * for ODL Gen2 engine   |                       |                              |                 |

Last updated: 15 Sep 2020

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.